

COMMERCIAL TRIMRIB ROOFING PARAPET DETAIL

EX 50mm H3.1 TIMBER CAPPING SUPPORT ON DPC

SEPERATION BARRIER BETWEEN CONCRETE
& FLASHING (SELF ADHESIVE TAPE OR SIM)

R.I. 0.55mm PARAPET FLASHING

PROFILED FOAM CLOSURE STRIP (2)

12x55 STEELTEK & NEO WITH
SELECTED WASHER SYSTEM

R.I. 0.55mm APRON FLASHING
NOTCHED TURN-DOWN OVER
TRIMRIB, GAP 5mm MAX CLEAR
OF TROUGH OF ROOFING

ROOFING INDUSTRIES
TRIMRIB

UNDERLAY LAID OVER
SAFETY NETTING

STEEL PURLIN & CLEAT


STRUCTURAL STEEL

DETAIL NO. CTR007A
DATE DRAWN 28/03/12
FILE REFERENCE RI-CTR007A.DWG

FIX CAPPING TO CONCRETE WITH MASONRY
FASTENERS AT 600mm CRS

NOTE:
(1) MINIMUM PITCH 3°
(2) FOAM CLOSURE STRIP ONLY REQUIRED IN HIGH
RISK SITUATIONS OF WIND BLOWN MOISTURE ENTERING.

- NOTES:
- These details are generally in compliance with the NZ Metal Roof & Wall Cladding Code of Practice and in some cases specific details by 'Roofing Industries'.
 - The building designer is ultimately responsible to ensure that details used meet the requirements of the NZ Building Code for the specific project.
 - Details of the supporting structure are indicative only and are the responsibility of the building designer.
 - Thermal break or cavity battens may be required in some circumstances.
 - Underlay selection and building wrap types are the responsibility of the designer, Alternative support to galvanised netting should be used in severe coastal environments including when aluminium is used.
 - These details are for Roofing Industries profile/s as nominated and may not be applicable to other profiles.
 - This drawing is the copyright of 'Roofing Industries' and can only be copied or reproduced with their permission.
 - Further information can be obtained from the NZ Metal Roof & Wall Cladding Code of Practice www.metalroofer.org.nz & www.roof.co.nz
 - Where necessary adjust drawings for purlin battens or cavity battens.
 - Details are for steel based materials, other substrate may require some changes.

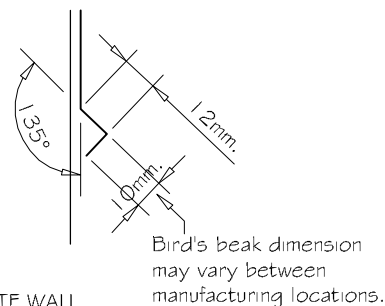

©COPYRIGHT DETAIL 2012



A PARAPET DETAIL
1:5