

COMMERCIAL TRIMRIB ROOFING TYPICAL WALL/ROOF JUNCTION AT HEAD OF ROOF (Soft Edge)

DETAIL NO. CTRO10B
DATE DRAWN 28/03/12
FILE REFERENCE RI-CTRO10B.DWG

ROOFING INDUSTRIES TRIMRIB
(OR OTHER PROFILE) WALL CLADDING

BUILDING WRAP (IF REQUIRED)

12x20 STEEL TEK PAN FIXED

HEM TO FLASHING EDGE

PROFIED FOAM CLOSURE STRIP (2)


12x55 STEELTEK & NEO WITH
SELECTED WASHER SYSTEM

R.I. 0.55mm APRON FLASHING
SOFT EDGE DRESSED OVER
TRIMRIB

ROOFING INDUSTRIES
TRIMRIB

UNDERLAY LAID OVER
SAFETY NETTING

STEEL PURLIN & CLEAT

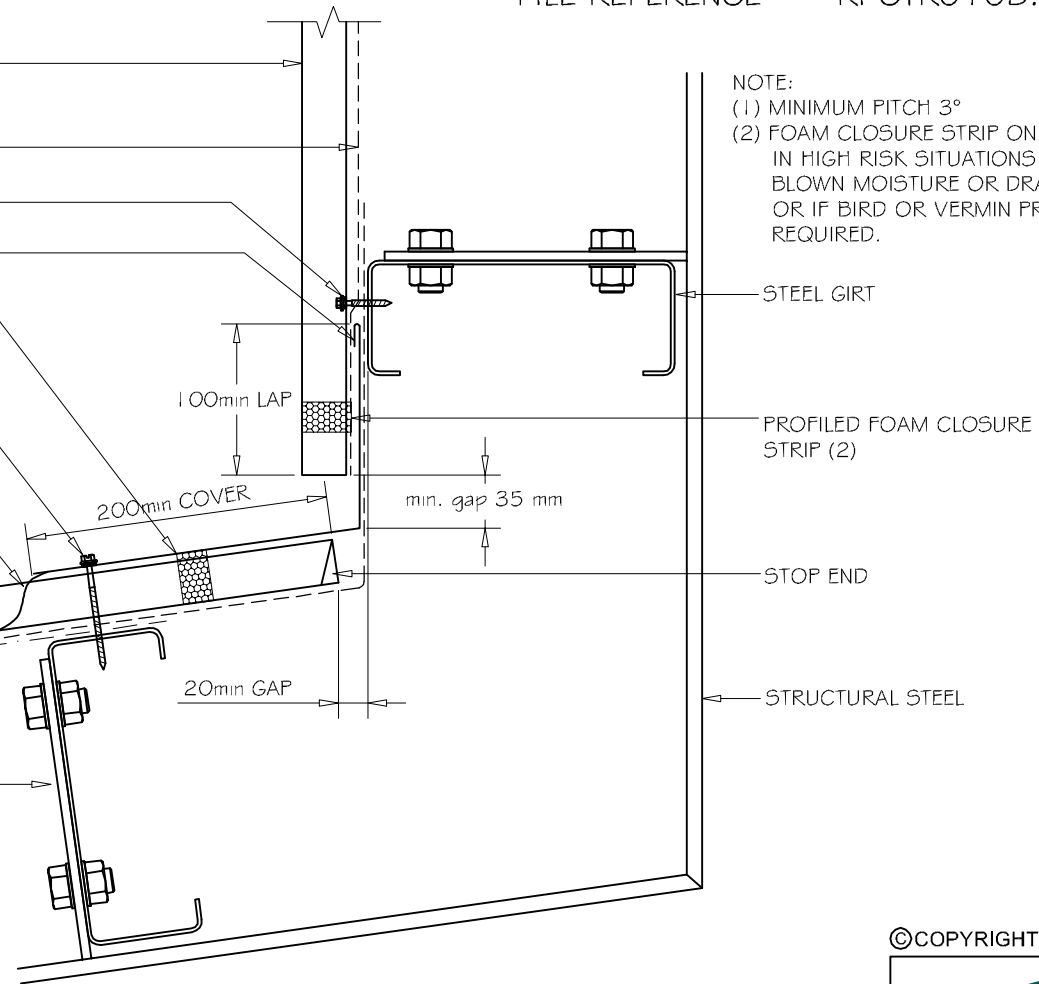

NOTE:
(1) MINIMUM PITCH 3°
(2) FOAM CLOSURE STRIP ONLY REQUIRED
IN HIGH RISK SITUATIONS OF WIND
BLOWN MOISTURE OR DRAFTS ENTERING
OR IF BIRD OR VERMIN PROOFING IS
REQUIRED.

NOTES:

- These details are generally in compliance with the NZ Metal Roof & Wall Cladding Code of Practice and in some cases specific details by 'Roofing Industries'.
- The building designer is ultimately responsible to ensure that details used meet the requirements of the NZ Building Code for the specific project.
- Details of the supporting structure are indicative only and are the responsibility of the building designer.
- Thermal break or cavity battens may be required in some circumstances.
- Underlay selection and building wrap types are the responsibility of the designer. Alternative support to galvanised netting should be used in severe coastal environments including when aluminium is used.
- These details are for Roofing Industries profile/s as nominated and may not be applicable to other profiles.
- This drawing is the copyright of 'Roofing Industries' and can only be copied or reproduced with their permission.
- Further information can be obtained from the NZ Metal Roof & Wall Cladding Code of Practice www.metaloofers.org.nz & www.roof.co.nz
- Where necessary adjust drawings for purlin battens or cavity battens.
- Details are for steel based materials, other substrate may require some changes.



TYPICAL WALL/ROOF JUNCTION

1:5

©COPYRIGHT DETAIL 2012

