WHIRLPOOLS / BUBBLEMASSAGE 4.3 E

Product

- Evok rect BubbleMassage[™] bath
- Evok bath pillow in charcoal





Included Components

- 40mm chrome pop-up waste and overflow
- 1.5m flexible hose for blower connection
- Detached heated air blower air switch operation

Features

- Drop-in acrylic bath (fully reinforced)
- Multiple air holes releasing tiny bubbles


Optional Accessories

- Evok bath pillow in charcoal
- Tapware (page 6.0.1)

Related Products

- Evok baths (page 3.0.1)
- Evok whirlpools (page 4.0.1)

Technical Details

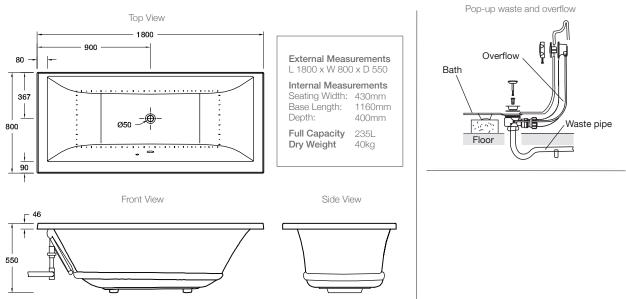

Installation Notes:

- Requires a 220-250V, 10A, 50Hz dedicated service on an ELCB or RCD protected circuit.
- Floor must provide support for a minimum of 400kg and must be level.
- Detached blower (supplied) allows for multiple installation positions and helps to keep blower noise to a minimum.
- A non return valve allows blower to be installed at any height.

New Zealand www.kohler.co.nz

Sizes are approximate. All measurements shown are in millimetres. Jul 2012 1182838-A04-C

