


/imondi

Recycled from old barns in Europe and America, the Imondi range is hand-crafted from genuine reclaimed timber and repurposed into rustic and textured planks.

Species	Reclaimed European Oak
Sustainability	FSC® Certified
Grade	Reclaimed Rustic
Texture	Rough / Reclaimed

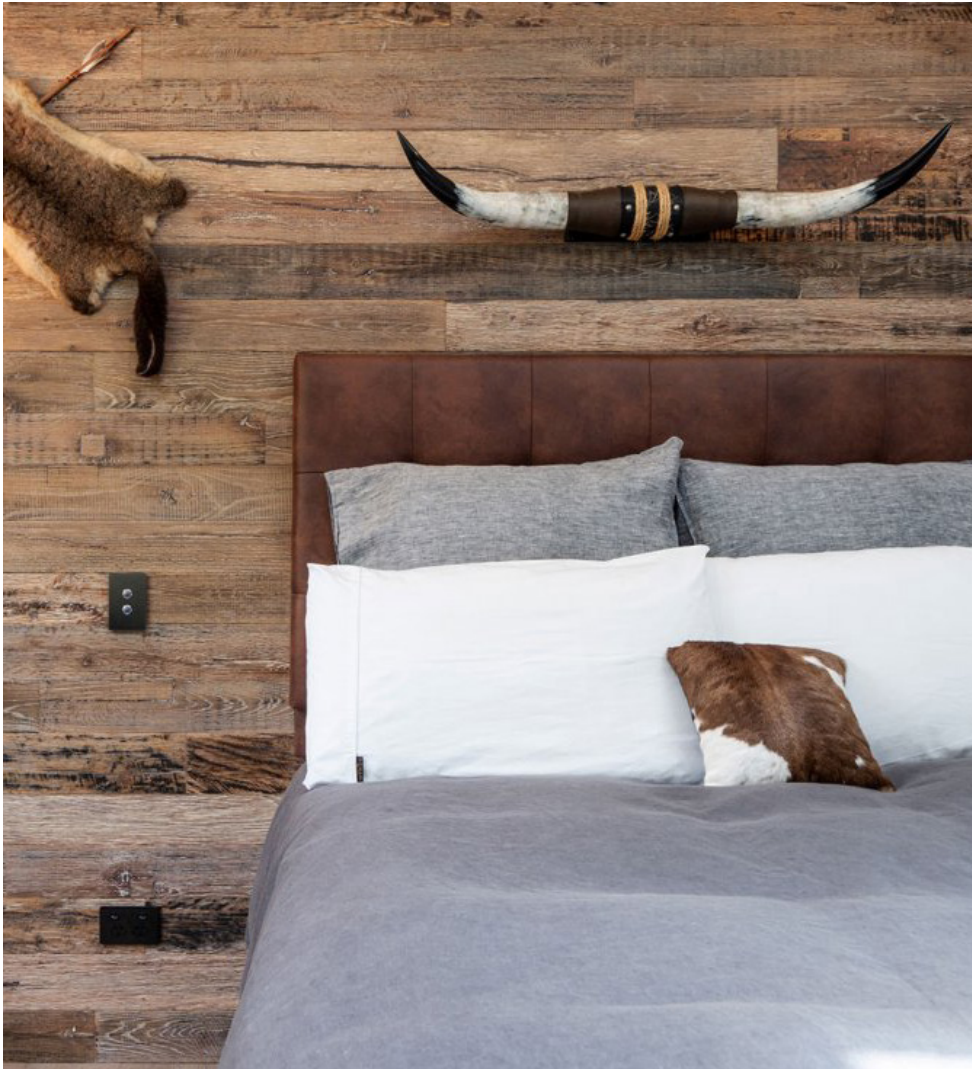

COLLECTION

Recycled from old barns in Europe and America, the Imondi range is hand-crafted from genuine reclaimed timber and repurposed into rustic and textured planks.

With a focus on hand-crafted and sustainable slab rescue, the finished products introduce an element of nature, depth and texture to interiors whilst infusing a spirit of history, innovation and creativity - a talking point in any interior.


This product has an engineered construction that minimises the waste of reclaimed timber by using it only on the face of the board, and a base made from cross-directional ply provides ultimate stability.






FORMATS

Imondi is available in mixed-width planks in two different colours and thicknesses.



15MM PLANK

Thickness	15/4mm
Width	95-135mm
Length	400-2200mm
Construction	2-Layer Engineered



21MM PLANK

Thickness	21/6mm
Width	50-230mm
Length	400-2200mm
Construction	2-Layer Engineered

WEATHERED OAK



BROWNSTONE OAK





COLOURS

Imondi adds an element of nature, depth and texture to interiors whilst infusing a spirit of history, innovation and creativity – a talking point in any interior.



Format

Grade

Code

WEATHERED OAK

Plank

Rustic

IM-WSP



BROWNSTONE OAK

Plank

Rustic

IM-BSP

PRODUCT DETAILS

Species	Reclaimed European Oak
Origin	Central Europe and America
Grade	Reclaimed Rustic
Thickness	15 / 21mm
Wear Layer	4 / 6mm
Bevel	None
Construction	2-Layer Engineered
Core	Plywood
Surface Texture	Rough / Reclaimed
Finish	Pre-finished Natural Oil
Surface Sheen	Matte

INSTALLATION

Method	Glue Down or Secret Pin
Joint Profile	Tongue and Groove
Substrates ^A	Plaster Board/Plywood/MDF Board ^A
Applications	Walls/Ceilings/Other
Usage Classes	Residential/Commercial
Wet Area Suitability	Contact Forté

A. Enquire about others

B. Group 1 Fire Rating for Walls and Ceilings can be achieved with an intumescent coating

STRUCTURAL WARRANTY

Residential	25 Years
Commercial	5 Years

SUSTAINABILITY

Certification	FSC® Certified
---------------	----------------

TECHNICAL SPECIFICATIONS

Reaction to Fire	Walls/Ceilings ^B : Group 3/Class Cf1-s1
Wear Layer Density	650kg/m ³

FORMALDEHYDE EMISSION

AS/NZS 2098.11	E1
----------------	----

Find us on
Masterspec



View Collection
on our website



Auckland
299 Great North Road
Grey Lynn, Auckland

Wellington
262 Thorndon Quay
Pipitea, Wellington

Queenstown
33 Brookes Road
Frankton, Queenstown

forte.co.nz
info@forte.co.nz
0508 35 66 77

forte