
## EUROSTYLE SPANLOK™ VARIABLE PAN ROOFING ON PLYWOOD TYPICAL CHANGE IN PITCH ON PLYWOOD SUBSTRATE

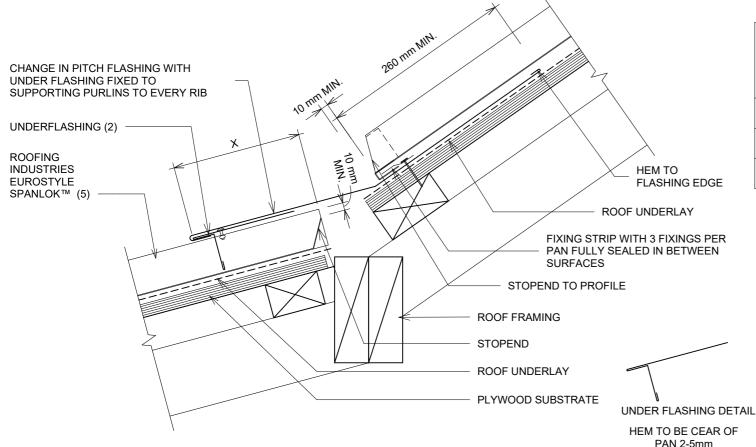

|                  | Х                                      | MINIMUM                    |
|------------------|--|----------------------------|
| SITE WIND ZONE   |  |                            |
| (As per NZS3604) | TRANSVERSE<br>FLASHING OVER<br>ROOFING | UPPER LAP<br>UNDER ROOFING |
| SITUATION 1      | 130mm                                  | 250mm                      |
| SITUATION 2      | 200mm                                  | 250mm                      |
| SITUATION 3      | (3)                                    |                            |

Detail Number: RI-ESVPRRPLY-050

Date drawn: 20/05/2024

Scale: 1:5@ A4

## DETAIL ANNOTATION:

- 1. SITUATION 1, 2 & 3 AS PER E2/AS1 TABLE 7
- 2. HIGH TO EXTRA HIGH WIND ZONE DOUBLE FIX UNDERFLASHINGS
- 3. NOT PERMITTED UNDER E2/AS1, REFER NZ METAL ROOF & WALL CLADDING CODE OF PRACTICE
- 4. FASTENERS TO BE COMPATIBLE WITH MATERIAL BEING FIXED AND THE SUITABLE GRADE FOR THE ENVIRONMENT IN WHICH LOCATED
- 5. CLIPS OMITTED FOR CLARITY

## GENERAL NOTES:

- These details are to be read with Roofing Industries SPANLOK™ Product Technical Statement and installation guide.
- These details are generally in compliance with E2/AS1 and/or the NZ Metal Roof & Wall Cladding Code of Practice and in some cases specific details by 'Roofing Industries'.
- The building designer is ultimatley responsible to ensure that details used meet the requirements of the NZ Building Code for the specific project.
- Details of the supporting structure including cavity battens are indicative only and are the responsibility of the building designer. For steel framed buildings thermal break cavity battens may be required.
- Roof/wall underlay selection are the responsibility of the designer. Underlay to be installed in accordance with underlay manufacturer's recommendations and requirements.
- These details are for Roofing Industries profile/s as nominated and may not be applicable to other profiles.
- This drawing is the copyright of 'Roofing Industries' and can only be copied or reproduced with their permission.
- Further information can be obtained from the NZ Metal Roof & Wall Cladding Code of Practice: www.metalroofing.org.nz or E2/AS1.
- Details are for steel based materials, other substrates may require some changes.
- All dimensions are nominal.

interactive assembly instructions available http://wksp.nz/ri-esl-bar interactive assembly composition available for workingSPEC from Apple App Store/Google Play