


# EUROSTYLE SPANLOK™ VARIABLE PAN ROOFING ON PURLINS PENETRATION FLASHING DETAILS

Detail Number: RI-ESVPRRPUR-190

Date drawn: 20/05/2024

Scale: 1 : 5@ A2

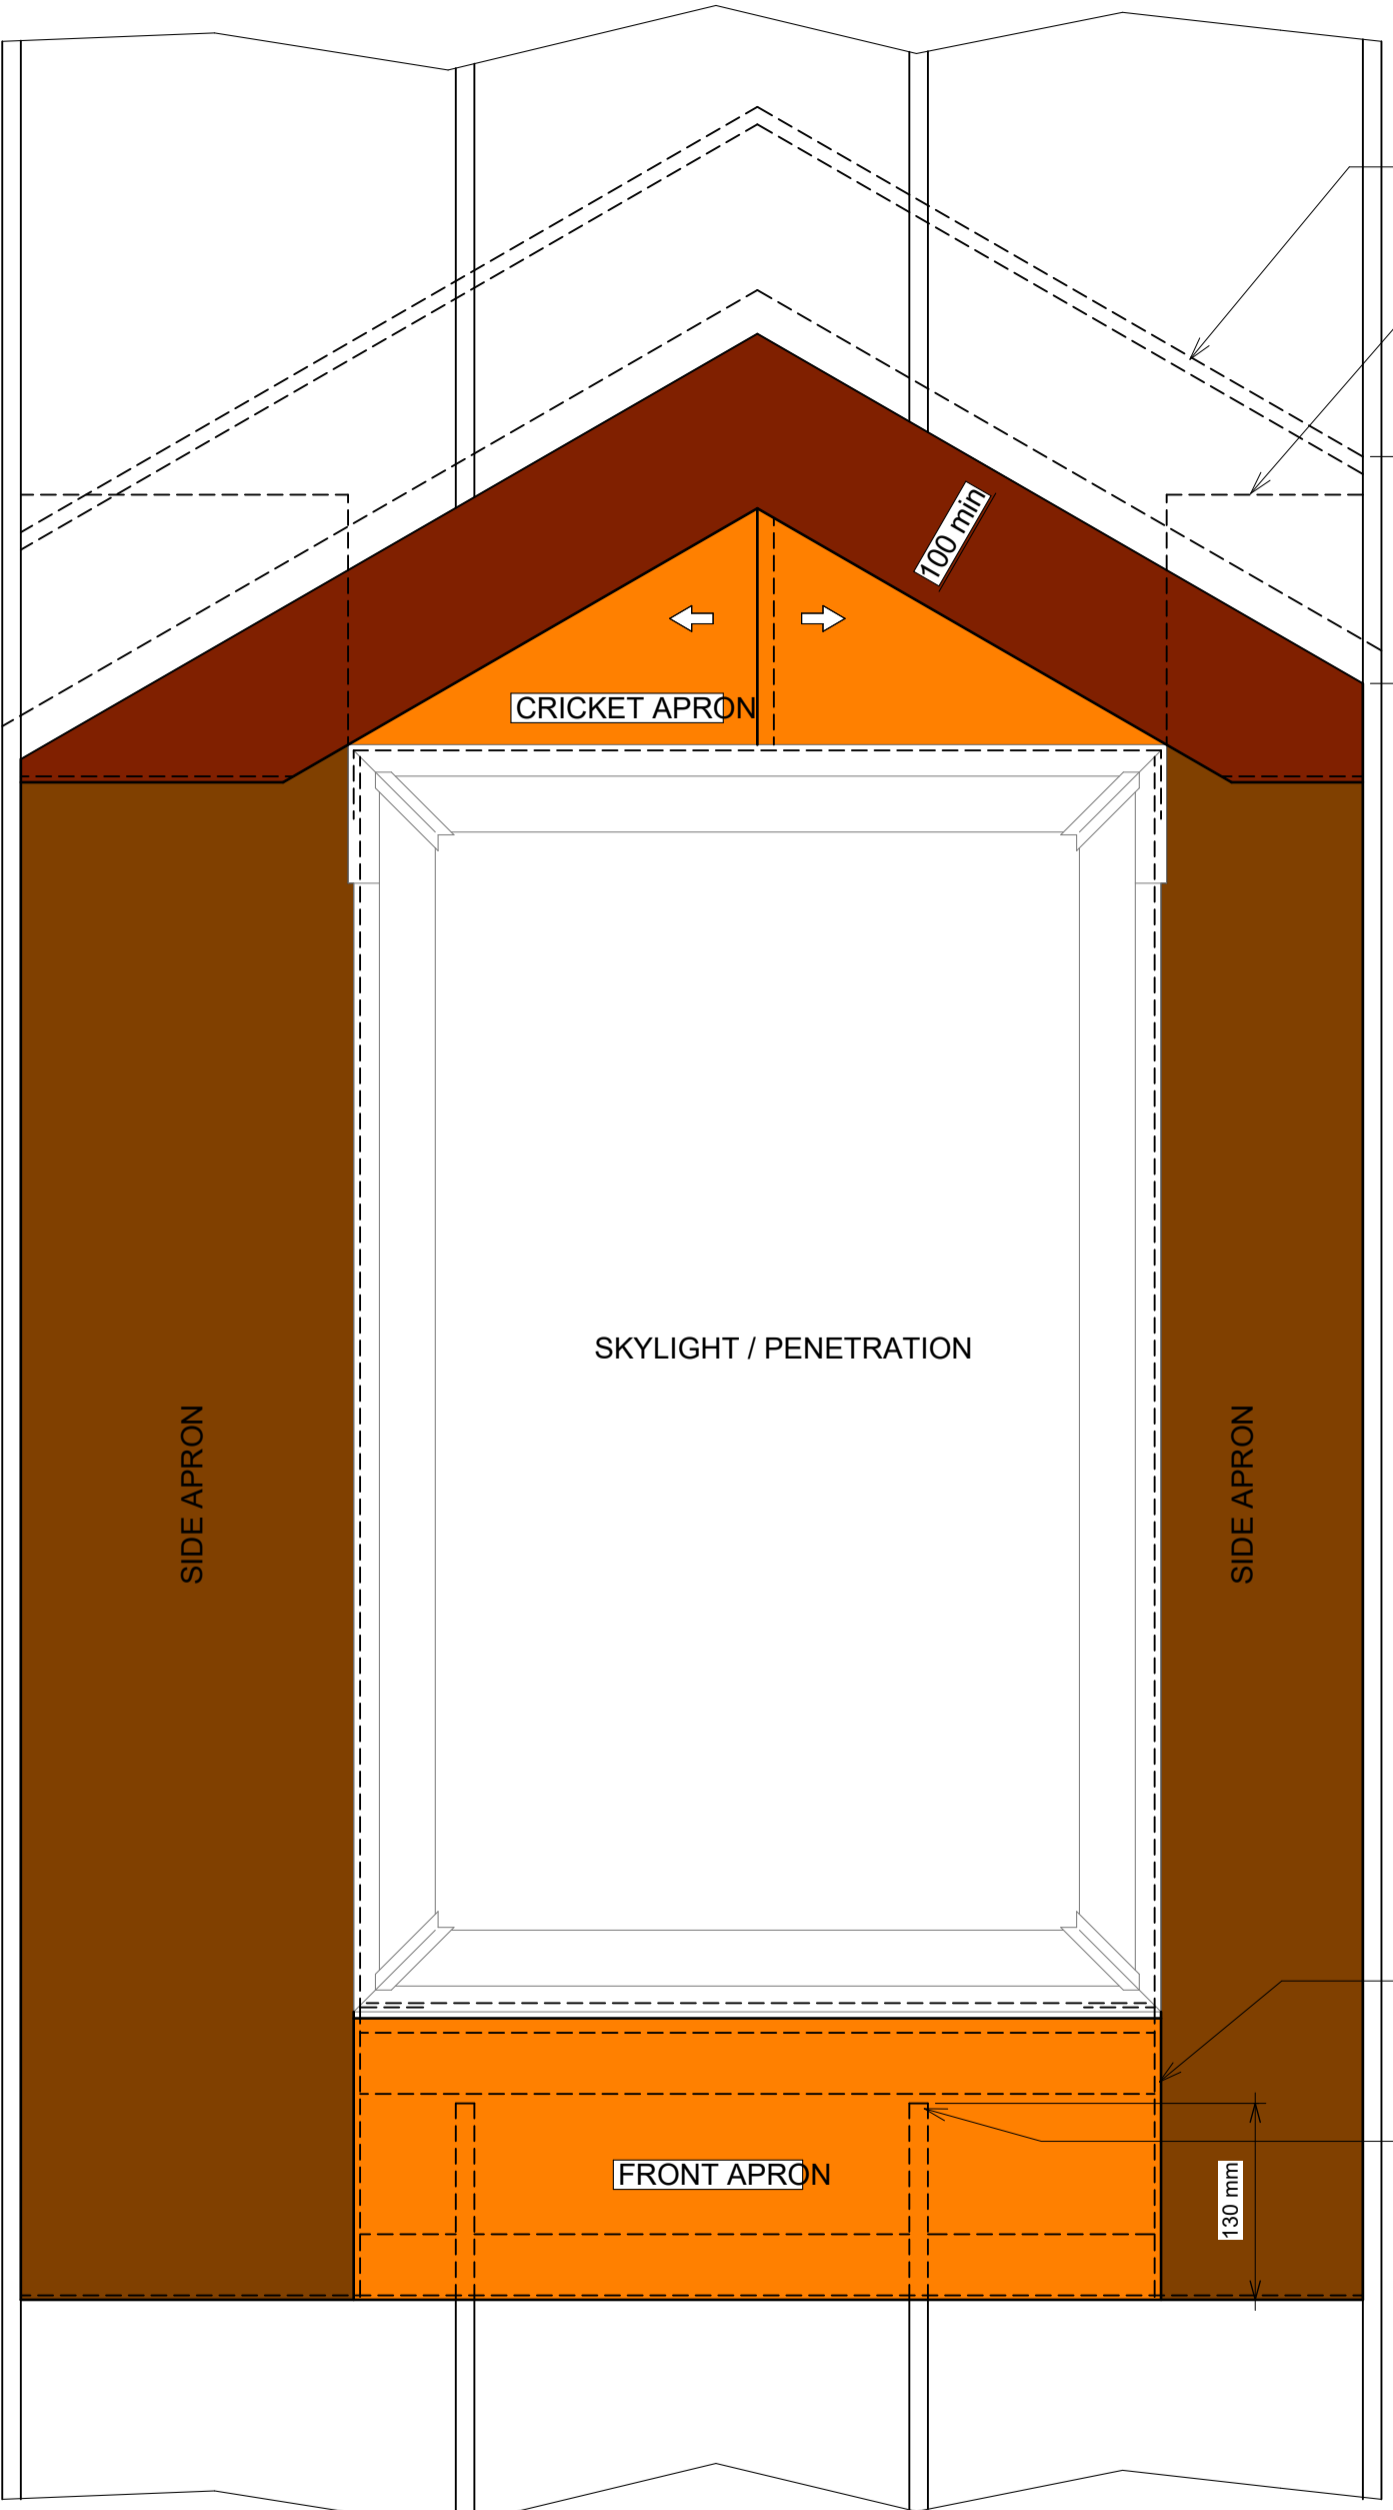

TOP OF CRICKET FLASHING BACKTRAY, 10mm HEM

SIDE APRON FLASHING UNDER PENETRATION FLASHING

150 mm

CRICKET APRON

SKYLIGHT / PENETRATION

SIDE APRON


SIDE APRON

FRONT APRON

130 mm

UNDER FLASHING FIXED TO PURLINS AT 200crs MAX

EUROSTYLE SPANLOK™ WITH STOP END

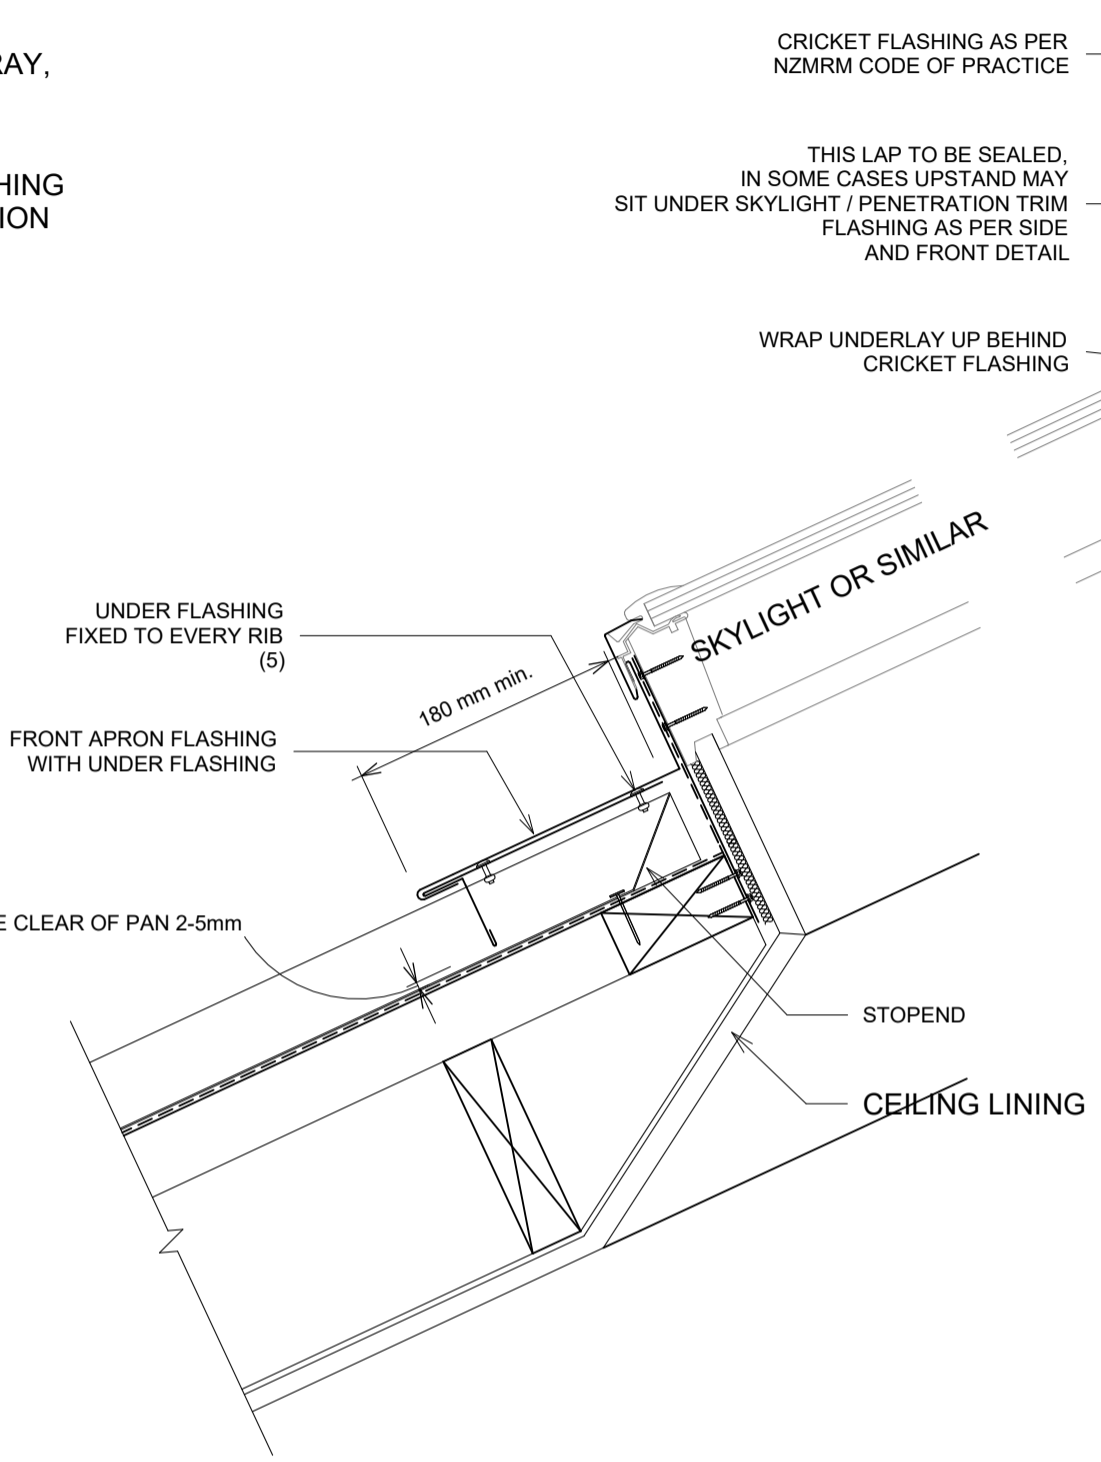

UNDER FLASHING FIXED TO EVERY RIB (5)

FRONT APRON FLASHING WITH UNDER FLASHING

HEM TO BE CLEAR OF PAN 2-5mm

180 mm min.

SKYLIGHT OR SIMILAR


STOPEND

CEILING LINING

CRICKET FLASHING AS PER NZMRM CODE OF PRACTICE

THIS LAP TO BE SEALED, IN SOME CASES UPSTAND MAY SIT UNDER SKYLIGHT / PENETRATION TRIM FLASHING AS PER SIDE AND FRONT DETAIL

WRAP UNDERLAY UP BEHIND CRICKET FLASHING

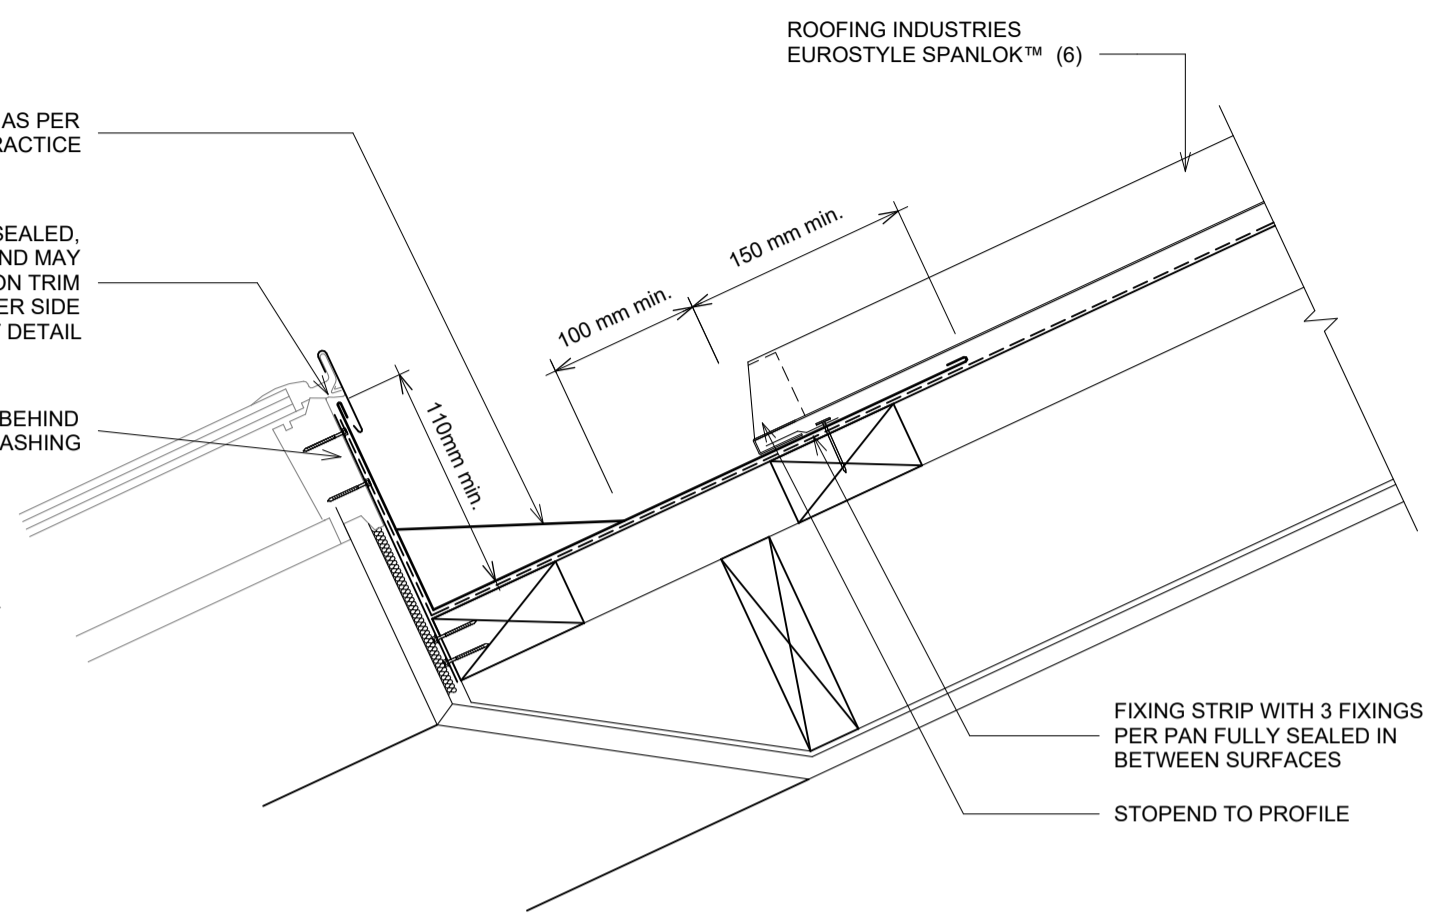


ROOFING INDUSTRIES EUROSTYLE SPANLOK™ (6)

FIXING STRIP WITH 3 FIXINGS PER PAN FULLY SEALED IN BETWEEN SURFACES

STOPEND TO PROFILE

**DETAIL ANNOTATION:**

1. REFER TO NZMRM CODE OF PRACTICE FOR CATCHMENT AREA LIMITATIONS.
2. REFER TO NZMRM CODE OF PRACTICE FOR FURTHER INFORMATION.
3. REFER TO SKYLIGHT MANUFACTURERS DETAILS AS SOME LOW PITCH INSTALLATIONS REQUIRE MODIFICATIONS TO THESE DETAILS.
4. SKYLIGHT MOUNTING BRACKETS ARE INDICATIVE ONLY AND DIFFERENT SKYLIGHTS / PENETRATIONS MAY REQUIRE DIFFERENT FRAMING, MOUNTING AND FLASHING DETAILS.
5. HIGH TO EXTRA HIGH WIND ZONE DOUBLE RIVET CLIPS OMITTED FOR CLARITY
- 6.

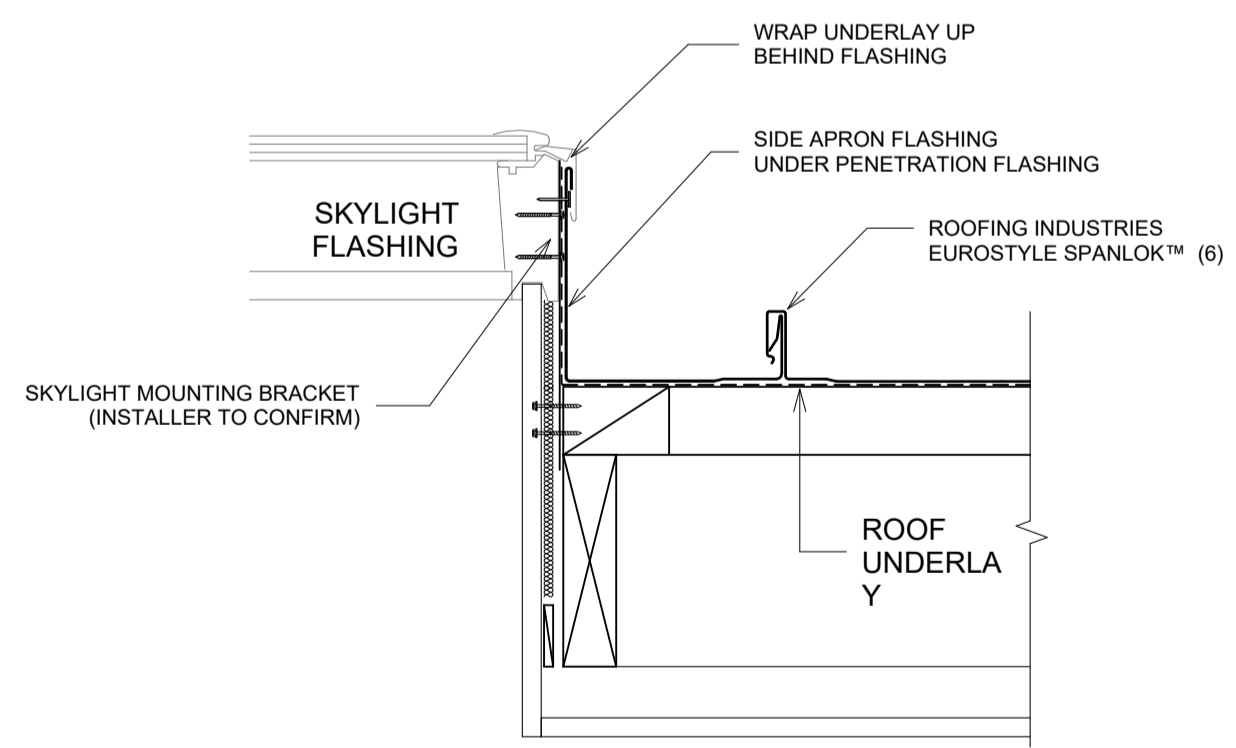

WRAP UNDERLAY UP BEHIND FLASHING

SKYLIGHT FLASHING

SIDE APRON FLASHING UNDER PENETRATION FLASHING

ROOFING INDUSTRIES EUROSTYLE SPANLOK™ (6)

SKYLIGHT MOUNTING BRACKET (INSTALLER TO CONFIRM)

ROOF UNDERLAY

**GENERAL NOTES:**

- These details are to be read with Roofing Industries profile technical summary regarding wind loads and fixings.
- These details are generally in compliance with E2/AS1 and/or the NZ Metal Roof & Wall Cladding Code of Practice and in some cases specific details by 'Roofing Industries'.
- The building designer is ultimately responsible to ensure that details used meet the requirements of the NZ Building Code for the specific project.
- Details of the supporting structure including cavity battens are indicative only and are the responsibility of the building designer. For steel framed buildings thermal break cavity battens may be required.
- Roof/wall underlay selection are the responsibility of the designer. Underlay to be installed in accordance with underlay manufacturer's recommendations and requirements.
- These details are for Roofing Industries profile/s as nominated and may not be applicable to other profiles.
- This drawing is the copyright of 'Roofing Industries' and can only be copied or reproduced with their permission.
- Further information can be obtained from the NZ Metal Roof & Wall Cladding Code of Practice: www.metalroofing.org.nz or E2/AS1.
- Details are for steel based materials, other substrates may require some changes.
- All dimensions are nominal.

interactive assembly instructions available

<http://wksp.nz/ri-esl-srp>



Get WORKINGSPEC from Apple App Store/Google Play

Copyright detail © 2024

