

CHARRED SPRUCE PANELLING SPECIFICATION SHEET

Salvare Charred Spruce Engineered T&G panelling by Forté. 17mm thick, 150mm wide and 1000/1200/2200mm lengths. Glue and pin installation method onto substrate. Pre-finished with Rubio Oil.



Charred Spruce Panelling

PRODUCT DETAILS

Collection	Salvare
Product Name	Charred Spruce Panelling
Code	SA-CSP
Product Type	Engineered Panel
Availability	Stocked
Total Thickness	17mm (± 0.2mm)
Width	150mm
Length	1000/1200/2200mm
Wear Layer	5mm Solid Spruce
Core	Birch Plywood
Construction	2-layer Engineered
Surface Texture	Brushed and Sugi Ban (refer page 2 for details)
Bevel	Square Edge
Status	Pre-finished (no additional coats required)
Finish	Rubio Oil
Species	Reclaimed Spruce
Crafted in	Europe

STRUCTURAL WARRANTY

5 Year Commercial	For terms and conditions see
25 Year Residential	www.forte.co.nz/warranties

SUSTAINABILITY

Reclaimed Product

INSTALLATION

Installation Method	Glue and pin
Suitable Substrates	Plywood, plaster board or framing – enquire for others
Joint Profile	Tongue & Groove (4 sides)
Suitable Applications	Walls, Ceilings
Suitable Uses	Residential homes, hospitality, retail stores, restaurants, apartments
Wet Area Suitability	Contact the Forté team for information 0508 35 66 77

TECHNICAL SPECIFICATIONS


Reaction to Fire (Walls & Ceilings)	Group 1S can be achieved with intumescent coating
Wear Layer Density	103kg/m ³ / 0.4–0.7
<u>Formaldehyde Emission</u>	
AS/NZS 2098.11	E0 (0.08 mg/L)

PACK INFORMATION

Pack Size	1.65m ²
Pieces per pack	3 full planks at 2200mm 2 planks at 1200mm 2 planks at 1000mm
Rows per pack	5
Pack Weight	21kg
Pack Dimensions	2200mm L x 160mm W x 100mm H

Plank Profile

SALVARE

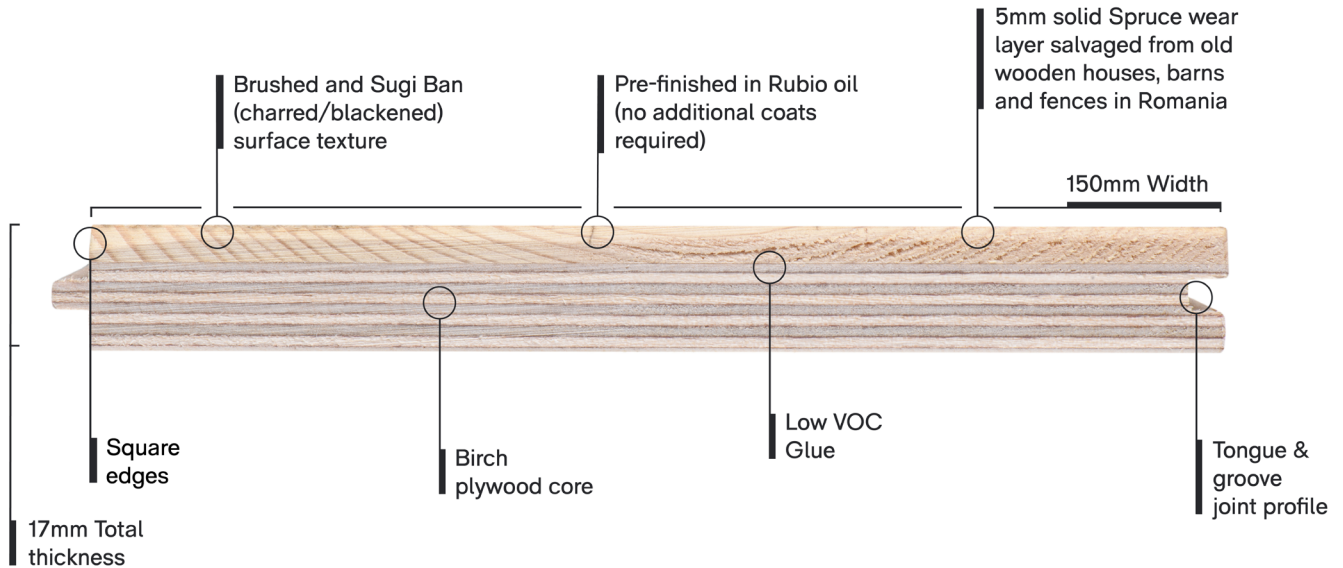

Sugi Ban Technique

APPLIED TO CHARRED SPRUCE PANELLING

Sugi Ban or Yaki Sugi is a Japanese heat treating process that results in a charred wood effect. Not only visually effective, Sugi Ban is appreciated for its improved longevity and fire resistance. Resulting in a healthy, sustainable building material for interiors.

Structural Warranty

SALVARE 25 YEAR RESIDENTIAL STRUCTURAL WARRANTY

Salvare Engineered Panelling comes with a full 25 year Residential Structural Warranty. For full warranty terms and conditions, please visit www.forte.co.nz/warranties

SALVARE 5 YEAR COMMERCIAL STRUCTURAL WARRANTY

Salvare Engineered Panelling comes with a full 5 year Commercial Structural Warranty. For full warranty terms and conditions, please visit www.forte.co.nz/warranties

Installation

THE SALVARE COLLECTION MUST BE INSTALLED BY A TRAINED PROFESSIONAL


Please ensure that you have read and understood the Forté Wall and Ceiling Installation Guidelines before proceeding to install Salvare Panelling. If you have any questions or concerns, please call the Forté technical team on 0508 35 66 77. Failure to adhere to the Forté Wall and Ceiling Installation Guidelines may void your warranty.

For full installation guidelines, please visit www.forte.co.nz/installation



SILVERED SPRUCE PANELLING SPECIFICATION SHEET

Salvare Silvered Spruce Engineered T&G panelling by Forté. 17mm thick, 150mm wide and 1000/1200/2200mm lengths. Glue and pin installation method onto substrate. Unfinished.

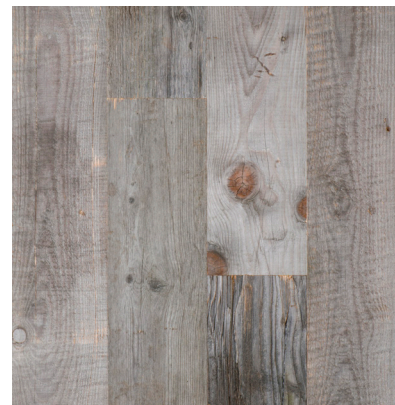

Silvered Spruce Panelling

PRODUCT DETAILS

Collection	Salvare
Product Name	Silvered Spruce Panelling
Code	SA-SSP
Product Type	Engineered Panel
Availability	Stocked
Total Thickness	17mm (± 0.1mm)
Width	150mm
Length	1000/1200/2200mm
Wear Layer	5mm Solid Spruce
Core	Birch Plywood
Construction	2-layer Engineered
Surface Texture	Natural Weathered
Bevel	Square Edge
Status	Unfinished (Can be custom coloured if required)
Species	Reclaimed Spruce
Crafted in	Europe

Salvare Silvered Spruce Panelling is also available in:
7mm Lamella

STRUCTURAL WARRANTY

5 Year Commercial	For terms and conditions see
25 Year Residential	www.forte.co.nz/warranties

SUSTAINABILITY

Reclaimed Product

INSTALLATION

Installation Method	Glue and pin
Suitable Substrates	Plywood, plaster board or framing – enquire for others
Joint Profile	Tongue & Groove (4 sides)
Suitable Applications	Walls, Ceilings
Suitable Uses	Residential homes, hospitality, retail stores, restaurants, apartments
Wet Area Suitability	Contact the Forté team for information 0508 35 66 77

TECHNICAL SPECIFICATIONS


Reaction to Fire (Walls & Ceilings)	Group 1S can be achieved with intumescent coating
Wear Layer Density	103kg/m ³ / 0.4–0.7
<u>Formaldehyde Emission</u>	
AS/NZS 2098.11	E0 (0.08 mg/L)

PACK INFORMATION

Pack Size	1.65m ²
Pieces per pack	3 full planks at 2200mm 2 planks at 1200mm 2 planks at 1000mm
Rows per pack	5
Pack Weight	21kg
Pack Dimensions	2200mm L x 160mm W x 100mm H

Plank Profile

SALVARE

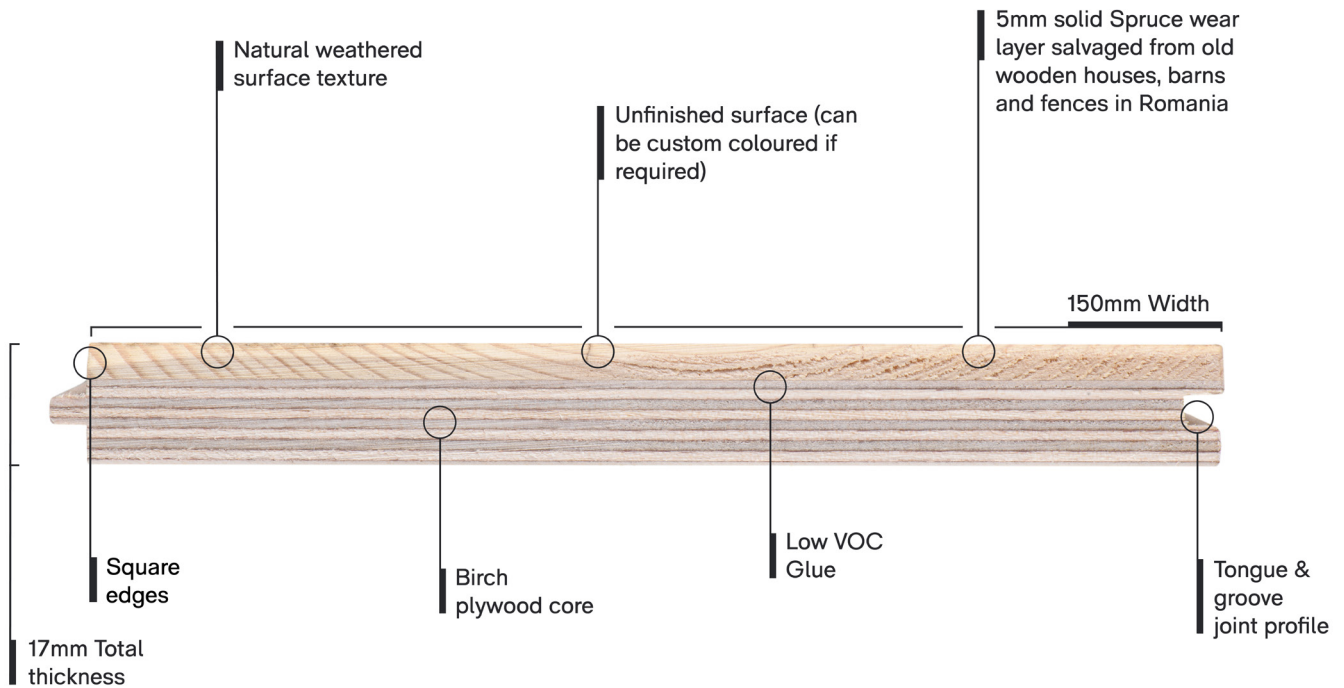

Structural Warranty

SALVARE 25 YEAR RESIDENTIAL STRUCTURAL WARRANTY

Salvare Engineered Panelling comes with a full 25 year Residential Structural Warranty. For full warranty terms and conditions, please visit www.forte.co.nz/warranties

SALVARE 5 YEAR COMMERCIAL STRUCTURAL WARRANTY

Salvare Engineered Panelling comes with a full 5 year Commercial Structural Warranty. For full warranty terms and conditions, please visit www.forte.co.nz/warranties

Installation

THE SALVARE COLLECTION MUST BE INSTALLED BY A TRAINED PROFESSIONAL

Please ensure that you have read and understood the Forté Wall and Ceiling Installation Guidelines before proceeding to install Salvare Panelling. If you have any questions or concerns, please call the Forté technical team on 0508 35 66 77. Failure to adhere to the Forté Wall and Ceiling Installation Guidelines may void your warranty.

For full installation guidelines, please visit www.forte.co.nz/installation



WHITE DISTRESSED SPRUCE PANELLING SPECIFICATION SHEET

White Distressed Spruce Engineered T&G panelling by Forté. 17mm thick, 150mm wide and 1000/1200/2200mm lengths. Glue and pin installation method onto substrate. Pre-finished with water-based paint



White Distressed Spruce Panelling

PRODUCT DETAILS

Collection	Salvare
Product Name	White Distressed Spruce Panelling
Code	SA-WDSP
Product Type	Engineered Panel
Availability	Stocked
Total Thickness	17mm (± 0.2mm)
Width	150mm
Length	1000/1200/2200mm
Wear Layer	5mm Solid Spruce
Core	Birch Plywood
Construction	2-layer Engineered
Surface Texture	Distressed and Painted
Surface Sheen	Matte
Bevel	Square Edge
Status	Pre-finished <i>(no additional coats required)</i>
Finish	2 layers of water-based paint
Species	Reclaimed Spruce
Crafted in	Europe

STRUCTURAL WARRANTY

5 Year Commercial	For terms and conditions see
25 Year Residential	www.forte.co.nz/warranties

SUSTAINABILITY

Reclaimed Product

INSTALLATION

Installation Method	Glue and pin
Suitable Substrates	Plywood, plaster board or framing – enquire for others
Joint Profile	Tongue & Groove (4 sides)
Suitable Applications	Walls, Ceilings
Suitable Uses	Residential homes, hospitality, retail stores, restaurants, apartments
Wet Area Suitability	Contact the Forté team for information 0508 35 66 77

TECHNICAL SPECIFICATIONS


Reaction to Fire (Walls & Ceilings)	Group 1S can be achieved with intumescent coating
Wear Layer Density	103kg/m ³ / 0.4–0.7
<u>Formaldehyde Emission</u>	
AS/NZS 2098.11	E0 (0.08 mg/L)

PACK INFORMATION

Pack Size	1.65m ²
Pieces per pack	3 full planks at 2200mm 2 planks at 1200mm 2 planks at 1000mm
Rows per pack	5
Pack Weight	21kg
Pack Dimensions	2200mm L x 160mm W x 100mm H

Plank Profile

SALVARE

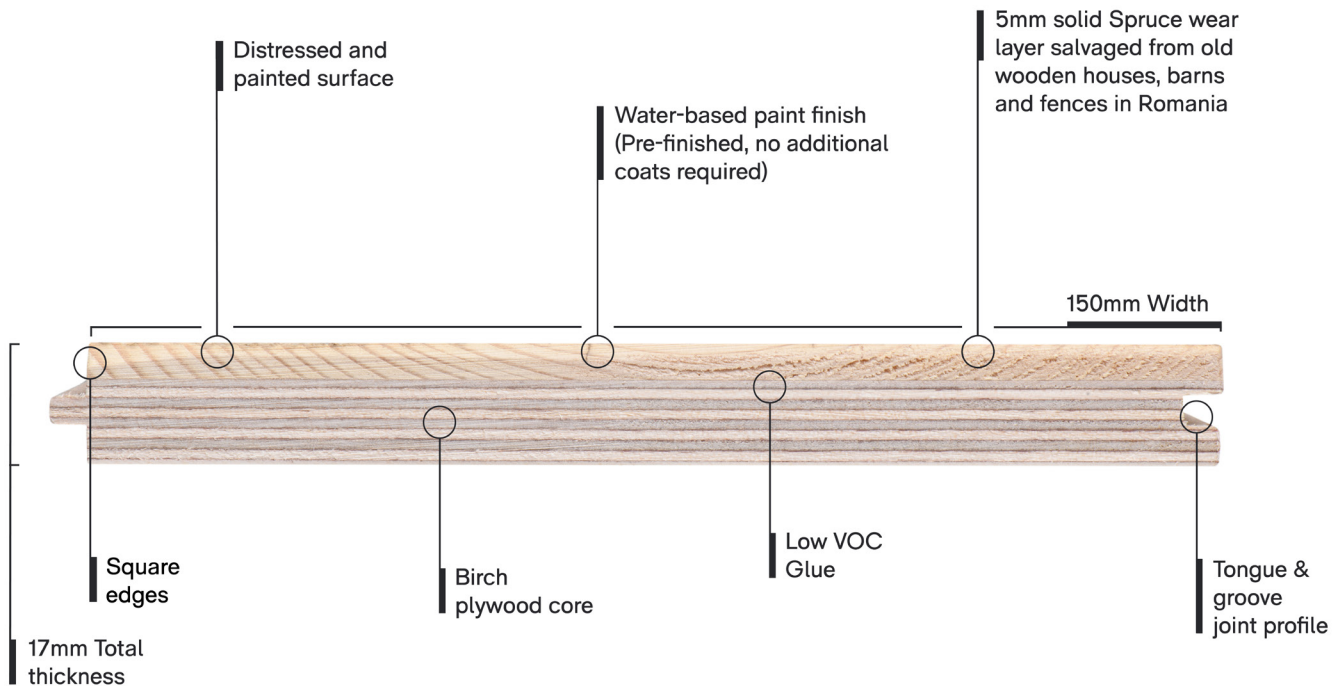

Structural Warranty

SALVARE 25 YEAR RESIDENTIAL STRUCTURAL WARRANTY

Salvare Engineered Panelling comes with a full 25 year Residential Structural Warranty. For full warranty terms and conditions, please visit www.forte.co.nz/warranties

SALVARE 5 YEAR COMMERCIAL STRUCTURAL WARRANTY

Salvare Engineered Panelling comes with a full 5 year Commercial Structural Warranty. For full warranty terms and conditions, please visit www.forte.co.nz/warranties

Installation

THE SALVARE COLLECTION MUST BE INSTALLED BY A TRAINED PROFESSIONAL

Please ensure that you have read and understood the Forté Wall and Ceiling Installation Guidelines before proceeding to install Salvare Panelling. If you have any questions or concerns, please call the Forté technical team on 0508 35 66 77. Failure to adhere to the Forté Wall and Ceiling Installation Guidelines may void your warranty.

For full installation guidelines, please visit www.forte.co.nz/installation



NATURAL SPRUCE PANELLING SPECIFICATION SHEET

Salvare Natural Spruce Engineered T&G panelling by Forté.
17mm thick, 150mm wide and 1000/1200/2200mm lengths.
Glue and pin installation method onto substrate. Unfinished.



Natural Spruce Panelling

PRODUCT DETAILS

Collection	Salvare
Product Name	Natural Spruce Panelling
Code	SA-NSP
Product Type	Engineered Panel
Availability	Stocked
Total Thickness	17mm (± 0.1mm)
Width	150mm
Length	1000/1200/2200mm
Wear Layer	5mm Solid Spruce
Core	Birch Plywood
Construction	2-layer Engineered
Surface Texture	Brushed
Bevel	Square Edge
Status	Unfinished (Can be custom coloured if required)
Species	Reclaimed Spruce
Crafted in	Europe

Salvare Natural Spruce Panelling is also available in:
7mm Lamella

STRUCTURAL WARRANTY

5 Year Commercial	For terms and conditions see
25 Year Residential	www.forte.co.nz/warranties

SUSTAINABILITY

Reclaimed Product

INSTALLATION

Installation Method	Glue and pin
Suitable Substrates	Plywood, plaster board or framing – enquire for others
Joint Profile	Tongue & Groove (4 sides)
Suitable Applications	Walls, Ceilings
Suitable Uses	Residential homes, hospitality, retail stores, restaurants, apartments
Wet Area Suitability	Contact the Forté team for information 0508 35 66 77

TECHNICAL SPECIFICATIONS


Reaction to Fire (Walls & Ceilings)	Group 1S can be achieved with intumescent coating
Wear Layer Density	103kg/m ³ / 0.4–0.7
<u>Formaldehyde Emission</u> AS/NZS 2098.11	E0 (0.08 mg/L)

PACK INFORMATION

Pack Size	1.65m ²
Pieces per pack	3 full planks at 2200mm 2 planks at 1200mm 2 planks at 1000mm
Rows per pack	5
Pack Weight	21kg
Pack Dimensions	2200mm L x 160mm W x 100mm H

Plank Profile

SALVARE

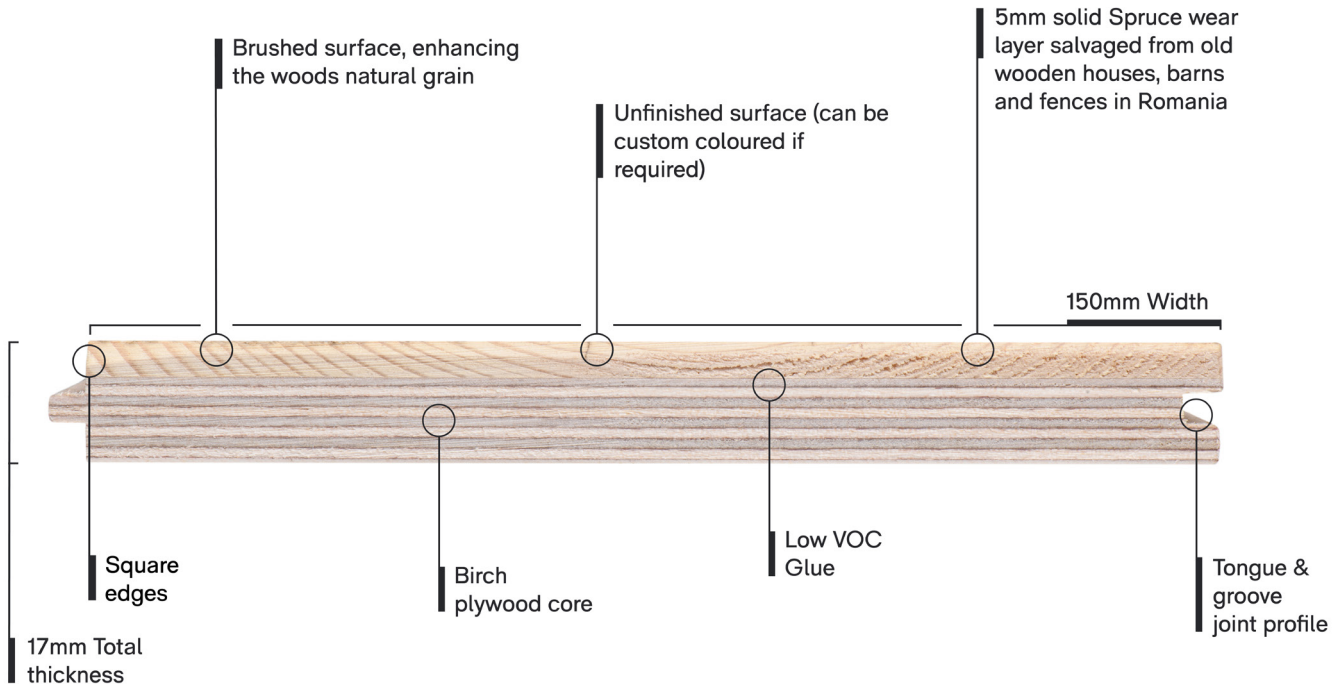

Structural Warranty

SALVARE 25 YEAR RESIDENTIAL STRUCTURAL WARRANTY

Salvare Engineered Panelling comes with a full 25 year Residential Structural Warranty. For full warranty terms and conditions, please visit www.forte.co.nz/warranties

SALVARE 5 YEAR COMMERCIAL STRUCTURAL WARRANTY

Salvare Engineered Panelling comes with a full 5 year Commercial Structural Warranty. For full warranty terms and conditions, please visit www.forte.co.nz/warranties

Installation

THE SALVARE COLLECTION MUST BE INSTALLED BY A TRAINED PROFESSIONAL

Please ensure that you have read and understood the Forté Wall and Ceiling Installation Guidelines before proceeding to install Salvare Panelling. If you have any questions or concerns, please call the Forté technical team on 0508 35 66 77. Failure to adhere to the Forté Wall and Ceiling Installation Guidelines may void your warranty.

For full installation guidelines, please visit www.forte.co.nz/installation



NATURAL SPRUCE LAMELLA SPECIFICATION SHEET

Salvare Natural Spruce Lamella by Forté. 7mm thick, mixed width and length. Glue and pin installation method onto substrate. Butt joint profile. Unfinished.



Natural Spruce Lamella

PRODUCT DETAILS

Collection	Salvare
Product Name	Natural Spruce Lamella
Code	SA-NSL
Product Type	Solid Lamella
Availability	Stocked
Total Thickness	7mm (± 0.1mm)
Width	100/140/180mm
Length	500-2200mm
Construction	7mm Solid Spruce
Surface Texture	Brushed
Bevel	Square Edge
Status	Unfinished (Can be custom coloured if required)
Species	Reclaimed Spruce
Crafted in	Europe

Salvare Natural Spruce Lamella is also available in:
17mm Engineered Panelling

SUSTAINABILITY

Reclaimed Product

INSTALLATION

Installation Method	Glue and pin
Suitable Substrates	Plywood or MDF Board – enquire for others
Joint Profile	Butt joint (4 sides)
Suitable Applications	Walls, Ceilings, Timber Joinery
Suitable Uses	Residential homes, hospitality, retail stores, restaurants, apartments
Wet Area Suitability	Contact the Forté team for information 0508 35 66 77

TECHNICAL SPECIFICATIONS


Reaction to Fire (Walls & Ceilings)	Group 1S can be achieved with intumescent coating
Timber Density	103kg/m ³ / 0.4–0.7
<u>Formaldehyde Emission</u> AS/NZS 2098.11	E0 (0.08 mg/L)

PACK INFORMATION

Pack Size	3.12m ²
Pieces per pack	Up to 11 planks (mixed lengths)
Pack Weight	10kg
Pack Dimensions	2200mm L x 300mm W x 40mm H

Lamella Profile

SALVARE

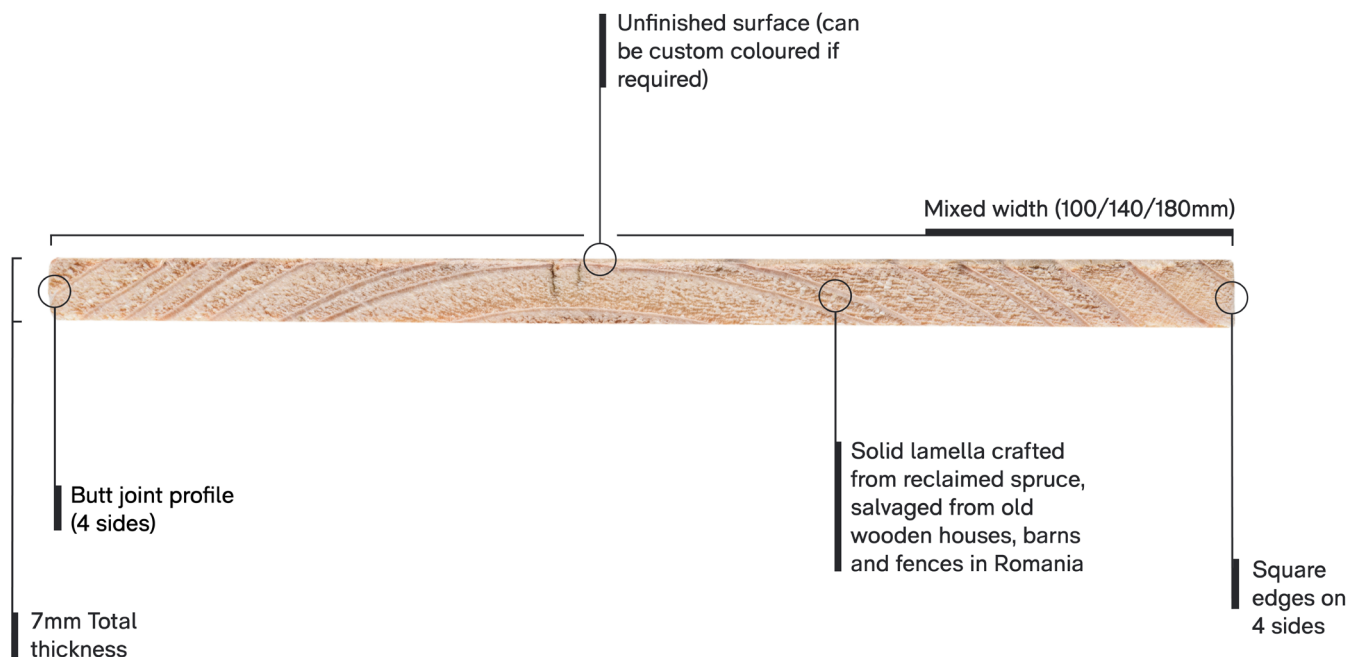

Installation

THE SALVARE COLLECTION MUST BE INSTALLED BY A TRAINED PROFESSIONAL

Please ensure that you have read and understood the Forté Wall and Ceiling Installation Guidelines before proceeding to install Salvare Panelling. If you have any questions or concerns, please call the Forté technical team on 0508 35 66 77. Failure to adhere to the Forté Wall and Ceiling Installation Guidelines may void your warranty.

For full installation guidelines, please visit www.forte.co.nz/installation