EUROSTYLE® PANELOK®

PROFILE SUMMARY - INTERLOCKING CLADDING AND SOFFIT

(All dimensions are nominal and in mm.)

Detail Number: RI-ESPWVC-000C

Date drawn: 25/02/2025

Scale: 1 : 5@ A4

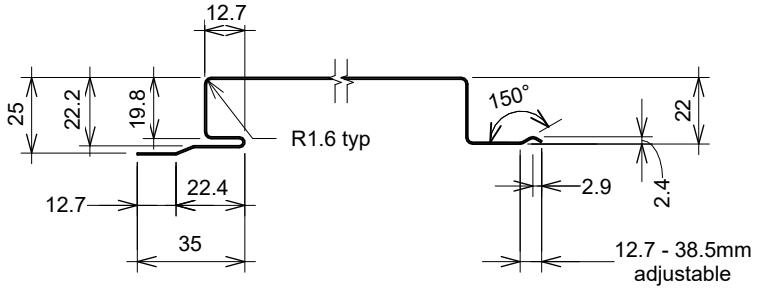

STANDARD WIDTH APPROX 250mm
Scale 1:2.5

PANELOK CLADDING AND SOFFIT

COIL SIZE	525mm	390mm	340mm
PAN WIDTH	400mm*	265mm*	215mm

Add 10mm to above pan size for effective cover (depending on recess width).
*Requires a 24mm packer.

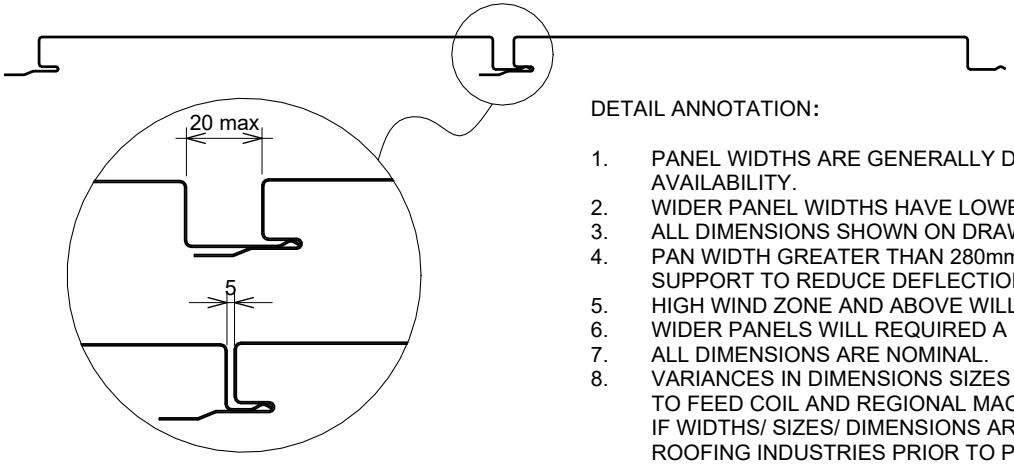

DETAIL ANNOTATION:

1. PANEL WIDTHS ARE GENERALLY DETERMINED BY COIL SIZE AVAILABILITY.
2. WIDER PANEL WIDTHS HAVE LOWER WIND LOADING CAPABILITIES.
3. ALL DIMENSIONS SHOWN ON DRAWINGS ARE NOMINAL +/- 5mm-
4. PAN WIDTH GREATER THAN 280mm WILL REQUIRE ADDITIONAL SUPPORT TO REDUCE DEFLECTION.
5. HIGH WIND ZONE AND ABOVE WILL REQUIRE A FIXING IN JOINT
6. WIDER PANELS WILL REQUIRED A FIXING IN JOINT.
7. ALL DIMENSIONS ARE NOMINAL.
8. VARIANCES IN DIMENSIONS SIZES AND WIDTHS CAN OCCUR DUE TO FEED COIL AND REGIONAL MACHINE VARIANCE.
   IF WIDTHS/ SIZES/ DIMENSIONS ARE CRITICAL, DISCUSS WITH ROOFING INDUSTRIES PRIOR TO PLACING ORDER.

GENERAL NOTES:

- These details to be read with Roofing Industries Eurostyle® panelok® Product Technical Statement and Installation Guide.
- The building designer is ultimately responsible to ensure that the details used meet the requirements of the NZ Building Code for the specific project.
- Details of the supporting structure (including cavity battens if used) are indicative only and are the responsibility of the building designer. For steel framed buildings thermal break cavity battens may be required.
- Roof/wall underlay selection are the responsibility of the designer. Underlay to be installed in accordance with underlay manufacturer's recommendations and requirements.
- These details are for Roofing Industries profile/s as nominated and may not be applicable to other profiles.
- This drawing is the copyright of 'Roofing Industries' and can only be copied or reproduced with their permission.
- Further information can be obtained from the NZ Metal Roof & Wall Cladding Code of Practice: www.metalroofing.org.nz or E2/AS1 where applicable.
- Details are for steel-based materials, other substrates may require some changes.
- All dimensions are nominal.
- Fixing: The designer needs to check the screw manufacturers technical data of the selected screw type for the design wind load and the material being fastened to.

Roofing Industries
roof.co.nz