

EUROSTYLE® PANELOK®

SHEET LIST

Detail Number: RI-ESPWVC-000A
Date drawn: 25/02/2025
Scale: @ A4

Residential Interlocking Cladding and Soffit Sheet List

Sheet Number	Type	Sheet Name
EUROSTYLE® PANELOK®		
RI-ESPWVC-000A	EUROSTYLE® PANELOK®	SHEET LIST
RI-ESPWVC-000B	EUROSTYLE® PANELOK®	PROFILES & ACCESSORIES
RI-ESPWVC-000C	EUROSTYLE® PANELOK®	PROFILE SUMMARY - INTERLOCKING CLADDING AND SOFFIT
RI-ESPWVC-010	EUROSTYLE® PANELOK® CLADDING	SOFFIT FLASHING FOR VERTICAL CLADDING ON CAVITY
RI-ESPWVC-010A	EUROSTYLE® PANELOK® CLADDING	BARGE CAP DETAIL FOR VERTICAL CLADDING ON CAVITY
RI-ESPWVC-030A	EUROSTYLE® PANELOK® CLADDING	WALL CLADDING EXTERNAL VERTICAL CORNER ON CAVITY
RI-ESPWVC-040A	EUROSTYLE® PANELOK® CLADDING	WALL CLADDING INTERNAL VERTICAL CORNER ON CAVITY
RI-ESPWVC-050	EUROSTYLE® PANELOK® CLADDING	WALL CLADDING BASE OF VERTICAL CLADDING ON CAVITY
RI-ESPWVC-130A	EUROSTYLE® PANELOK® CLADDING	WINDOW / DOOR HEAD FLASHING FOR VERTICAL CLADDING ON CAVITY - WINDOW ON CAVITY LINE
RI-ESPWVC-130B	EUROSTYLE® PANELOK® CLADDING	WINDOW / DOOR JAMB FLASHING FOR VERTICAL CLADDING ON CAVITY - WINDOW ON CAVITY LINE OPTION 1
RI-ESPWVC-130B-1	EUROSTYLE® PANELOK® CLADDING	WINDOW / DOOR JAMB FLASHING FOR VERTICAL CLADDING ON CAVITY - WINDOW ON CAVITY LINE OPTION 2
RI-ESPWVC-130C	EUROSTYLE® PANELOK® CLADDING	WINDOW / DOOR SILL FLASHING FOR VERTICAL CLADDING ON CAVITY - WINDOW ON CAVITY LINE
RI-ESPWVC-140A	EUROSTYLE® PANELOK® CLADDING	WINDOW / DOOR HEAD FLASHING FOR VERTICAL CLADDING ON CAVITY - WINDOW ON CLADDING LINE
RI-ESPWVC-140B	EUROSTYLE® PANELOK® CLADDING	WINDOW / DOOR JAMB FLASHING FOR VERTICAL CLADDING - WINDOW ON CLADDING LINE
RI-ESPWVC-140C	EUROSTYLE® PANELOK® CLADDING	SILL FLASHING FOR VERTICAL CLADDING ON CAVITY (WINDOW/DOOR ON CLADDING LINE)
RI-ESPWVC-160	EUROSTYLE® PANELOK® CLADDING	WALL PIPE PENETRATION
RI-ESPWVC-170	EUROSTYLE® PANELOK® CLADDING	TRANSVERSE JUNCTION FOR VERTICAL CLADDING ON CAVITY
RI-ESPWVC-180	EUROSTYLE® PANELOK® CLADDING	SHEET PACKER OPTIONS

Copyright detail © 2025




EUROSTYLE® PANELOK® PROFILES & ACCESSORIES

Detail Number: RI-ESPWVC-000B
Date drawn: 25/02/2025
Scale: 1 : 5@ A4


ROOFING INDUSTRIES EUROSTYLE® PANELOK®
CLADDING AND SOFFIT SECRET CLIP FIXED




ROOFING INDUSTRIES
UNDERFLASHING




ROOFING INDUSTRIES
ANGLE FLASHING




ROOFING INDUSTRIES EUROSTYLE® PANELOK®
CLADDING AND SOFFIT SECRET CLIP FIXED




HEAD FLASHING
(WINDOW ON CAVITY)




SILL FLASHING
(WINDOW ON CAVITY)



JAMB FLASHING
(WINDOW ON CAVITY)




FIXINGS



HEAD FLASHING
(WINDOW OUTSIDE CLADDING)




SILL FLASHING
(WINDOW OUTSIDE CLADDING)




JAMB FLASHING
(WINDOW OUTSIDE CLADDING)



ROOFING INDUSTRIES SNAPLOK
EXTERNAL CORNER



ROOFING INDUSTRIES
INTERLOCKING
CLADDING AND SOFFIT
INTERNAL CORNER



METAL ANGLE



Copyright detail © 2025



EUROSTYLE® PANELOK®

PROFILE SUMMARY - INTERLOCKING CLADDING AND SOFFIT

(All dimensions are nominal and in mm.)

Detail Number: RI-ESPWVC-000C



Date drawn: 25/02/2025

Scale: 1 : 5@ A4

PANELOK CLADDING AND SOFFIT

COIL SIZE	525mm	390mm	340mm
PAN WIDTH	400mm*	265mm*	215mm

Add 10mm to above pan size for effective cover (depending on recess width).
*Requires a 24mm packer.

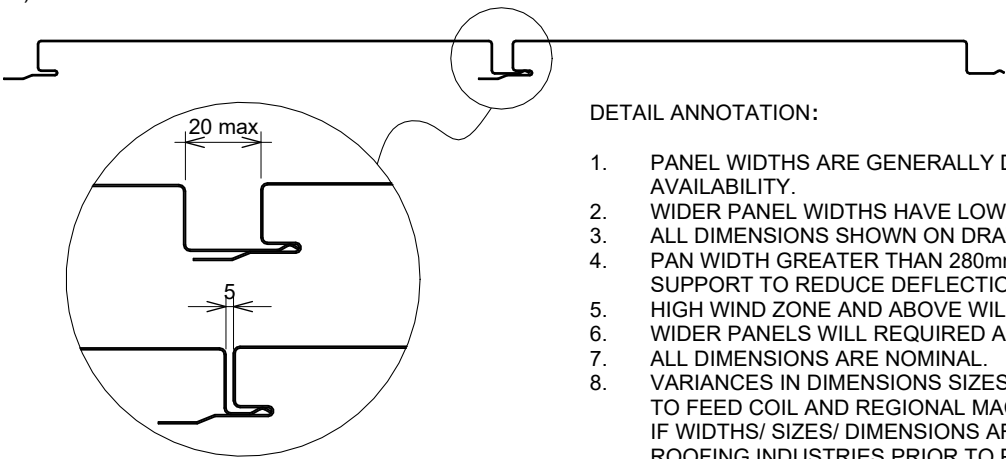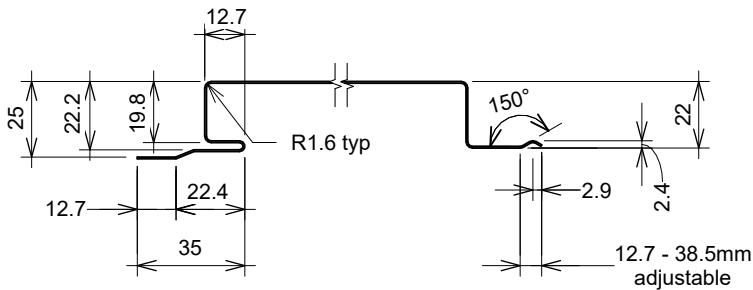

DETAIL ANNOTATION:

1. PANEL WIDTHS ARE GENERALLY DETERMINED BY COIL SIZE AVAILABILITY.
2. WIDER PANEL WIDTHS HAVE LOWER WIND LOADING CAPABILITIES.
3. ALL DIMENSIONS SHOWN ON DRAWINGS ARE NOMINAL +/- 5mm-
4. PAN WIDTH GREATER THAN 280mm WILL REQUIRE ADDITIONAL SUPPORT TO REDUCE DEFLECTION.
5. HIGH WIND ZONE AND ABOVE WILL REQUIRE A FIXING IN JOINT
6. WIDER PANELS WILL REQUIRED A FIXING IN JOINT.
7. ALL DIMENSIONS ARE NOMINAL.
8. VARIANCES IN DIMENSIONS SIZES AND WIDTHS CAN OCCUR DUE TO FEED COIL AND REGIONAL MACHINE VARIANCE. IF WIDTHS/ SIZES/ DIMENSIONS ARE CRITICAL, DISCUSS WITH ROOFING INDUSTRIES PRIOR TO PLACING ORDER.

GENERAL NOTES:

- These details to be read with Roofing Industries Eurostyle® panelok® Product Technical Statement and Installation Guide.
- The building designer is ultimately responsible to ensure that the details used meet the requirements of the NZ Building Code for the specific project.
- Details of the supporting structure (including cavity battens if used) are indicative only and are the responsibility of the building designer. For steel framed buildings thermal break cavity battens may be required.
- Roof/wall underlay selection are the responsibility of the designer. Underlay to be installed in accordance with underlay manufacturer's recommendations and requirements.
- These details are for Roofing Industries profile/s as nominated and may not be applicable to other profiles.
- This drawing is the copyright of 'Roofing Industries' and can only be copied or reproduced with their permission.
- Further information can be obtained from the NZ Metal Roof & Wall Cladding Code of Practice: www.metalroofing.org.nz or E2/AS1 where applicable.
- Details are for steel-based materials, other substrates may require some changes.
- All dimensions are nominal.
- Fixing: The designer needs to check the screw manufacturers technical data of the selected screw type for the design wind load and the material being fastened to.

Copyright detail © 2025




EUROSTYLE® PANELOK® CLADDING

SOFFIT FLASHING FOR VERTICAL CLADDING ON CAVITY

Detail Number: RI-ESPWVC-010

Date drawn: 25/02/2025

Scale: 1 : 5@ A4

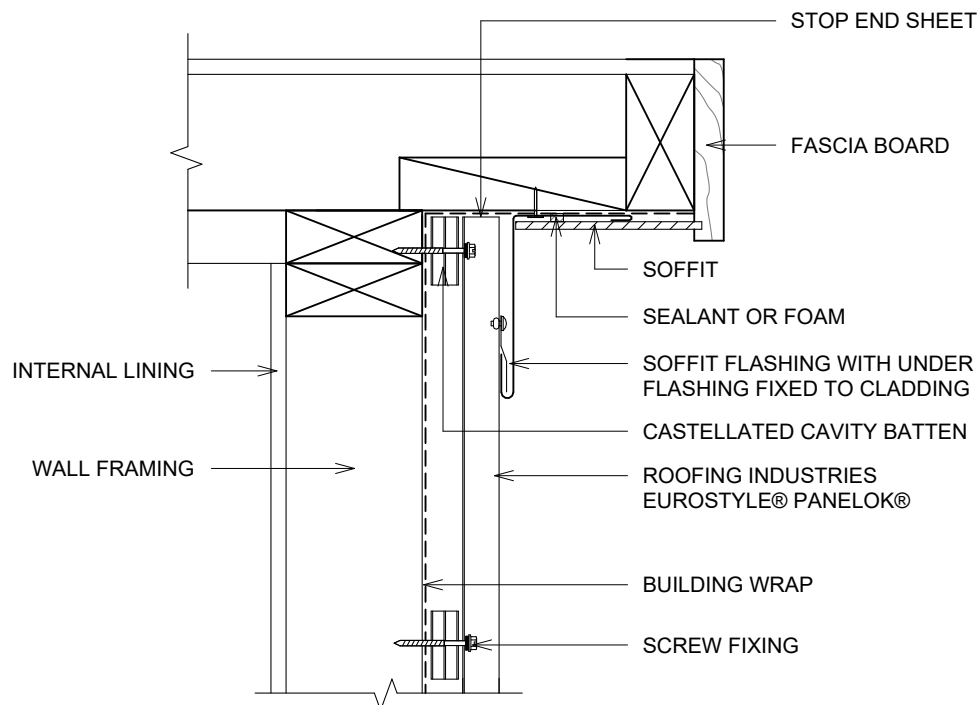

DETAIL ANNOTATION:

1. HIGH TO EXTRA HIGH WIND ZONE DOUBLE FIX UNDERFLASHINGS.
2. TREATED TIMBER CAVITY BATTENS CONTAINING CORROSIVE TREATMENTS MUST BE SEPARATED FROM METAL CLADDING.
3. CASTELLATED BATTEN OR APPROVED DRAINED BATTEN CAN BE USED WITH THIS SYSTEM.
4. FOR FIXING METHODS REFER TO PANELOK PRODUCT TECHNICAL STATEMENT AND INSTALLATION GUIDE.
5. CLOSE OFF ANY ROOF VENTILATION TO WALL CAVITY.
6. FASTENERS TO BE COMPATIBLE WITH MATERIAL BEING FIXED AND THE SUITABLE GRADE FOR THE ENVIRONMENT IN WHICH LOCATED

GENERAL NOTES:

- These details to be read with Roofing Industries Eurostyle® panelok® Product Technical Statement and Installation Guide.
- The building designer is ultimately responsible to ensure that the details used meet the requirements of the NZ Building Code for the specific project.
- Details of the supporting structure (including cavity battens if used) are indicative only and are the responsibility of the building designer. For steel framed buildings thermal break cavity battens may be required.
- Roof/wall underlay selection are the responsibility of the designer. Underlay to be installed in accordance with underlay manufacturer's recommendations and requirements.
- These details are for Roofing Industries profile/s as nominated and may not be applicable to other profiles.
- This drawing is the copyright of 'Roofing Industries' and can only be copied or reproduced with their permission.
- Further information can be obtained from the NZ Metal Roof & Wall Cladding Code of Practice: www.metalroofing.org.nz or E2/AS1 where applicable.
- Details are for steel-based materials, other substrates may require some changes.
- All dimensions are nominal.
- Fixing: The designer needs to check the screw manufacturers technical data of the selected screw type for the design wind load and the material being fastened to.

Copyright detail © 2025




EUROSTYLE® PANELOK® CLADDING

BARGE CAP DETAIL FOR VERTICAL CLADDING ON CAVITY

Detail Number: RI-ESPWVC-010A


Date drawn: 25/02/2025

Scale: 1 : 5@ A4

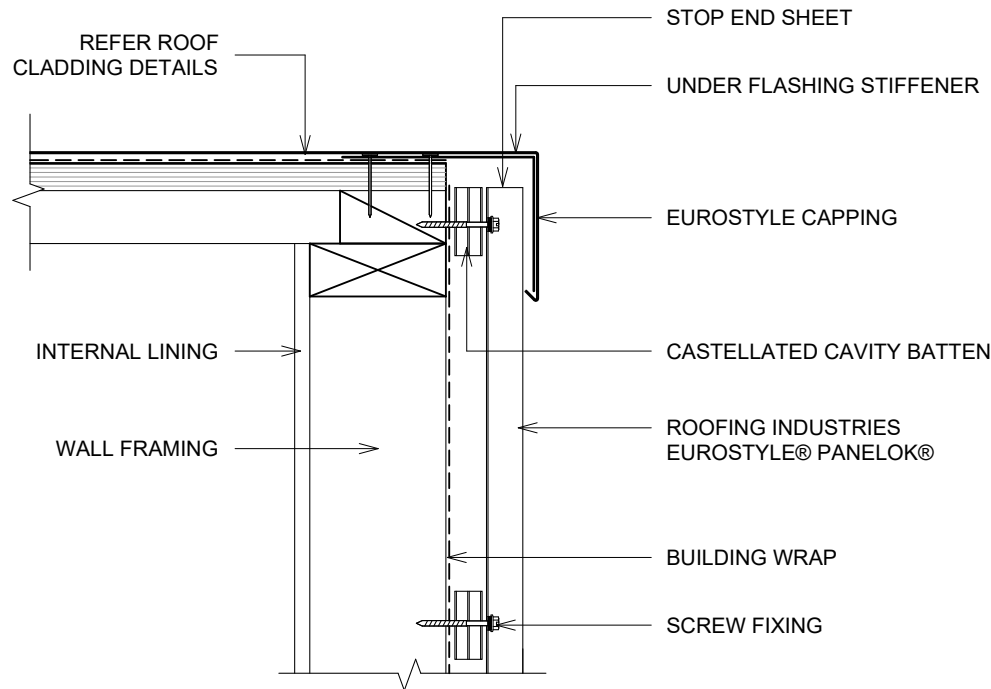

DETAIL ANNOTATION:

1. HIGH TO EXTRA HIGH WIND ZONE DOUBLE FIX UNDERFLASHINGS.
2. TREATED TIMBER CAVITY BATTENS CONTAINING CORROSIVE TREATMENTS MUST BE SEPARATED FROM METAL CLADDING.
3. CASTELLATED BATTEN OR APPROVED DRAINED BATTEN CAN BE USED WITH THIS SYSTEM.
4. FOR FIXING METHODS REFER TO PANELOK PRODUCT TECHNICAL STATEMENT AND INSTALLATION GUIDE.
5. CLOSE OFF ANY ROOF VENTILATION TO WALL CAVITY.
6. FASTENERS TO BE COMPATIBLE WITH MATERIAL BEING FIXED AND THE SUITABLE GRADE FOR THE ENVIRONMENT IN WHICH LOCATED

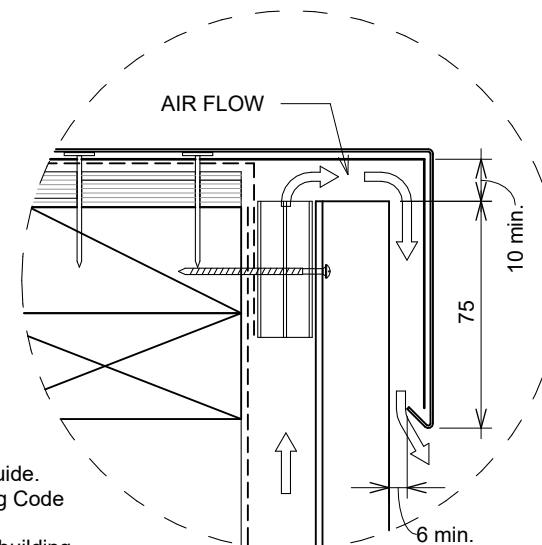

GENERAL NOTES:

- These details to be read with Roofing Industries Eurostyle® panelok® Product Technical Statement and Installation Guide.
- The building designer is ultimately responsible to ensure that the details used meet the requirements of the NZ Building Code for the specific project.
- Details of the supporting structure (including cavity battens if used) are indicative only and are the responsibility of the building designer. For steel framed buildings thermal break cavity battens may be required.
- Roof/wall underlay selection are the responsibility of the designer. Underlay to be installed in accordance with underlay manufacturer's recommendations and requirements.
- These details are for Roofing Industries profile/s as nominated and may not be applicable to other profiles.
- This drawing is the copyright of 'Roofing Industries' and can only be copied or reproduced with their permission.
- Further information can be obtained from the NZ Metal Roof & Wall Cladding Code of Practice: www.metalroofing.org.nz or E2/AS1 where applicable.
- Details are for steel-based materials, other substrates may require some changes.
- All dimensions are nominal.
- Fixing: The designer needs to check the screw manufacturers technical data of the selected screw type for the design wind load and the material being fastened to.

Copyright detail © 2025




EUROSTYLE® PANELOK® CLADDING

WALL CLADDING EXTERNAL VERTICAL CORNER ON CAVITY

Detail Number: RI-ESPWVC-030A

Date drawn: 25/02/2025

Scale: 1 : 5@ A4

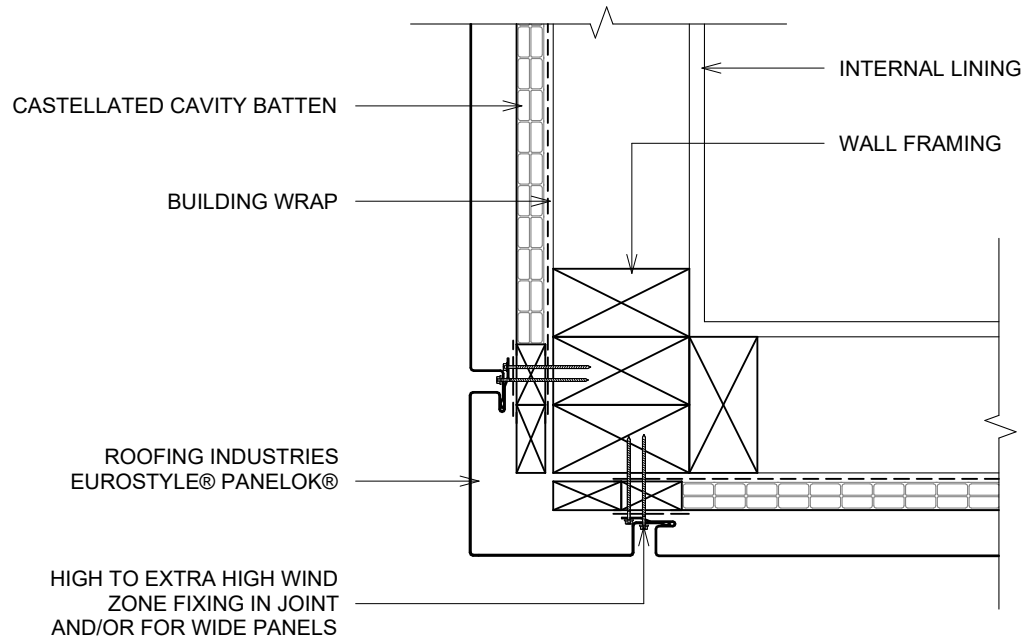

DETAIL ANNOTATION:

1. TREATED TIMBER CAVITY BATTENS CONTAINING CORROSIVE TREATMENTS MUST BE SEPARATED FROM METAL CLADDING.
2. CASTELLATED BATTEN OR APPROVED DRAINED BATTEN CAN BE USED WITH THIS SYSTEM.
3. FASTENERS TO BE COMPATIBLE WITH MATERIAL BEING FIXED AND THE SUITABLE GRADE FOR THE ENVIRONMENT IN WHICH LOCATED.
4. FOR FIXING METHODS REFER TO PANELOK PRODUCT TECHNICAL STATEMENT AND INSTALLATION GUIDE.

GENERAL NOTES:

- These details to be read with Roofing Industries Eurostyle® panelok® Product Technical Statement and Installation Guide.
- The building designer is ultimately responsible to ensure that the details used meet the requirements of the NZ Building Code for the specific project.
- Details of the supporting structure (including cavity battens if used) are indicative only and are the responsibility of the building designer. For steel framed buildings thermal break cavity battens may be required.
- Roof/wall underlay selection are the responsibility of the designer. Underlay to be installed in accordance with underlay manufacturer's recommendations and requirements.
- These details are for Roofing Industries profile/s as nominated and may not be applicable to other profiles.
- This drawing is the copyright of 'Roofing Industries' and can only be copied or reproduced with their permission.
- Further information can be obtained from the NZ Metal Roof & Wall Cladding Code of Practice: www.metalroofing.org.nz or E2/AS1 where applicable.
- Details are for steel-based materials, other substrates may require some changes.
- All dimensions are nominal.
- Fixing: The designer needs to check the screw manufacturers technical data of the selected screw type for the design wind load and the material being fastened to.

Copyright detail © 2025




EUROSTYLE® PANELOK® CLADDING

WALL CLADDING INTERNAL VERTICAL CORNER ON CAVITY

Detail Number: RI-ESPWVC-040A

Date drawn: 25/02/2025

Scale: 1 : 5@ A4

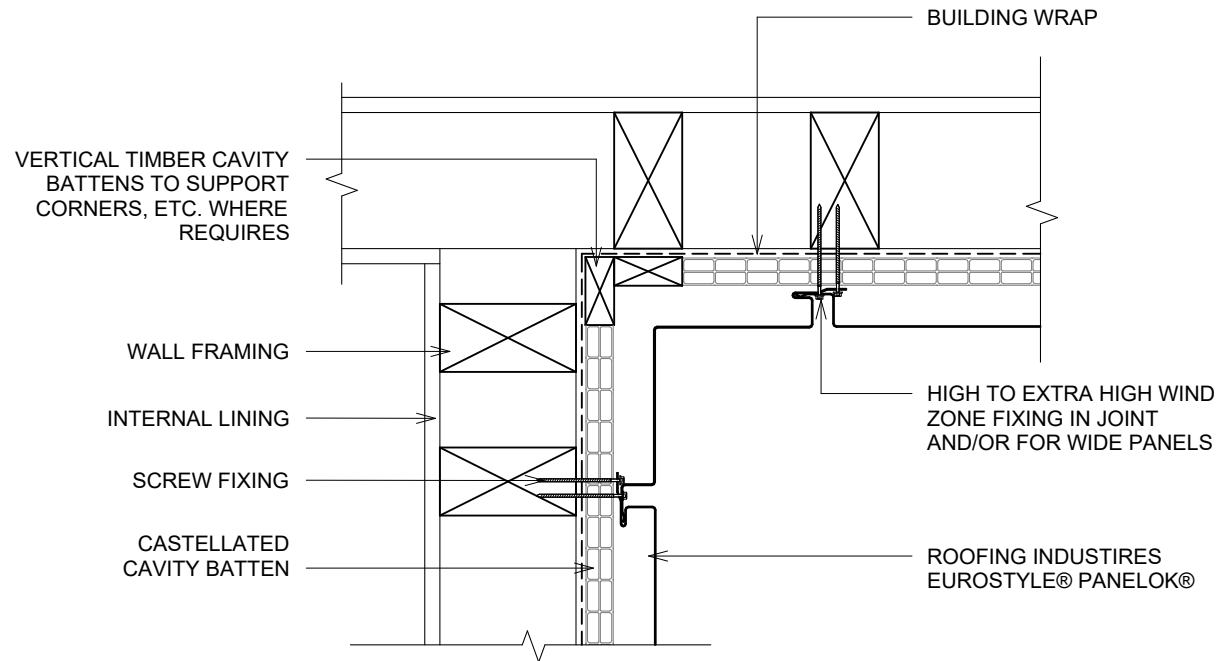

DETAIL ANNOTATION:

1. HIGH TO EXTRA HIGH WIND ZONE DOUBLE FIX UNDERFLASHINGS.
2. TREATED TIMBER CAVITY BATTENS CONTAINING CORROSIVE TREATMENTS MUST BE SEPARATED FROM METAL CLADDING.
3. CASTELLATED BATTEN OR APPROVED DRAINED BATTEN CAN BE USED WITH THIS SYSTEM.
4. FOR FIXING METHODS REFER TO PANELOK PRODUCT TECHNICAL STATEMENT AND INSTALLATION GUIDE.
5. CLOSE OFF ANY ROOF VENTILATION TO WALL CAVITY.
6. FASTENERS TO BE COMPATIBLE WITH MATERIAL BEING FIXED AND THE SUITABLE GRADE FOR THE ENVIRONMENT IN WHICH LOCATED

GENERAL NOTES:

- These details to be read with Roofing Industries Eurostyle® panelok® Product Technical Statement and Installation Guide.
- The building designer is ultimately responsible to ensure that the details used meet the requirements of the NZ Building Code for the specific project.
- Details of the supporting structure (including cavity battens if used) are indicative only and are the responsibility of the building designer. For steel framed buildings thermal break cavity battens may be required.
- Roof/wall underlay selection are the responsibility of the designer. Underlay to be installed in accordance with underlay manufacturer's recommendations and requirements.
- These details are for Roofing Industries profile/s as nominated and may not be applicable to other profiles.
- This drawing is the copyright of 'Roofing Industries' and can only be copied or reproduced with their permission.
- Further information can be obtained from the NZ Metal Roof & Wall Cladding Code of Practice: www.metalroofing.org.nz or E2/AS1 where applicable.
- Details are for steel-based materials, other substrates may require some changes.
- All dimensions are nominal.
- Fixing: The designer needs to check the screw manufacturers technical data of the selected screw type for the design wind load and the material being fastened to.

Copyright detail © 2025




EUROSTYLE® PANELOK® CLADDING

WALL CLADDING BASE OF VERTICAL CLADDING ON CAVITY

Detail Number: RI-ESPWVC-050

Date drawn: 25/02/2025

Scale: 1 : 5@ A4

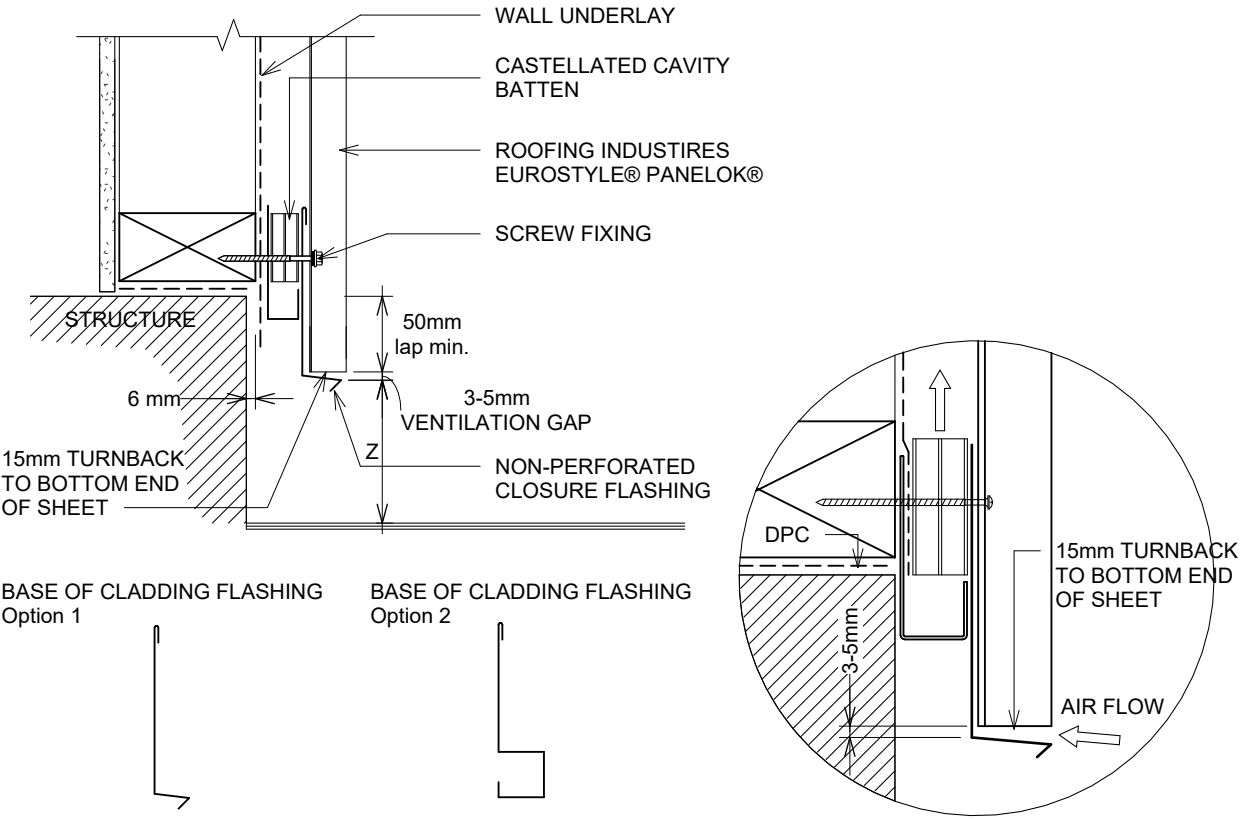

DETAIL ANNOTATION:

1. HIGH TO EXTRA HIGH WIND ZONE DOUBLE FIX UNDERFLASHINGS.
2. TREATED TIMBER CAVITY BATTENS CONTAINING CORROSIVE TREATMENTS MUST BE SEPARATED FROM METAL CLADDING.
3. CASTELLATED BATTEN OR APPROVED DRAINED BATTEN CAN BE USED WITH THIS SYSTEM.
4. FOR FIXING METHODS REFER TO PANELOK PRODUCT TECHNICAL STATEMENT AND INSTALLATION GUIDE.
5. CLOSE OFF ANY ROOF VENTILATION TO WALL CAVITY.
6. FASTENERS TO BE COMPATIBLE WITH MATERIAL BEING FIXED AND THE SUITABLE GRADE FOR THE ENVIRONMENT IN WHICH LOCATED

SET DOWN	MINIMUM
	Z
PAVED SURFACE	100mm
UNPAVED SURFACE	175mm

GENERAL NOTES:

- These details to be read with Roofing Industries Eurostyle® panelok® Product Technical Statement and Installation Guide.
- The building designer is ultimately responsible to ensure that the details used meet the requirements of the NZ Building Code for the specific project.
- Details of the supporting structure (including cavity battens if used) are indicative only and are the responsibility of the building designer. For steel framed buildings thermal break cavity battens may be required.
- Roof/wall underlay selection are the responsibility of the designer. Underlay to be installed in accordance with underlay manufacturer's recommendations and requirements.
- These details are for Roofing Industries profile/s as nominated and may not be applicable to other profiles.
- This drawing is the copyright of 'Roofing Industries' and can only be copied or reproduced with their permission.
- Further information can be obtained from the NZ Metal Roof & Wall Cladding Code of Practice: www.metalroofing.org.nz or E2/AS1 where applicable.
- Details are for steel-based materials, other substrates may require some changes.
- All dimensions are nominal.
- Fixing: The designer needs to check the screw manufacturers technical data of the selected screw type for the design wind load and the material being fastened to.

Copyright detail © 2025




EUROSTYLE® PANELOK® CLADDING

WINDOW / DOOR HEAD FLASHING FOR VERTICAL CLADDING ON CAVITY - WINDOW ON CAVITY LINE

Detail Number: RI-ESPWVC-130A

Date drawn: 25/02/2025

Scale: 1 : 5@ A4

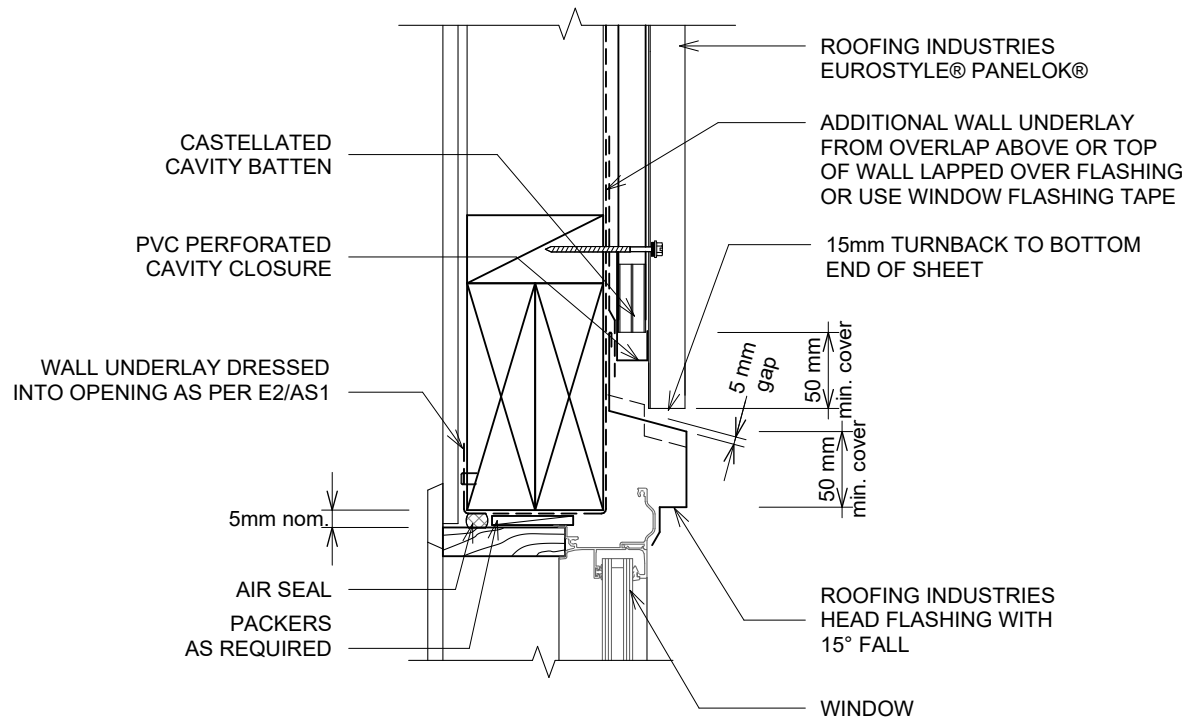


DETAIL ANNOTATION:

1. REFER TO E2/AS1 FOR GENERAL WINDOW OPENING FOR WRAPPING OF FRAMED OPENING PRIOR TO WINDOW INSTALLATION.
2. ARCHITRAVE'S ARE SHOWN FOR CONSISTENCY ONLY, DETAIL MAY BE USED WITH REBATED LINER.
3. JOINERY AND JOINERY FLASHING INTERFACE IS INDICATIVE ONLY. REFER TO SELECTED JOINERY MANUFACTURER'S RECOMMENDATIONS AND DETAILS.
4. FOR FIXING METHODS REFER TO PANELOK PRODUCT TECHNICAL STATEMENT AND INSTALLATION GUIDE.
5. SEAL HEAD FLASHING TO WINDOW IN VERY HIGH & EXTRA HIGH WIND ZONES.
6. CASTELLATED TIMBER BATTEN OR APPROVED DRAINED BATTEN MAY BE USED WITH THIS SYSTEM.
7. TREATED TIMBER CAVITY BATTENS CONTAINING CORROSIVE TREATMENTS MUST BE SEPARATED FROM METAL CLADDING.
8. CLOSE OFF ANY ROOF VENTILATION TO WALL CAVITY.
9. FASTENERS TO BE COMPATIBLE WITH MATERIAL BEING FIXED AND THE SUITABLE GRADE FOR THE ENVIRONMENT IN WHICH LOCATED
10. LIAISE WITH WINDOW MANUFACTURER PRIOR TO INSTALLATION.

GENERAL NOTES:

- These details to be read with Roofing Industries Eurostyle® panelok® Product Technical Statement and Installation Guide.
- The building designer is ultimately responsible to ensure that the details used meet the requirements of the NZ Building Code for the specific project.
- Details of the supporting structure (including cavity battens if used) are indicative only and are the responsibility of the building designer. For steel framed buildings thermal break cavity battens may be required.
- Roof/wall underlay selection are the responsibility of the designer. Underlay to be installed in accordance with underlay manufacturer's recommendations and requirements.
- These details are for Roofing Industries profile/s as nominated and may not be applicable to other profiles.
- This drawing is the copyright of 'Roofing Industries' and can only be copied or reproduced with their permission.
- Further information can be obtained from the NZ Metal Roof & Wall Cladding Code of Practice: www.metalroofing.org.nz or E2/AS1 where applicable.
- Details are for steel-based materials, other substrates may require some changes.
- All dimensions are nominal.
- Fixing: The designer needs to check the screw manufacturers technical data of the selected screw type for the design wind load and the material being fastened to.

HEAD FLASHING



(Dimensions are indicative only) Turn down end of head flashing to jamb flashing

Copyright detail © 2025




EUROSTYLE® PANELOK® CLADDING

WINDOW / DOOR JAMB FLASHING FOR VERTICAL CLADDING ON CAVITY - WINDOW ON CAVITY LINE OPTION 1

Detail Number: RI-ESPWVC-130B


Date drawn: 25/02/2025

Scale: 1 : 5@ A4

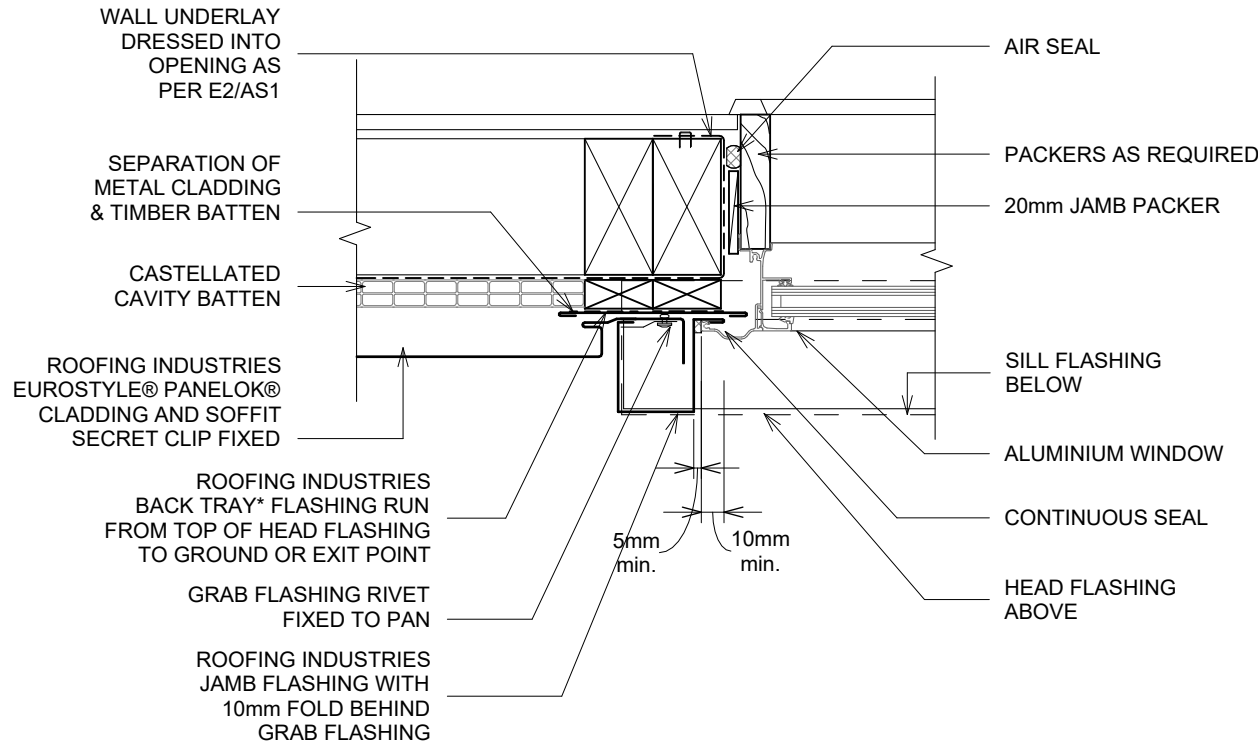

DETAIL ANNOTATION:

1. REFER TO E2/AS1 FOR GENERAL WINDOW OPENING FOR WRAPPING OF FRAMED OPENING PRIOR TO WINDOW INSTALLATION.
2. ARCHITRAVE'S ARE SHOWN FOR CONSISTENCY ONLY, DETAIL MAY BE USED WITH REBATED LINER.
3. JOINERY AND JOINERY FLASHING INTERFACE IS INDICATIVE ONLY. REFER TO SELECTED JOINERY MANUFACTURER'S RECOMMENDATIONS AND DETAILS.
4. FOR FIXING METHODS REFER TO PANELOK PRODUCT TECHNICAL STATEMENT AND INSTALLATION GUIDE.
5. ALLOW FOR SEPARATION FROM ANY CORROSIVE TIMBER TREATMENTS.
6. CASTELLATED TIMBER BATTEN OR APPROVED DRAINED BATTEN MAY BE USED WITH THIS SYSTEM.
7. TREATED TIMBER CAVITY BATTENS CONTAINING CORROSIVE TREATMENTS MUST BE SEPARATED FROM METAL CLADDING.
8. CLOSE OFF ANY ROOF VENTILATION TO WALL CAVITY.
9. FASTENERS TO BE COMPATIBLE WITH MATERIAL BEING FIXED AND THE SUITABLE GRADE FOR THE ENVIRONMENT IN WHICH LOCATED.
10. LIAISE WITH WINDOW MANUFACTURER PRIOR TO INSTALLATION.



GENERAL NOTES:

- These details to be read with Roofing Industries Eurostyle® panelok® Product Technical Statement and Installation Guide.
- The building designer is ultimately responsible to ensure that the details used meet the requirements of the NZ Building Code for the specific project.
- Details of the supporting structure (including cavity battens if used) are indicative only and are the responsibility of the building designer. For steel framed buildings thermal break cavity battens may be required.
- Roof/wall underlay selection are the responsibility of the designer. Underlay to be installed in accordance with underlay manufacturer's recommendations and requirements.
- These details are for Roofing Industries profile/s as nominated and may not be applicable to other profiles.
- This drawing is the copyright of 'Roofing Industries' and can only be copied or reproduced with their permission.
- Further information can be obtained from the NZ Metal Roof & Wall Cladding Code of Practice: www.metalroofing.org.nz or E2/AS1 where applicable.
- Details are for steel-based materials, other substrates may require some changes.
- All dimensions are nominal.
- Fixing: The designer needs to check the screw manufacturers technical data of the selected screw type for the design wind load and the material being fastened to.

Copyright detail © 2025

- * Back tray size may require to increase to ensure coverage at ends of head flashings. Back Tray to run from top of head flashing to ground or exit point.
- * (Dimensions are indicative only)
- * Turn down end of head flashing




EUROSTYLE® PANELOK® CLADDING

WINDOW / DOOR JAMB FLASHING FOR VERTICAL CLADDING ON CAVITY - WINDOW ON CAVITY LINE OPTION 2

Detail Number: RI-ESPWVC-130B-1

Date drawn: 25/02/2025

Scale: 1 : 5@ A4

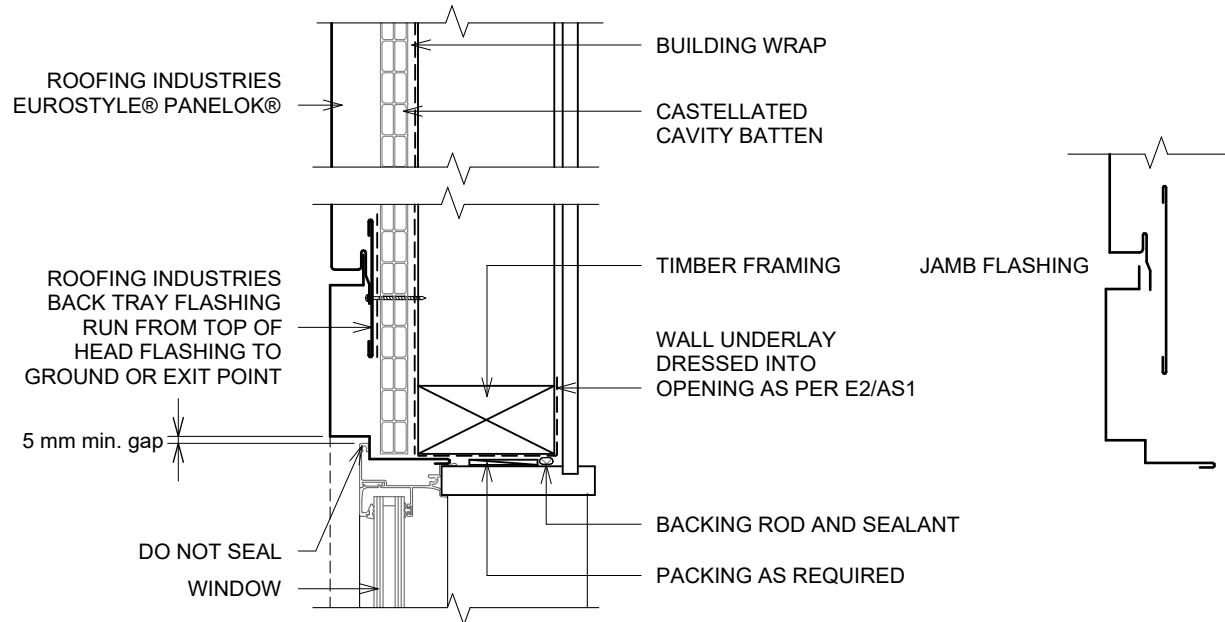

DETAIL ANNOTATION:

1. REFER TO E2/AS1 FOR GENERAL WINDOW OPENING FOR WRAPPING OF FRAMED OPENING PRIOR TO WINDOW INSTALLATION.
2. ARCHITRAVE'S ARE SHOWN FOR CONSISTENCY ONLY, DETAIL MAY BE USED WITH REBATED LINER.
3. JOINERY AND JOINERY FLASHING INTERFACE IS INDICATIVE ONLY. REFER TO SELECTED JOINERY MANUFACTURER'S RECOMMENDATIONS AND DETAILS.
4. FOR FIXING METHODS REFER TO PANELOK PRODUCT TECHNICAL STATEMENT AND INSTALLATION GUIDE.
5. ALLOW FOR SEPARATION FROM ANY CORROSIVE TIMBER TREATMENTS.
6. CASTELLATED TIMBER BATTEN OR APPROVED DRAINED BATTEN MAY BE USED WITH THIS SYSTEM.
7. TREATED TIMBER CAVITY BATTENS CONTAINING CORROSIVE TREATMENTS MUST BE SEPARATED FROM METAL CLADDING. CLOSE OFF ANY ROOF VENTILATION TO WALL CAVITY.
8. FASTENERS TO BE COMPATIBLE WITH MATERIAL BEING FIXED AND THE SUITABLE GRADE FOR THE ENVIRONMENT IN WHICH LOCATED.
9. LIAISE WITH WINDOW MANUFACTURER PRIOR TO INSTALLATION.

GENERAL NOTES:

- These details to be read with Roofing Industries Eurostyle® panelok® Product Technical Statement and Installation Guide.
- The building designer is ultimately responsible to ensure that the details used meet the requirements of the NZ Building Code for the specific project.
- Details of the supporting structure (including cavity battens if used) are indicative only and are the responsibility of the building designer. For steel framed buildings thermal break cavity battens may be required.
- Roof/wall underlay selection are the responsibility of the designer. Underlay to be installed in accordance with underlay manufacturer's recommendations and requirements.
- These details are for Roofing Industries profile/s as nominated and may not be applicable to other profiles.
- This drawing is the copyright of 'Roofing Industries' and can only be copied or reproduced with their permission.
- Further information can be obtained from the NZ Metal Roof & Wall Cladding Code of Practice: www.metalroofing.org.nz or E2/AS1 where applicable.
- Details are for steel-based materials, other substrates may require some changes.
- All dimensions are nominal.
- Fixing: The designer needs to check the screw manufacturers technical data of the selected screw type for the design wind load and the material being fastened to.

Copyright detail © 2025



EUROSTYLE® PANELOK® CLADDING


WINDOW / DOOR SILL FLASHING FOR VERTICAL CLADDING

ON CAVITY - WINDOW ON CAVITY LINE

Detail Number: RI-ESPWVC-130C

Date drawn: 25/02/2025

Scale: 1 : 5@ A4

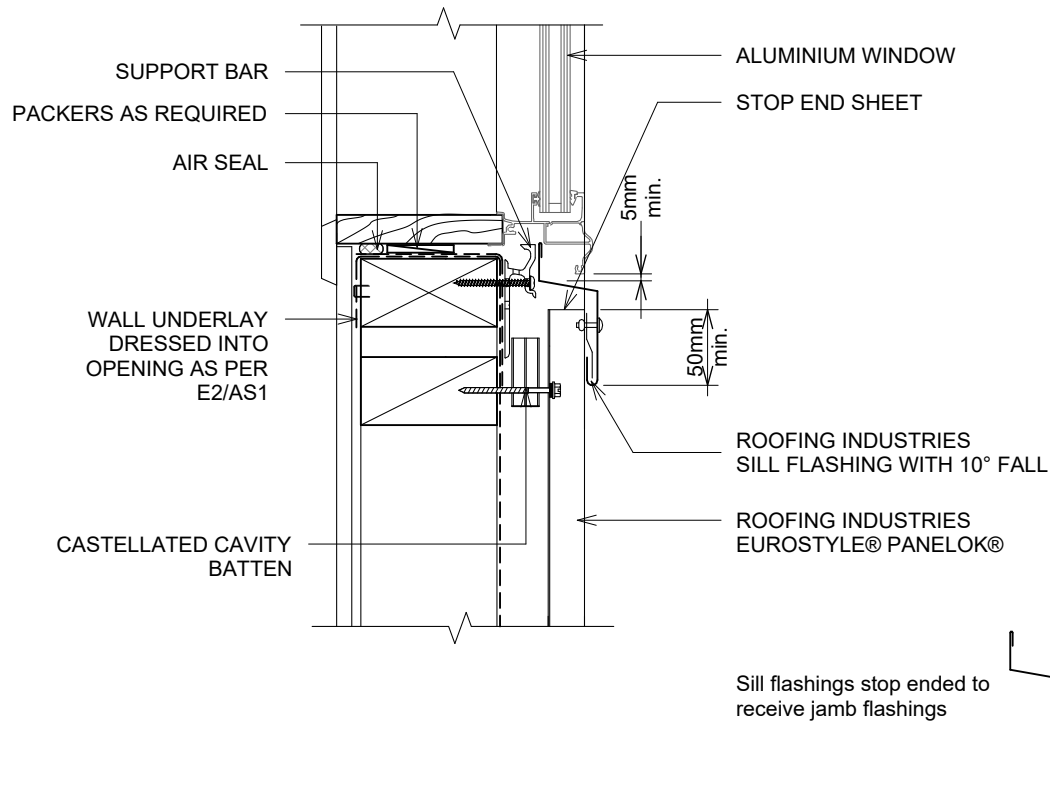

DETAIL ANNOTATION:

1. REFER TO E2/AS1 FOR GENERAL WINDOW OPENING FOR WRAPPING OF FRAMED OPENING PRIOR TO WINDOW INSTALLATION.
2. WINDOW PROFILE TO BE SELECTED TO ACHIEVE COVER SHOWN IN DETAILS.
3. ARCHITRAVE'S ARE SHOWN FOR CONSISTENCY ONLY, DETAIL MAY BE USED WITH REBATED LINER.
4. FOR FIXING METHODS REFER TO PANELOK PRODUCT TECHNICAL STATEMENT AND INSTALLATION GUIDE.
5. JOINERY AND JOINERY FLASHING INTERFACE IS INDICATIVE ONLY. REFER TO SELECTED JOINERY MANUFACTURER'S RECOMMENDATIONS AND DETAILS.
6. SEAL HEAD FLASHING TO WINDOW IN VERY HIGH & EXTRA HIGH WIND ZONES.
7. CASTELLATED TIMBER BATTEN OR APPROVED DRAINED BATTEN MAY BE USED WITH THIS SYSTEM.
8. TREATED TIMBER CAVITY BATTENS CONTAINING CORROSIVE TREATMENTS MUST BE SEPARATED FROM METAL CLADDING.
9. CLOSE OFF ANY ROOF VENTILATION TO WALL CAVITY.
10. FASTENERS TO BE COMPATIBLE WITH MATERIAL BEING FIXED AND THE SUITABLE GRADE FOR THE ENVIRONMENT IN WHICH LOCATED.
11. LIAISE WITH WINDOW MANUFACTURER PRIOR TO INSTALLATION.

GENERAL NOTES:

- These details to be read with Roofing Industries Eurostyle® panelok® Product Technical Statement and Installation Guide.
- The building designer is ultimately responsible to ensure that the details used meet the requirements of the NZ Building Code for the specific project.
- Details of the supporting structure (including cavity battens if used) are indicative only and are the responsibility of the building designer. For steel framed buildings thermal break cavity battens may be required.
- Roof/wall underlay selection are the responsibility of the designer. Underlay to be installed in accordance with underlay manufacturer's recommendations and requirements.
- These details are for Roofing Industries profile/s as nominated and may not be applicable to other profiles.
- This drawing is the copyright of 'Roofing Industries' and can only be copied or reproduced with their permission.
- Further information can be obtained from the NZ Metal Roof & Wall Cladding Code of Practice: www.metalroofing.org.nz or E2/AS1 where applicable.
- Details are for steel-based materials, other substrates may require some changes.
- All dimensions are nominal.
- Fixing: The designer needs to check the screw manufacturers technical data of the selected screw type for the design wind load and the material being fastened to.

Copyright detail © 2025




EUROSTYLE® PANELOK® CLADDING

WINDOW / DOOR HEAD FLASHING FOR VERTICAL CLADDING ON CAVITY - WINDOW ON CLADDING LINE

Detail Number: RI-ESPWVC-140A

Date drawn: 25/02/2025

Scale: 1 : 5@ A4

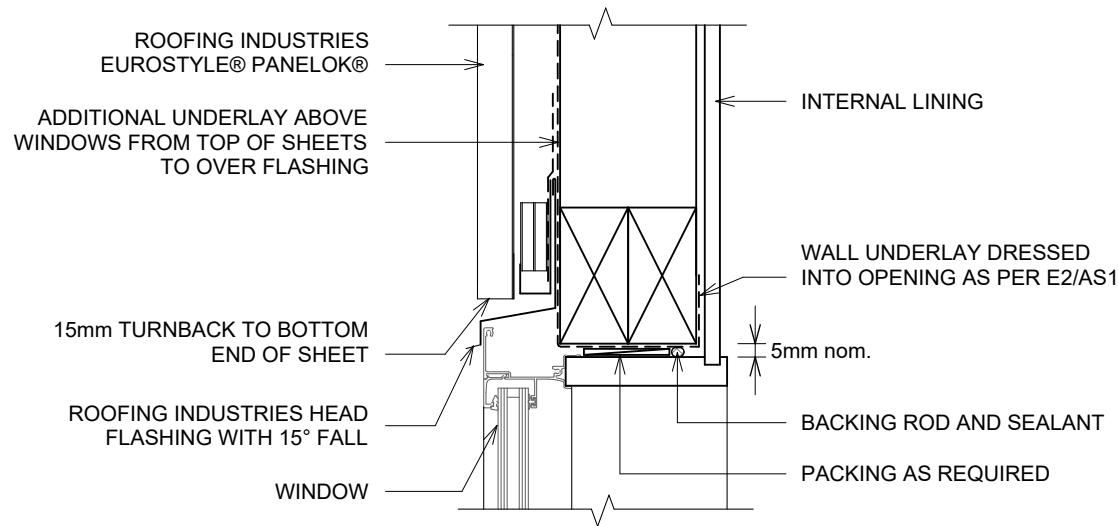

DETAIL ANNOTATION:

1. REFER TO E2/AS1 FOR GENERAL WINDOW OPENING FOR WRAPPING OF FRAMED OPENING PRIOR TO WINDOW INSTALLATION.
2. WINDOW PROFILE TO BE SELECTED TO ACHIEVE COVER SHOWN IN DETAILS.
3. ARCHITRAVE'S ARE SHOWN FOR CONSISTENCY ONLY, DETAIL MAY BE USED WITH REBATED LINER.
4. FOR FIXING METHODS REFER TO PANELOK PRODUCT TECHNICAL STATEMENT AND INSTALLATION GUIDE.
5. JOINERY AND JOINERY FLASHING INTERFACE IS INDICATIVE ONLY. REFER TO SELECTED JOINERY MANUFACTURER'S RECOMMENDATIONS AND DETAILS.
6. SEAL HEAD FLASHING TO WINDOW IN VERY HIGH & EXTRA HIGH WIND ZONES.
7. CASTELLATED TIMBER BATTEN OR APPROVED DRAINED BATTEN MAY BE USED WITH THIS SYSTEM.
8. TREATED TIMBER CAVITY BATTENS CONTAINING CORROSIVE TREATMENTS MUST BE SEPARATED FROM METAL CLADDING.
9. CLOSE OFF ANY ROOF VENTILATION TO WALL CAVITY.
10. FASTENERS TO BE COMPATIBLE WITH MATERIAL BEING FIXED AND THE SUITABLE GRADE FOR THE ENVIRONMENT IN WHICH LOCATED.
11. LIAISE WITH WINDOW MANUFACTURER PRIOR TO INSTALLATION.

HEAD FLASHING



GENERAL NOTES:

- These details to be read with Roofing Industries Eurostyle® panelok® Product Technical Statement and Installation Guide.
- The building designer is ultimately responsible to ensure that the details used meet the requirements of the NZ Building Code for the specific project.
- Details of the supporting structure (including cavity battens if used) are indicative only and are the responsibility of the building designer. For steel framed buildings thermal break cavity battens may be required.
- Roof/wall underlay selection are the responsibility of the designer. Underlay to be installed in accordance with underlay manufacturer's recommendations and requirements.
- These details are for Roofing Industries profile/s as nominated and may not be applicable to other profiles.
- This drawing is the copyright of 'Roofing Industries' and can only be copied or reproduced with their permission.
- Further information can be obtained from the NZ Metal Roof & Wall Cladding Code of Practice: www.metalroofing.org.nz or E2/AS1 where applicable.
- Details are for steel-based materials, other substrates may require some changes.
- All dimensions are nominal.
- Fixing: The designer needs to check the screw manufacturers technical data of the selected screw type for the design wind load and the material being fastened to.

Copyright detail © 2025




EUROSTYLE® PANELOK® CLADDING

WINDOW / DOOR JAMB FLASHING FOR VERTICAL CLADDING - WINDOW ON CLADDING LINE

Detail Number: RI-ESPWVC-140B

Date drawn: 25/02/2025

Scale: 1 : 5@ A4

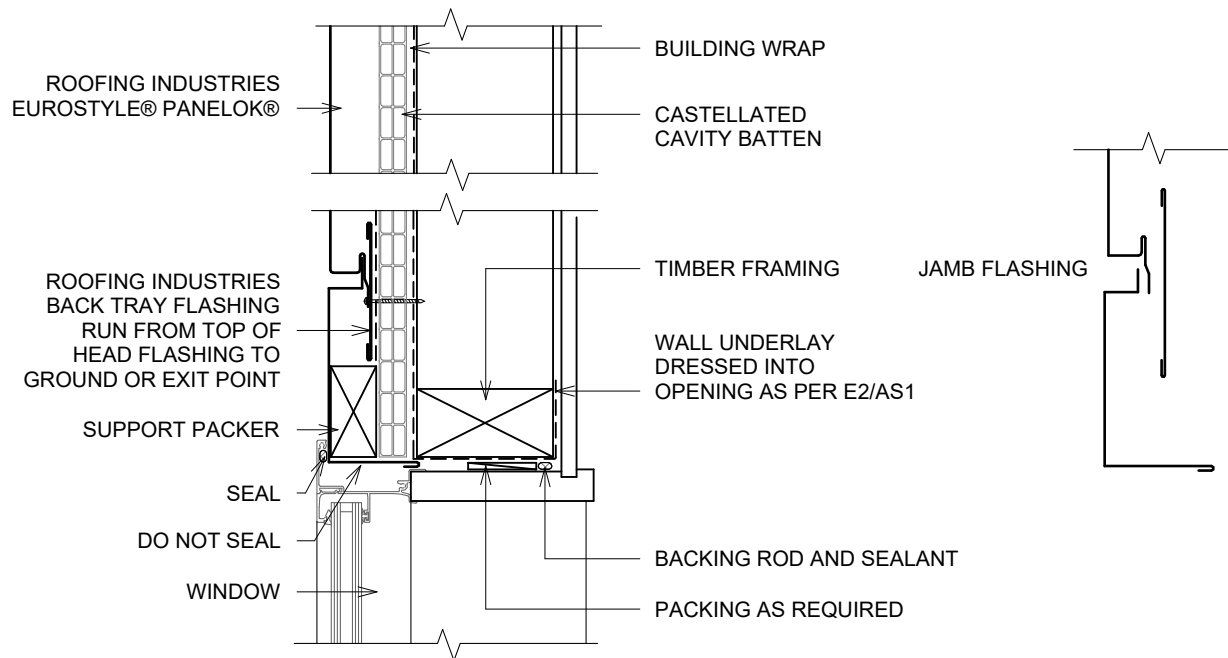

DETAIL ANNOTATION:

1. REFER TO E2/AS1 FOR GENERAL WINDOW OPENING FOR WRAPPING OF FRAMED OPENING PRIOR TO WINDOW INSTALLATION.
2. ARCHITRAVE'S ARE SHOWN FOR CONSISTENCY ONLY, DETAIL MAY BE USED WITH REBATED LINER.
3. JOINERY AND JOINERY FLASHING INTERFACE IS INDICATIVE ONLY. REFER TO SELECTED JOINERY MANUFACTURER'S RECOMMENDATIONS AND DETAILS.
4. FOR FIXING METHODS REFER TO PANELOK PRODUCT TECHNICAL STATEMENT AND INSTALLATION GUIDE.
5. ALLOW FOR SEPARATION FROM ANY CORROSIVE TIMBER TREATMENTS.
6. CASTELLATED TIMBER BATTEN OR APPROVED DRAINED BATTEN MAY BE USED WITH THIS SYSTEM.
7. TREATED TIMBER CAVITY BATTENS CONTAINING CORROSIVE TREATMENTS MUST BE SEPARATED FROM METAL CLADDING.
8. CLOSE OFF ANY ROOF VENTILATION TO WALL CAVITY.
9. FASTENERS TO BE COMPATIBLE WITH MATERIAL BEING FIXED AND THE SUITABLE GRADE FOR THE ENVIRONMENT IN WHICH LOCATED.
10. LIAISE WITH WINDOW MANUFACTURER PRIOR TO INSTALLATION.

GENERAL NOTES:

- These details to be read with Roofing Industries Eurostyle® panelok® Product Technical Statement and Installation Guide.
- The building designer is ultimately responsible to ensure that the details used meet the requirements of the NZ Building Code for the specific project.
- Details of the supporting structure (including cavity battens if used) are indicative only and are the responsibility of the building designer. For steel framed buildings thermal break cavity battens may be required.
- Roof/wall underlay selection are the responsibility of the designer. Underlay to be installed in accordance with underlay manufacturer's recommendations and requirements.
- These details are for Roofing Industries profile/s as nominated and may not be applicable to other profiles.
- This drawing is the copyright of 'Roofing Industries' and can only be copied or reproduced with their permission.
- Further information can be obtained from the NZ Metal Roof & Wall Cladding Code of Practice: www.metalroofing.org.nz or E2/AS1 where applicable.
- Details are for steel-based materials, other substrates may require some changes.
- All dimensions are nominal.
- Fixing: The designer needs to check the screw manufacturers technical data of the selected screw type for the design wind load and the material being fastened to.

Copyright detail © 2025




EUROSTYLE® PANELOK® CLADDING

SILL FLASHING FOR VERTICAL CLADDING ON CAVITY (WINDOW/DOOR ON CLADDING LINE)

Detail Number: RI-ESPWVC-140C

Date drawn: 25/02/2025

Scale: 1 : 5@ A4

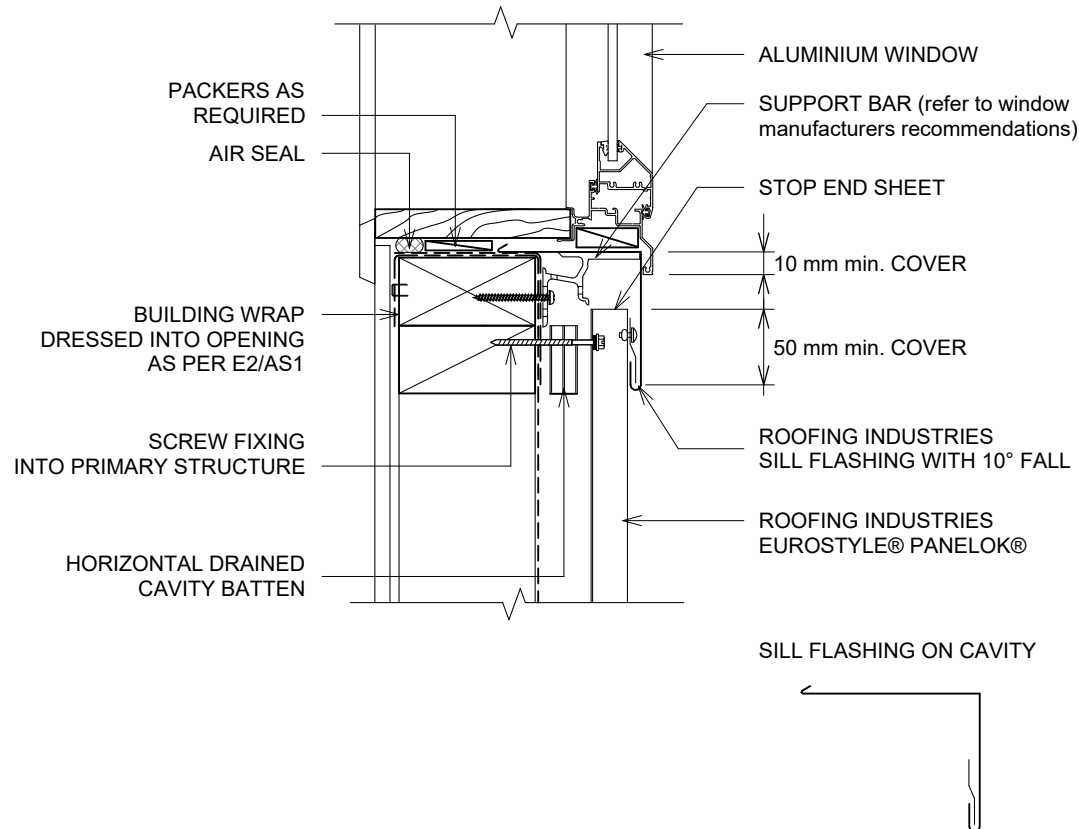

DETAIL ANNOTATION:

1. REFER TO E2/AS1 FOR GENERAL WINDOW OPENING FOR WRAPPING OF FRAMED OPENING PRIOR TO WINDOW INSTALLATION.
2. WINDOW PROFILE TO BE SELECTED TO ACHIEVE COVER SHOWN IN DETAILS.
3. ARCHITRAVE'S ARE SHOWN FOR CONSISTENCY ONLY, DETAIL MAY BE USED WITH REBATED LINER.
4. FOR FIXING METHODS REFER TO PANELOK PRODUCT TECHNICAL STATEMENT AND INSTALLATION GUIDE.
5. WHERE SUPPORT BRACKETS ARE REQUIRED BY THE WINDOW MANUFACTURER TO CARRY THE FRAME AND GLAZING LOADS THEY MUST BE SUPPLIED AS AN INTEGRAL PART OF THE WINDOW MANUFACTURER'S RECOMMENDATIONS.
6. TREATED TIMBER CAVITY BATTENS CONTAINING CORROSIVE TREATMENTS MUST BE SEPARATED FROM METAL CLADDING.
7. CASTELLATED BATTEN OR APPROVED DRAINED BATTEN CAN BE USED WITH THIS SYSTEM
8. FASTENERS TO BE COMPATIBLE WITH MATERIAL BEING FIXED AND THE SUITABLE GRADE FOR THE ENVIRONMENT IN WHICH LOCATED
9. JOINERY AND JOINERY FLASHING INTERFACE IS INDICATIVE ONLY. REFER TO SELECTED JOINERY MANUFACTURER'S RECOMMENDATIONS AND DETAILS.
10. LIAISE WITH WINDOW MANUFACTURER PRIOR TO INSTALLATION.

GENERAL NOTES:

- These details to be read with Roofing Industries Eurostyle® panelok® Product Technical Statement and Installation Guide.
- The building designer is ultimately responsible to ensure that the details used meet the requirements of the NZ Building Code for the specific project.
- Details of the supporting structure (including cavity battens if used) are indicative only and are the responsibility of the building designer. For steel framed buildings thermal break cavity battens may be required.
- Roof/wall underlay selection are the responsibility of the designer. Underlay to be installed in accordance with underlay manufacturer's recommendations and requirements.
- These details are for Roofing Industries profile/s as nominated and may not be applicable to other profiles.
- This drawing is the copyright of 'Roofing Industries' and can only be copied or reproduced with their permission.
- Further information can be obtained from the NZ Metal Roof & Wall Cladding Code of Practice: www.metalroofing.org.nz or E2/AS1 where applicable.
- Details are for steel-based materials, other substrates may require some changes.
- All dimensions are nominal.
- Fixing: The designer needs to check the screw manufacturers technical data of the selected screw type for the design wind load and the material being fastened to.

Copyright detail © 2025




EUROSTYLE® PANELOK® CLADDING

WALL PIPE PENETRATION

Detail Number: RI-ESPWVC-160

Date drawn: 25/02/2025

Scale: 1 : 5@ A4

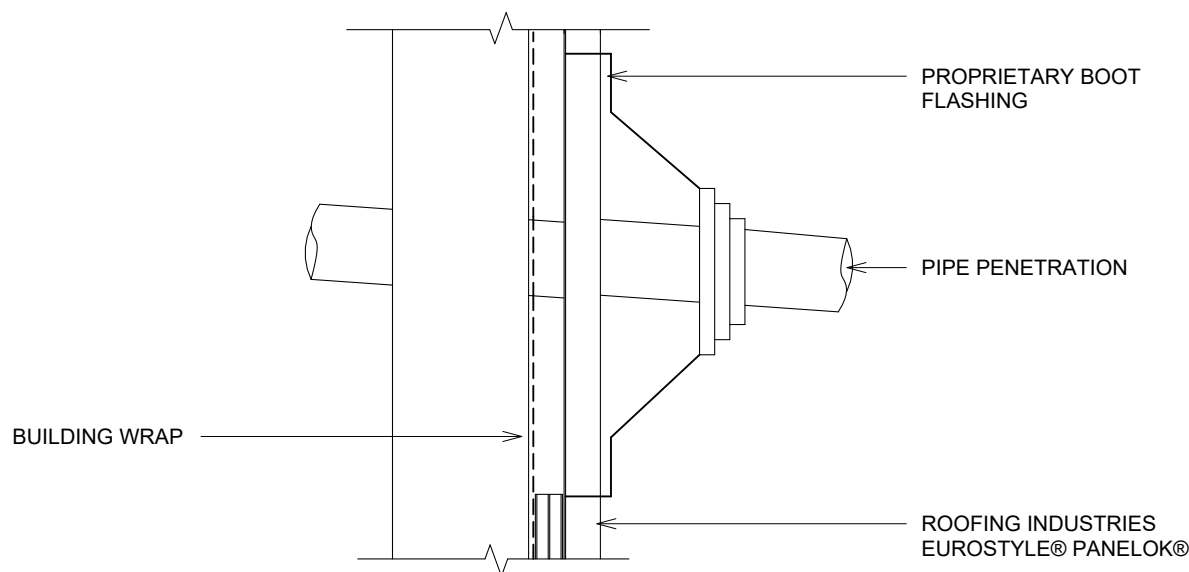

DETAIL ANNOTATION:

1. TREATED TIMBER CAVITY BATTENS CONTAINING CORROSIVE MATERIAL MUST BE SEPARATED FROM METAL CLADDING.
2. CASTELLATED BATTEN OR APPROVED DRAINED BATTEN CAN BE USED WITH THIS SYSTEM
3. FASTENERS TO BE COMPATIBLE WITH MATERIAL BEING FIXED AND THE SUITABLE GRADE FOR THE ENVIRONMENT IN WHICH LOCATED.
4. FOR FIXING METHODS REFER TO PANELOK PRODUCT TECHNICAL STATEMENT AND INSTALLATION GUIDE.

GENERAL NOTES:

- These details to be read with Roofing Industries Eurostyle® panelok® Product Technical Statement and Installation Guide.
- The building designer is ultimately responsible to ensure that the details used meet the requirements of the NZ Building Code for the specific project.
- Details of the supporting structure (including cavity battens if used) are indicative only and are the responsibility of the building designer. For steel framed buildings thermal break cavity battens may be required.
- Roof/wall underlay selection are the responsibility of the designer. Underlay to be installed in accordance with underlay manufacturer's recommendations and requirements.
- These details are for Roofing Industries profile/s as nominated and may not be applicable to other profiles.
- This drawing is the copyright of 'Roofing Industries' and can only be copied or reproduced with their permission.
- Further information can be obtained from the NZ Metal Roof & Wall Cladding Code of Practice: www.metalroofing.org.nz or E2/AS1 where applicable.
- Details are for steel-based materials, other substrates may require some changes.
- All dimensions are nominal.
- Fixing: The designer needs to check the screw manufacturers technical data of the selected screw type for the design wind load and the material being fastened to.

Copyright detail © 2025




EUROSTYLE® PANELOK® CLADDING

TRANSVERSE JUNCTION FOR VERTICAL CLADDING ON CAVITY

Detail Number: RI-ESPWVC-170

Date drawn: 25/02/2025

Scale: 1 : 5@ A4

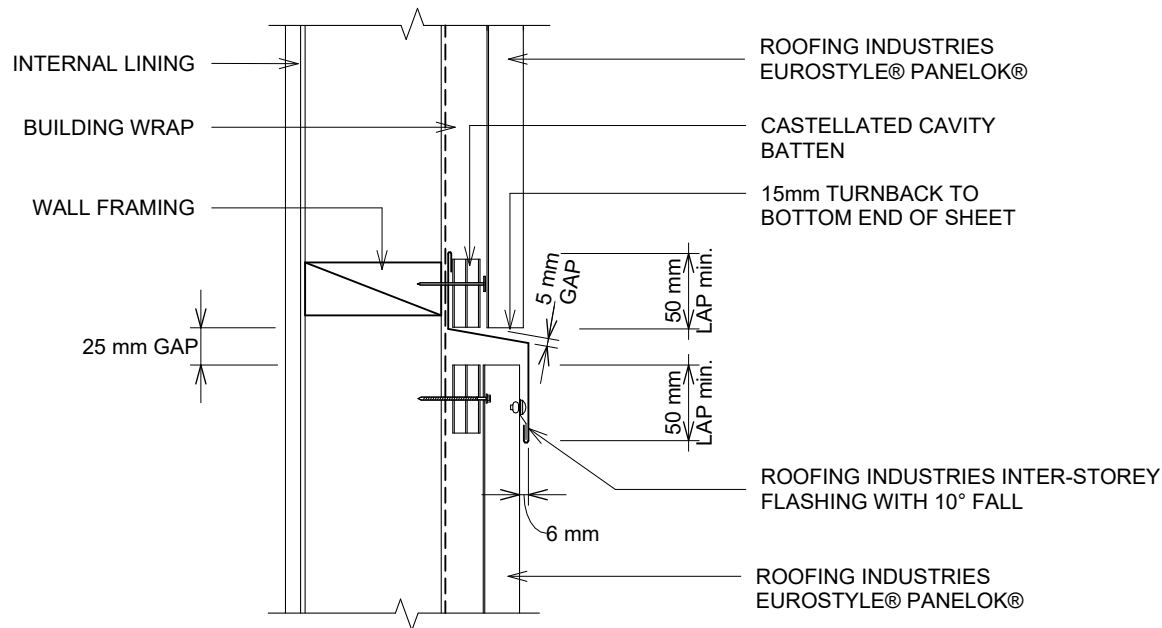

DETAIL ANNOTATION:

1. TREATED TIMBER CAVITY BATTENS CONTAINING CORROSIVE TREATMENTS MUST BE SEPARATED FROM METAL CLADDING.
2. CASTELLATED BATTEN OR APPROVED DRAINED BATTEN CAN BE USED WITH THIS SYSTEM.
3. CLOSE OFF ANY ROOF VENTILATION TO WALL CAVITY.
4. FOR FIXING METHODS REFER TO PANELOK PRODUCT TECHNICAL STATEMENT AND INSTALLATION GUIDE.
5. FASTENERS TO BE COMPATIBLE WITH MATERIAL BEING FIXED AND THE SUITABLE GRADE FOR THE ENVIRONMENT IN WHICH LOCATED

INTER-STOREY FLASHING



GENERAL NOTES:

- These details to be read with Roofing Industries Eurostyle® panelok® Product Technical Statement and Installation Guide.
- The building designer is ultimately responsible to ensure that the details used meet the requirements of the NZ Building Code for the specific project.
- Details of the supporting structure (including cavity battens if used) are indicative only and are the responsibility of the building designer. For steel framed buildings thermal break cavity battens may be required.
- Roof/wall underlay selection are the responsibility of the designer. Underlay to be installed in accordance with underlay manufacturer's recommendations and requirements.
- These details are for Roofing Industries profile/s as nominated and may not be applicable to other profiles.
- This drawing is the copyright of 'Roofing Industries' and can only be copied or reproduced with their permission.
- Further information can be obtained from the NZ Metal Roof & Wall Cladding Code of Practice: www.metalroofing.org.nz or E2/AS1 where applicable.
- Details are for steel-based materials, other substrates may require some changes.
- All dimensions are nominal.
- Fixing: The designer needs to check the screw manufacturers technical data of the selected screw type for the design wind load and the material being fastened to.

Copyright detail © 2025




EUROSTYLE® PANELOK® CLADDING SHEET PACKER OPTIONS

Detail Number: RI-ESPWVC-180

Date drawn: 25/02/2025

Scale: 1 : 5@ A4

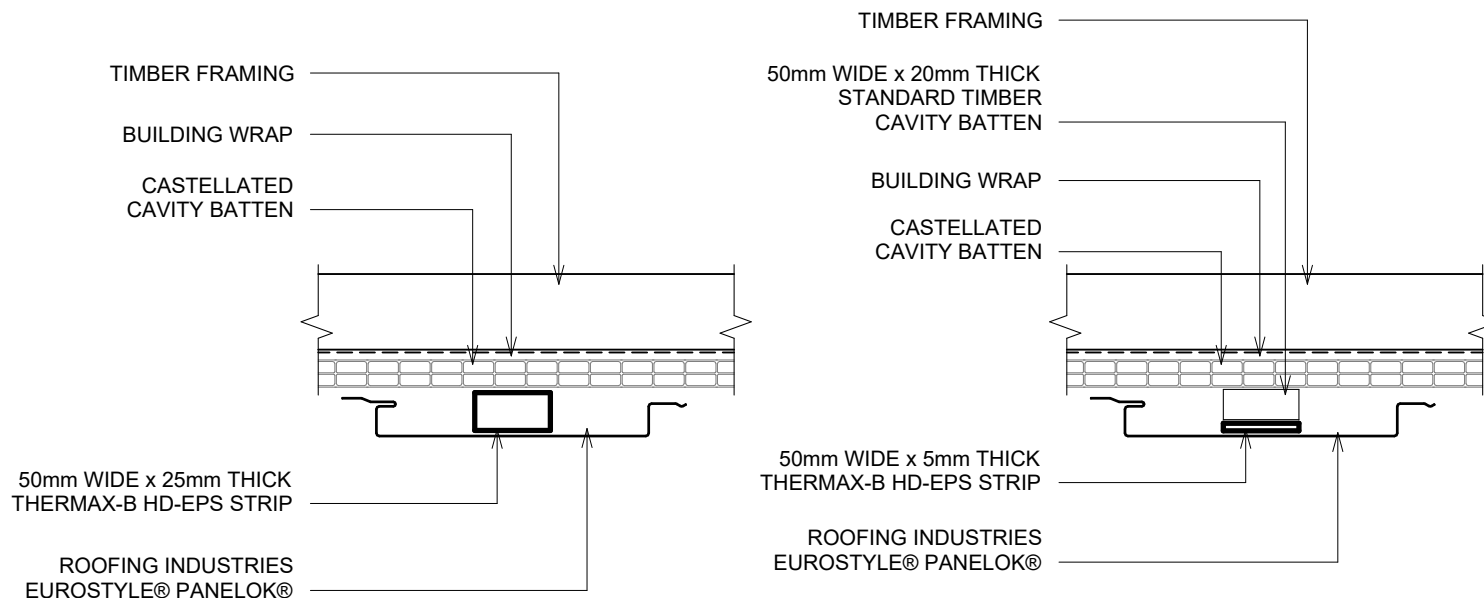

DETAIL ANNOTATION:

1. TREATED TIMBER CAVITY BATTENS CONTAINING CORROSIVE MATERIAL MUST BE SEPARATED FROM METAL CLADDING.
2. CASTELLATED BATTEN OR APPROVED DRAINED BATTEN CAN BE USED WITH THIS SYSTEM
3. FASTENERS TO BE COMPATIBLE WITH MATERIAL BEING FIXED AND THE SUITABLE GRADE FOR THE ENVIRONMENT IN WHICH LOCATED.
4. FOR FIXING METHODS REFER TO PANELOK PRODUCT TECHNICAL STATEMENT AND INSTALLATION GUIDE.
5. PACKERS REQUIRED FOR PANEL WIDTHS OF 256mm AND GREATER.

GENERAL NOTES:

- These details to be read with Roofing Industries Eurostyle® panelok® Product Technical Statement and Installation Guide.
- The building designer is ultimately responsible to ensure that the details used meet the requirements of the NZ Building Code for the specific project.
- Details of the supporting structure (including cavity battens if used) are indicative only and are the responsibility of the building designer. For steel framed buildings thermal break cavity battens may be required.
- Roof/wall underlay selection are the responsibility of the designer. Underlay to be installed in accordance with underlay manufacturer's recommendations and requirements.
- These details are for Roofing Industries profile/s as nominated and may not be applicable to other profiles.
- This drawing is the copyright of 'Roofing Industries' and can only be copied or reproduced with their permission.
- Further information can be obtained from the NZ Metal Roof & Wall Cladding Code of Practice: www.metalroofing.org.nz or E2/AS1 where applicable.
- Details are for steel-based materials, other substrates may require some changes.
- All dimensions are nominal.
- Fixing: The designer needs to check the screw manufacturers technical data of the selected screw type for the design wind load and the material being fastened to.

Copyright detail © 2025

