

LossnayPro LGH-50RVS

An in-ceiling balanced pressure sensible heat recovery ventilation unit featuring a non-permeable counter flow type plastic core. The system can achieve a high thermal exchange efficiency of up to 93%* and extract from high moisture areas.

Calculation of product embodied carbon under TM65 ANZ local Addendum by CIBSE.



Embodied Carbon Result with 'Mid-level
TM65 Calculation' Method Total:

398 (kg CO₂e)


Assessment Date:
27th September 2023

Assessor / Organisation:
Mitsubishi Electric

Contact:
compliance@bdt.co.nz


Valid Country:
New Zealand

PRODUCT INFORMATION	
Type of product	MVHR
Equipment capacity	139 L/s
Product weight	55.0kg
Material breakdown for at least 95% of product weight	Yes
Product service life	15 years
Type of refrigerant	N/A
Refrigerant charge	0kg
Country of origin	Japan
Product complexity	Category 3: High

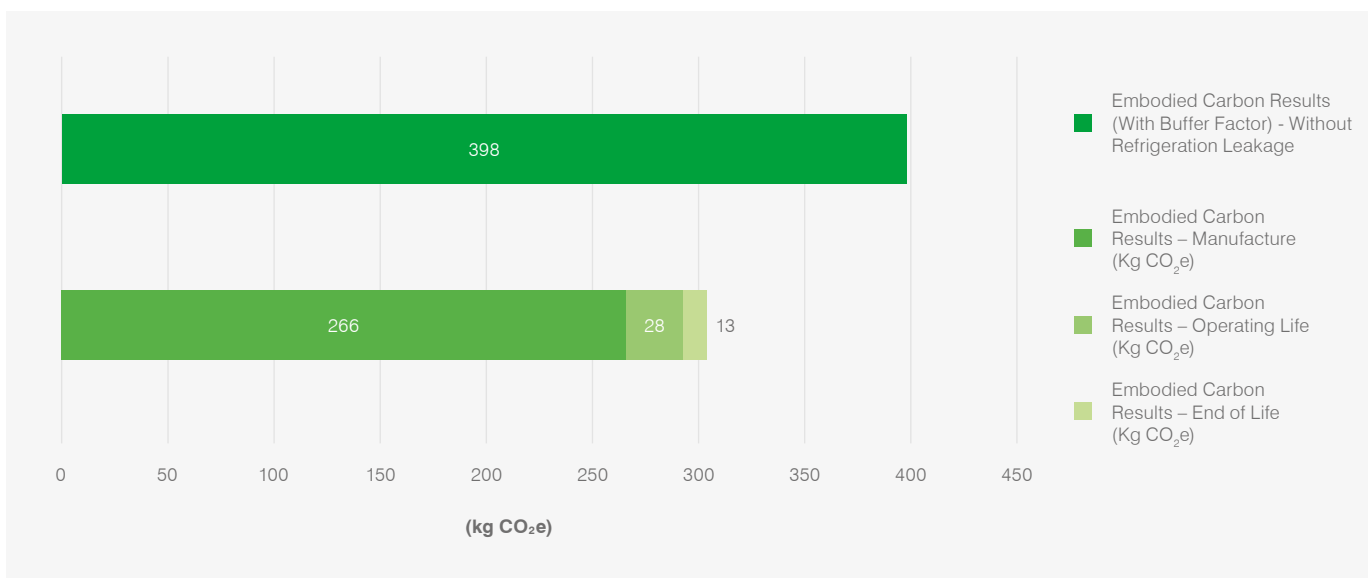

*Efficiency achieved at fan speed 1.

Results Breakdown - Embodied Carbon A1 – C4 (Excluding B1 and C1)

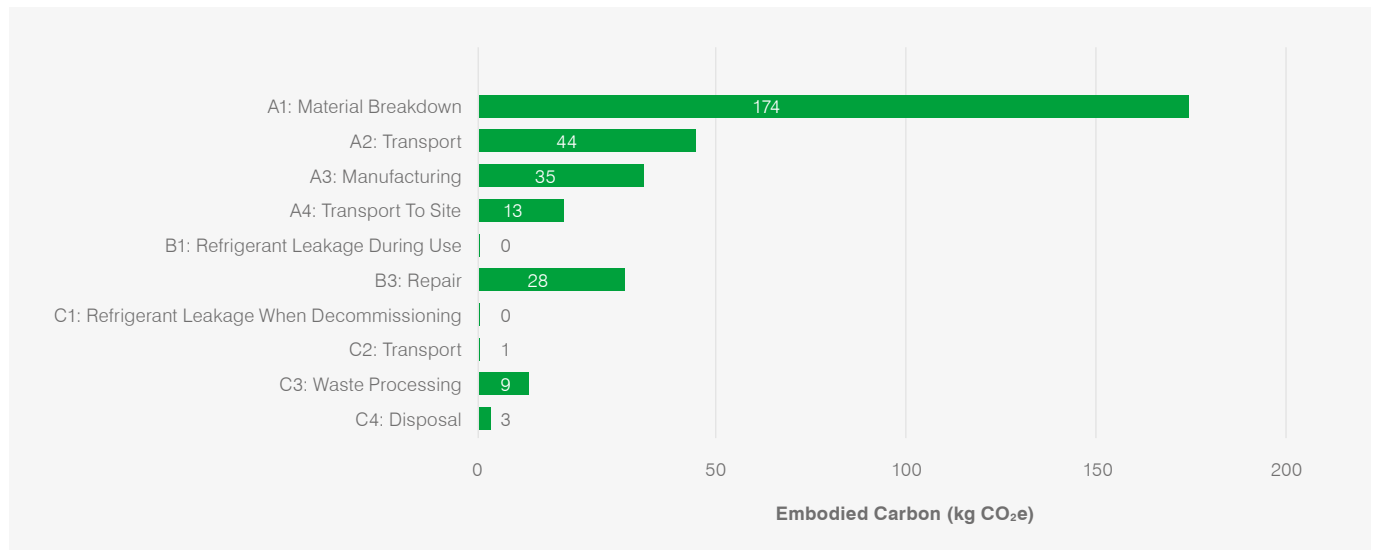

Summary of Embodied Carbon Results (kg CO₂e)

A1 – C4 (Excluding B1 and C1)	307
A1 – C4 with Buffer Factor (Excluding B1 and C1)	398
B1: Refrigerant Leakage During Life + C1: Refrigerant Leakage at End of Life	0

Calculation Assumptions


A1: Material Carbon Coefficient Source	TM65 ANZ Local Addendum
A4: Transport to site distances	10,000km by sea, 300km by road (TM65 ANZ assumption)
C4: Percentage of unit being recycled	70% (TM65 ANZ assumption)

Note: Data is correct at time of document publication and may be subject to vary based on manufacturing and shipping variations on a case by case basis.

For more information please visit our website
or call our Applied Products Team.
www.mitsubishi-electric.co.nz | 0800 784 382

PUBLISHED JAN 2024

 PLEASE LOOK AFTER THE ENVIRONMENT AND RECYCLE

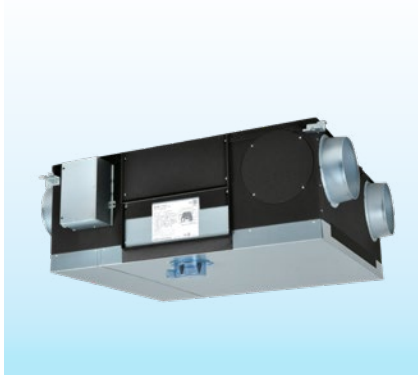

LossnayPro LGH-80RVS

An in-ceiling balanced pressure sensible heat recovery ventilation unit featuring a non-permeable counter flow type plastic core. The system can achieve a high thermal exchange efficiency of up to 90%* and extract from high moisture areas.

Calculation of product embodied carbon under TM65 ANZ local Addendum by CIBSE.



Embodied Carbon Result with 'Mid-level TM65 Calculation' Method Total:

456 (kg CO₂e)

Assessment Date:

31st August 2023

Assessor / Organisation:

Mitsubishi Electric


Contact:

compliance@bdt.co.nz

Valid Country:


New Zealand

PRODUCT INFORMATION	
Type of product	MVHR
Equipment capacity	222 L/s
Product weight	66.0kg
Material breakdown for at least 95% of product weight	Yes
Product service life	15 years
Type of refrigerant	N/A
Refrigerant charge	0kg
Country of origin	Japan
Product complexity	Category 3: High

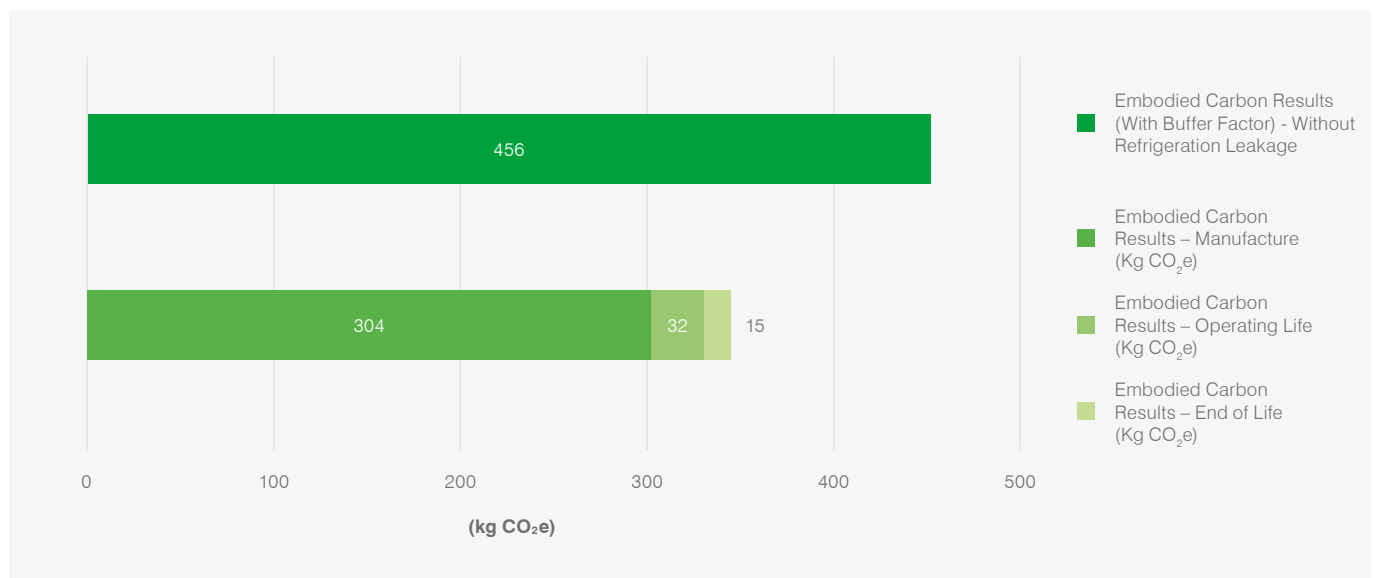

*Efficiency achieved at fan speed 1.

Results Breakdown - Embodied Carbon A1 – C4 (Excluding B1 and C1)

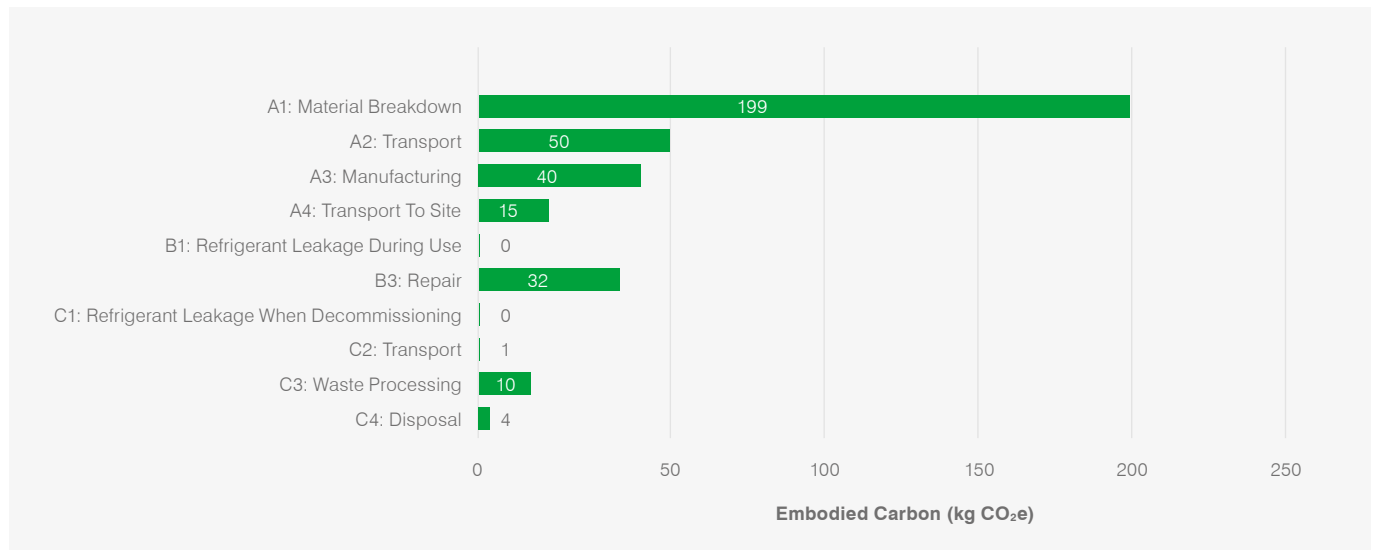

Summary of Embodied Carbon Results (kg CO₂e)

A1 – C4 (Excluding B1 and C1)	351
A1 – C4 with Buffer Factor (Excluding B1 and C1)	456
B1: Refrigerant Leakage During Life + C1: Refrigerant Leakage at End of Life	0

Calculation Assumptions


A1: Material Carbon Coefficient Source	TM65 ANZ Local Addendum
A4: Transport to site distances	10,000km by sea, 300km by road (TM65 ANZ assumption)
C4: Percentage of unit being recycled	70% (TM65 ANZ assumption)

Note: Data is correct at time of document publication and may be subject to vary based on manufacturing and shipping variations on a case by case basis.

For more information please visit our website
or call our Applied Products Team.
www.mitsubishi-electric.co.nz | 0800 784 382

PUBLISHED JAN 2024

 PLEASE LOOK AFTER THE ENVIRONMENT AND RECYCLE

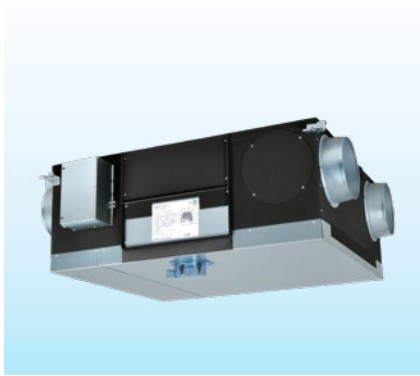

LossnayPro LGH-100RVS

An in-ceiling balanced pressure sensible heat recovery ventilation unit featuring a non-permeable counter flow type plastic core. The system can achieve a high thermal exchange efficiency of up to 90%* and extract from high moisture areas.

Calculation of product embodied carbon under TM65 ANZ local Addendum by CIBSE.



Embodied Carbon Result with 'Mid-level TM65 Calculation' Method Total:

527 (kg CO₂e)

Assessment Date:

31st August 2023

Assessor / Organisation:

Mitsubishi Electric


Contact:

compliance@bdt.co.nz

Valid Country:


New Zealand

PRODUCT INFORMATION	
Type of product	MVHR
Equipment capacity	278 L/s
Product weight	76.0kg
Material breakdown for at least 95% of product weight	Yes
Product service life	15 years
Type of refrigerant	N/A
Refrigerant charge	0kg
Country of origin	Japan
Product complexity	Category 3: High

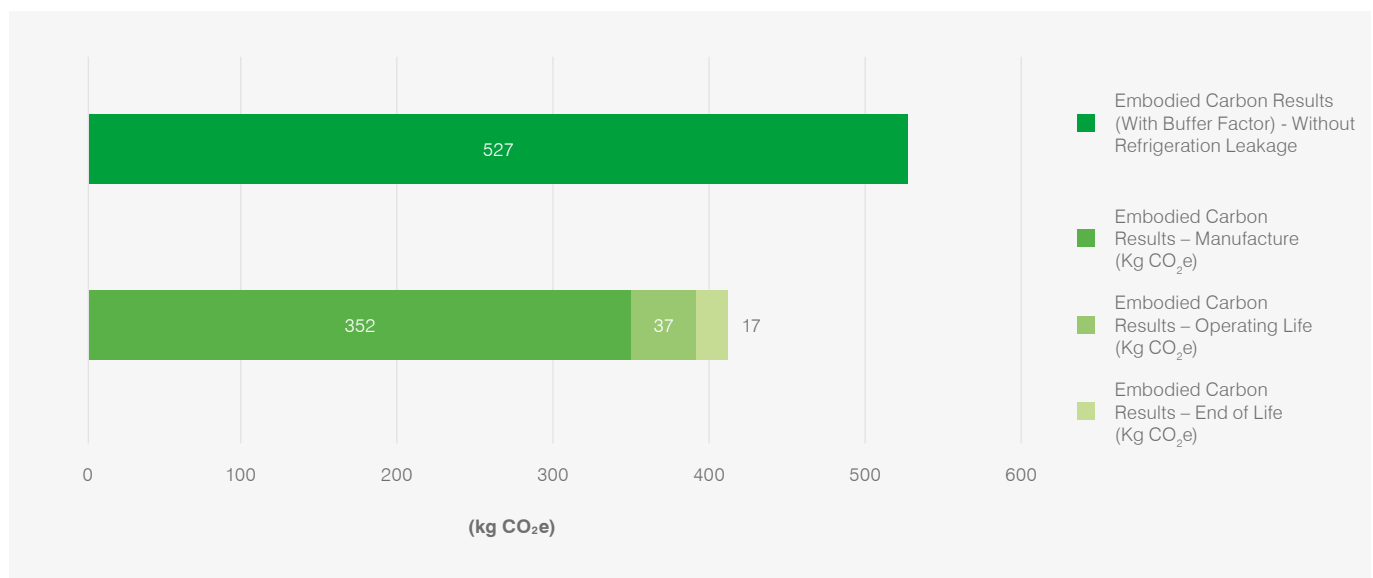

*Efficiency achieved at fan speed 1.

Results Breakdown - Embodied Carbon A1 – C4 (Excluding B1 and C1)

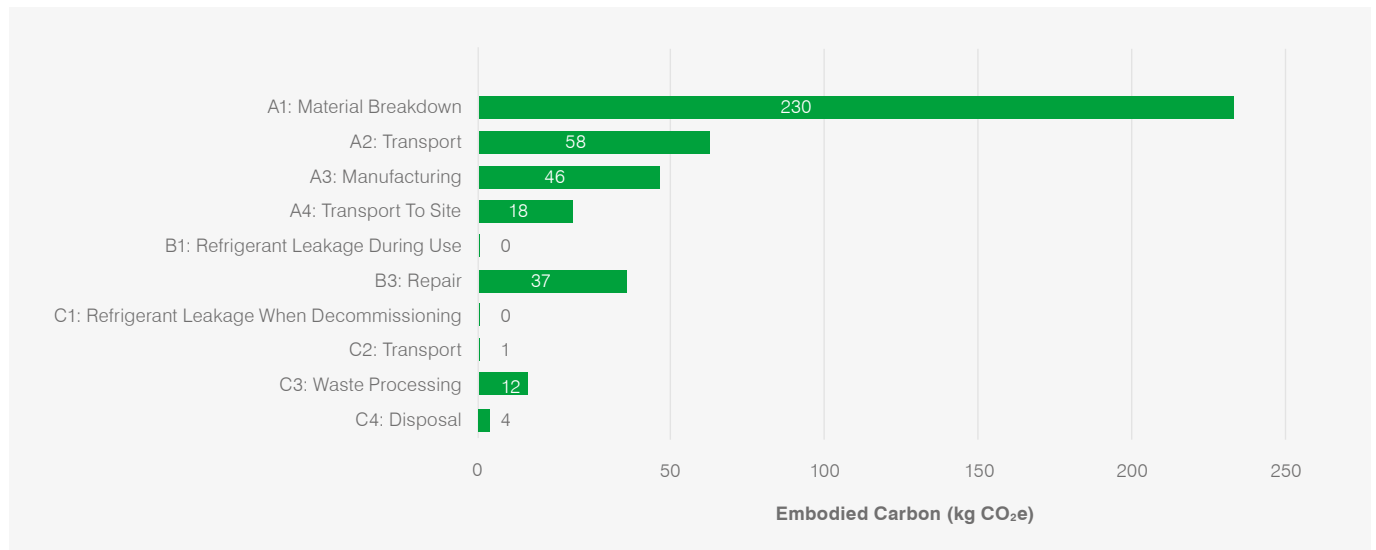

Summary of Embodied Carbon Results (kg CO₂e)

A1 – C4 (Excluding B1 and C1)	406
A1 – C4 with Buffer Factor (Excluding B1 and C1)	527
B1: Refrigerant Leakage During Life + C1: Refrigerant Leakage at End of Life	0

Calculation Assumptions

A1: Material Carbon Coefficient Source	TM65 ANZ Local Addendum
A4: Transport to site distances	10,000km by sea, 300km by road (TM65 ANZ assumption)
C4: Percentage of unit being recycled	70% (TM65 ANZ assumption)

Note: Data is correct at time of document publication and may be subject to vary based on manufacturing and shipping variations on a case by case basis.

For more information please visit our website
or call our Applied Products Team.
www.mitsubishi-electric.co.nz | 0800 784 382

PUBLISHED JAN 2024

 PLEASE LOOK AFTER THE ENVIRONMENT AND RECYCLE