

E-PLEX[®]


2000 CYLINDRICAL

Electronic Pushbutton Lock

Specification Sheet



Dimensions

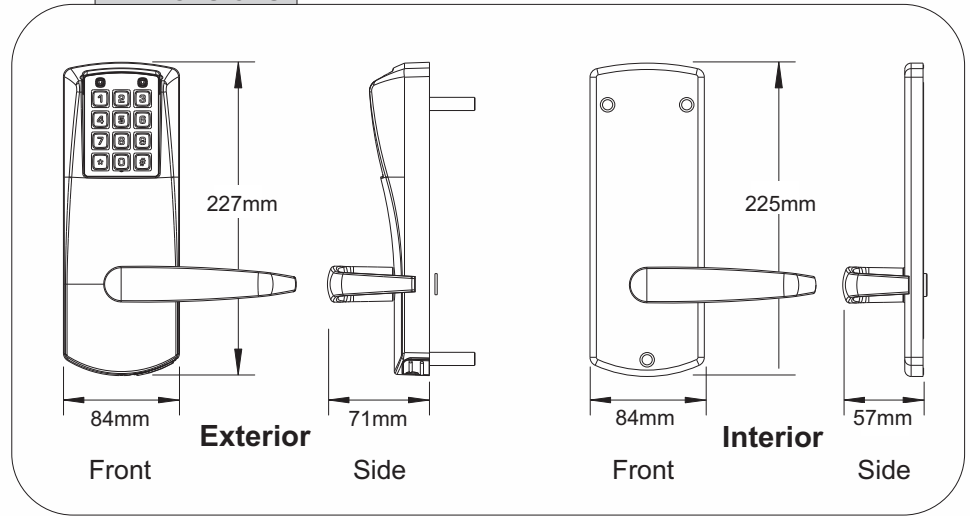

Features

Access Control	Electronic pushbutton lock - eliminates problems and costs associated with issuing, controlling and collecting keys and cards	
Locking Device	Cylindrical latch	
Number of Codes	100 access codes per door; over 100 million possible code combinations	
Programming	Locks are easily programmed via keypad	
Handing	Non-handed, pre-assembled for left-hand door installations - easily changed in the field	
Key Override	Standard with Schlage C Keyway with black Kaba cap (as shown above in the picture)	
Operation Modes	3 operation modes	PIN access Lockout Passage - can be toggled on/off or can be pre-programmed to re-lock after a certain number of hours
Authority Levels	Four different levels allow you to control who has access to specific lock functions, including: Service codes - programmed for one time access or "come and go" access for 1 to 24 hours	
User Parameters	Code Length	Adjustable to accept 4 to 8 digits
	Anti-tamper lockout	Adjustable from 3 to 9 invalid attempts with an adjustable period of 0 to 90 seconds
	Re-lock time	Adjustable from 2 to 20 seconds
Battery Operation	Batteries located in exterior housing; offers quick and easy battery replacements for institutions (Three AA Alkaline batteries provide more than 100,000 cycles) Lock data is maintained if batteries fail	
Ease of Installation	No wiring to or through the door - no risk of pinched wires	

Mechanical Features

Construction	Light-duty commercial cylindrical lockset, solid cast exterior housing, solid cast levers, cylindrical drive wear tested for extensive use in indoor and outdoor applications
Numerical Keypad	Vandal resistant, 12-button, metal keys
Door Handing	Non-handed, pre-assembled for left-hand door installations - easily changed in the field
Finishes	Satin Chrome 26D (626) housings & levers Satin Brass 04 (606) housings & levers (optional)
Backsets	2 $\frac{3}{4}$ " (70mm), 2 $\frac{3}{8}$ "(60mm) (optional)
Latch	$\frac{1}{2}$ "(13mm) latch
Minimum Stile Recommended	5" (127mm)
Weight	8 lbs. (3.63kg)

Key Override

Key-In-Lever Cylinder	Kaba 1099 6-pin cylinder - Schlage C Keyway
------------------------------	---

Installation

Ease of Installation	No wiring to or through the door - no risk of pinched wires
Door Preparation	Easily installs on wood or metal doors. Cylindrical Lock preparation with 3 additional through bore holes
Door Thickness	1 $\frac{1}{8}$ "(35mm) to 2 $\frac{1}{2}$ "(64mm). Pre-assembled to accommodate doors 1 $\frac{1}{8}$ "(41mm) to 2"(50mm)
Items Supplied Include	Lock assembly, installation manual, template and required hardware

Certification and Testing

Fire Rating	2 hour fire rated
Environmental	Indoor/Outdoor Approved -31°F (-35°C) to +151°F (66°C)

Warranty

Warranty	Two-year warranty from date of installation; built-in warranty counter in lock memory
-----------------	---

HEAD OFFICE
Unit 4, 42-44 Redfern Street
Wetherill Park NSW 2164
Phone: 02 8787 4777
Fax: 02 9609 6610

Kaba Australia Pty Limited
info@kaba.com.au www.kaba.com.au

2/40 Proprietary Street
Tingalpa QLD 4173
Phone: 07 3890 1866
Fax: 07 3890 3522

9 Susan Street
Hindmarsh SA 5007
Phone: 08 8245 7900
Fax: 08 8346 2688

Suite 133, 45 Gilby Road
Mt Waverley VIC 3149
Phone: 03 9558 9999
Fax: 03 9558 9777

Unit 1, 10 Vulcan Road
Canning Vale WA 6155
Phone: 08 9455 1088
Fax: 08 9455 7644

