


# /loft

An ultra-durable collection of 12mm thick engineered timber for commercial and other high traffic spaces.

Species	European Oak
Sustainability	FSC® Certified
Grade	Feature
Texture	Extra Light Brushed

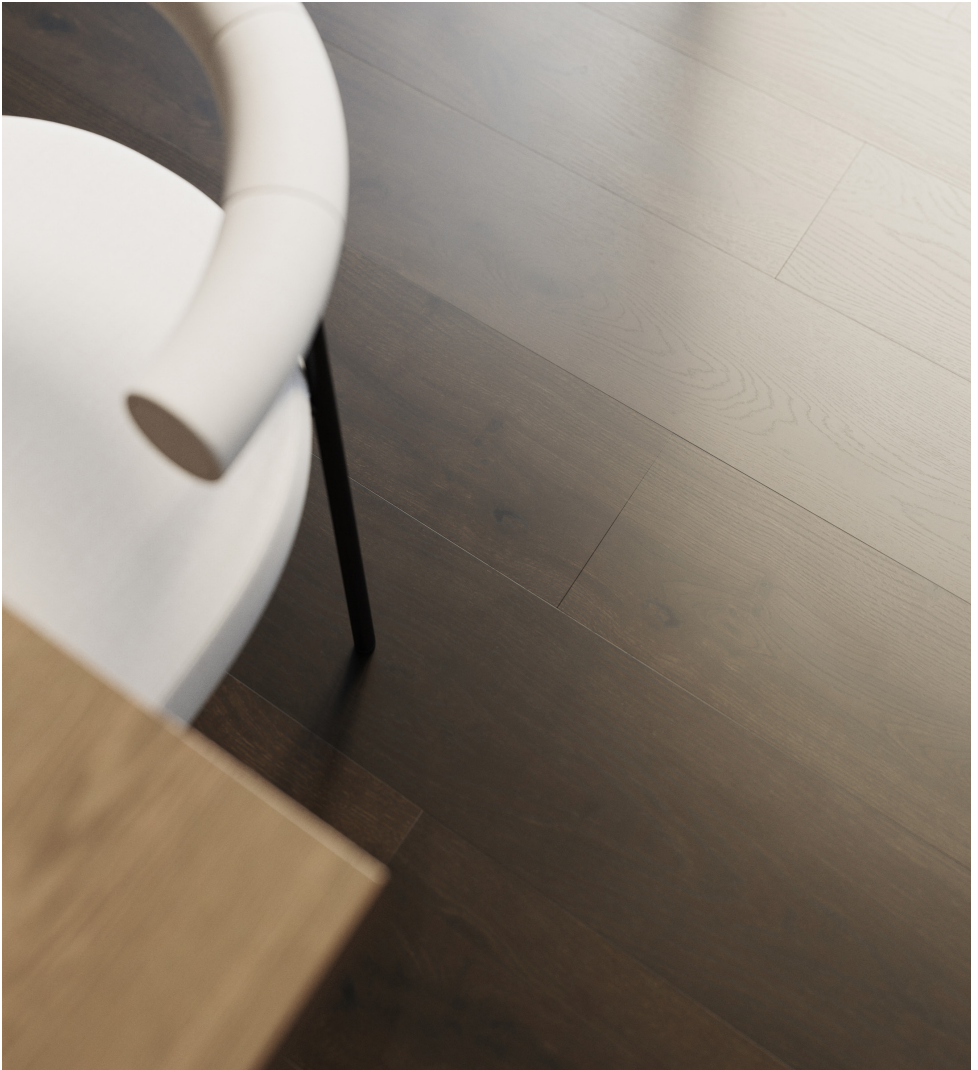

## COLLECTION

Inspired by the timeless allure of loft apartments and the unwavering resilience of commercial spaces, the Loft Collection is a durable range of 12mm thick engineered timber.


Drawing inspiration from one of the most famous cities renowned for its loft apartments and commercial spaces, we set out to create flooring that would withstand the demands of high-traffic areas while embracing the essence of New York's suburbs and neighbourhoods.

With its timeless appeal, superior durability, and commercial-grade matte finish, Loft combines sustainable natural timber with unmatched performance and is our most water-tight surface yet.




## FORMATS

Loft is available in 193mm wide feature planks with matching nosings.



### PLANK

Thickness	12/2mm
Width	193mm
Length	1830mm (<25% shorts)
Construction	Multi-Layer Engineered



### STAIR NOSING

Thickness (Tread)	12mm
Width x Height (Face)	115mm x 40mm
Length	1200mm
Construction	Solid Oak

ASTORIA



CLAREMONT



BRIGHTON



MANHATTAN



STAMFORD




TRIBECA



BROOKLYN



SOHO

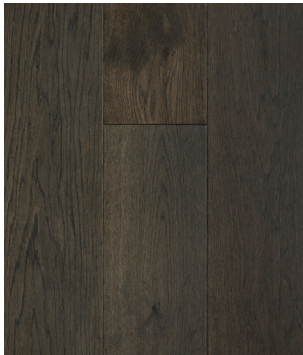

HARLEM



**COLOURS**

Loft draws inspiration from New York's renowned loft apartments and commercial spaces that withstand the demands of high-traffic.

Colour	Format	Grade	Code
<b>ASTORIA</b>	Plank	Feature	LO-AFP
	Nosing	Feature	SN-LOA
<b>CLAREMONT</b>	Plank	Feature	LO-CFP
	Nosing	Feature	SN-LOC
<b>BRIGHTON</b>	Plank	Feature	LO-BTFP
	Nosing	Feature	SN-LOBT
<b>MANHATTAN</b>	Plank	Feature	LO-MFP
	Nosing	Feature	SN-LOM
<b>STAMFORD</b>	Plank	Feature	LO-SFFP
	Nosing	Feature	SN-LOSF
<b>TRIBECA</b>	Plank	Feature	LO-TFP
	Nosing	Feature	SN-LOT
<b>BROOKLYN</b>	Plank	Feature	LO-BFP
	Nosing	Feature	SN-LOB
<b>SOHO</b>	Plank	Feature	LO-SFP
	Nosing	Feature	SN-LOS
<b>HARLEM</b>	Plank	Feature	LO-HFP
	Nosing	Feature	SN-LOH

## PRODUCT DETAILS

Species	European Oak
Origin	Central Europe
Grade	Feature
Thickness	12mm
Wear Layer	2mm Solid European Oak
Bevel	Micro-Bevel 4-Sides
Construction	Multi-Layer Engineered
Core	Eucalyptus Plywood
Backing	Alder Wood
Surface Texture	Extra Light Brushed
Finish	Pre-finished UV-Cured DuraMatte Lacquer
Surface Sheen	Extra Matte (4-7%)

## INSTALLATION

Method	Glue Down (Double Stick for Multi-Level)
Joint Profile	Tongue and Groove
Substrates <sup>A</sup>	Plywood/Particle Board/Concrete/Existing Timber
Applications	Interior Flooring/Walls/Ceilings/Other
Usage Classes	Commercial/Residential
Underfloor Heating	Hydronic/Electric <sup>B</sup>
Wet Area Suitability	Contact Forté

A. Enquire about others

B. Electric Systems set in screed (ensure screed is suitable for underfloor heating)

C. Group 1 Fire Rating for Walls and Ceilings can be achieved with an intumescent coating

## STRUCTURAL WARRANTY

Residential	25 Years
Commercial	10 Years

## SUSTAINABILITY

Certification	FSC® Certified
---------------	----------------

## TECHNICAL SPECIFICATIONS

Reaction to Fire	Floors: Critical Flux 2.2kw/m <sup>2</sup> Walls/Ceilings <sup>C</sup> : Group 3/Class Dfl-s1
Wear Layer Density	700kg/m <sup>3</sup>

## FORMALDEHYDE EMISSION

AS/NZS 2098.11	E0 (0.1mg/L) Low VOC, No added Formaldehyde
----------------	--

## SLIP RATINGS

AS/NZS 4586 Wet Test	Classification F, Mean COF 0.45
AS/NZS 4586 Dry Test	Classification X, Pendulum Mean 42 BPN

Find us on  
Masterspec



View Collection  
on our website



Auckland  
299 Great North Road  
Grey Lynn, Auckland

Christchurch  
93 Manchester Street  
Christchurch Central

Queenstown  
179 Glenda Drive  
Frankton, Queenstown

forte.co.nz  
info@forte.co.nz  
0508 35 66 77

**forté**