



## FEATURE PLANK SPECIFICATION SHEET

Indus Collection Engineered T&G plank by Forté. 18mm thick, 240mm wide, 2400mm length. Glue down installation method onto substrate. Feature grade, pre-finished with UV Cured Matte Lacquer. CodeMark Certified.

### PRODUCT DETAILS

Collection	Indus
Product Type	Engineered Plank
Availability	Stocked
Total Thickness	18mm
Width	240mm
Length	2400mm
% of Shorts	Up to 25%
Wear Layer	4mm Solid European Oak
Core	Meranti Plywood
Backing	Meranti Veneer
Construction	Multi-layer Engineered
Re-sands	Up to 2 (approx. 1mm removed per re-sand)
Surface Texture	Lightly Brushed
Surface Sheen	Matte (8%)
Bevel	Micro-bevel 4 sides (0.7mm)
Status	Pre-finished (no additional coats required)
Finish	UV Cured Matte Lacquer (6 coats)
Species	European Oak
Wood Grade	Feature (refer page 2 for details)
Filler Colour	Dependant on colour, visit forte.co.nz for accurate filler colour

The Indus Collection is also available in matching stair nosings, herringbone and selected prime colours.

### STRUCTURAL WARRANTY

10 Year Commercial	For terms and conditions see
25 Year Residential	<a href="http://www.forte.co.nz/warranties">www.forte.co.nz/warranties</a>




Mojave

Atacama

Kharan

Sahara



Colorado



Patagonia



Tanami

### SUSTAINABILITY

Sustainably Sourced | FSC® available on request  
Low VOC | No added Formaldehyde

### INSTALLATION

Installation Method	Glue down (Double Stick for Multi-level)
Suitable Substrates	Plywood, Particle Board, Concrete, existing timber - enquire for others
Joint Profile	Tongue and Groove (4 sides)
Suitable Applications	Flooring, Walls, Ceilings
Suitable Uses	Residential homes, hospitality, retail stores, restaurants, apartments
Underfloor Heating	• Hydronic Systems • Electric Systems set in screed (ensure screed suitable for UFH) - enquire for others
Wet Area Suitability	Contact the Forté team for information 0508 35 66 77

### TECHNICAL SPECIFICATIONS


Reaction to Fire (Floors)	Critical Flux 2.2kw/m <sup>2</sup>
Reaction to Fire (Walls and Ceilings)	Group 3 / Class Dfl-s1 (Group 1 can be achieved with intumescent coating)
Wear Layer Density	720kg/m <sup>3</sup>
Thermal Resistance	0.17 m <sup>2</sup> K/W
<u>Formaldehyde Emission</u>	
AS/NZS 2098.11	E0 (0.1mg/L)
<u>Slip Ratings</u>	
AS/NZS 4586 Wet Test	Classification F, Mean COF 0.70
AS/NZS 4586 Dry Test	Classification X, Pendulum Mean 40 BPN

### PACK INFORMATION

Pack Size	2.304m <sup>2</sup>
Pack Weight	27.80kg
Pieces per pack	3 full planks + 1 split plank

# Plank Profile

## INDUS PLANK

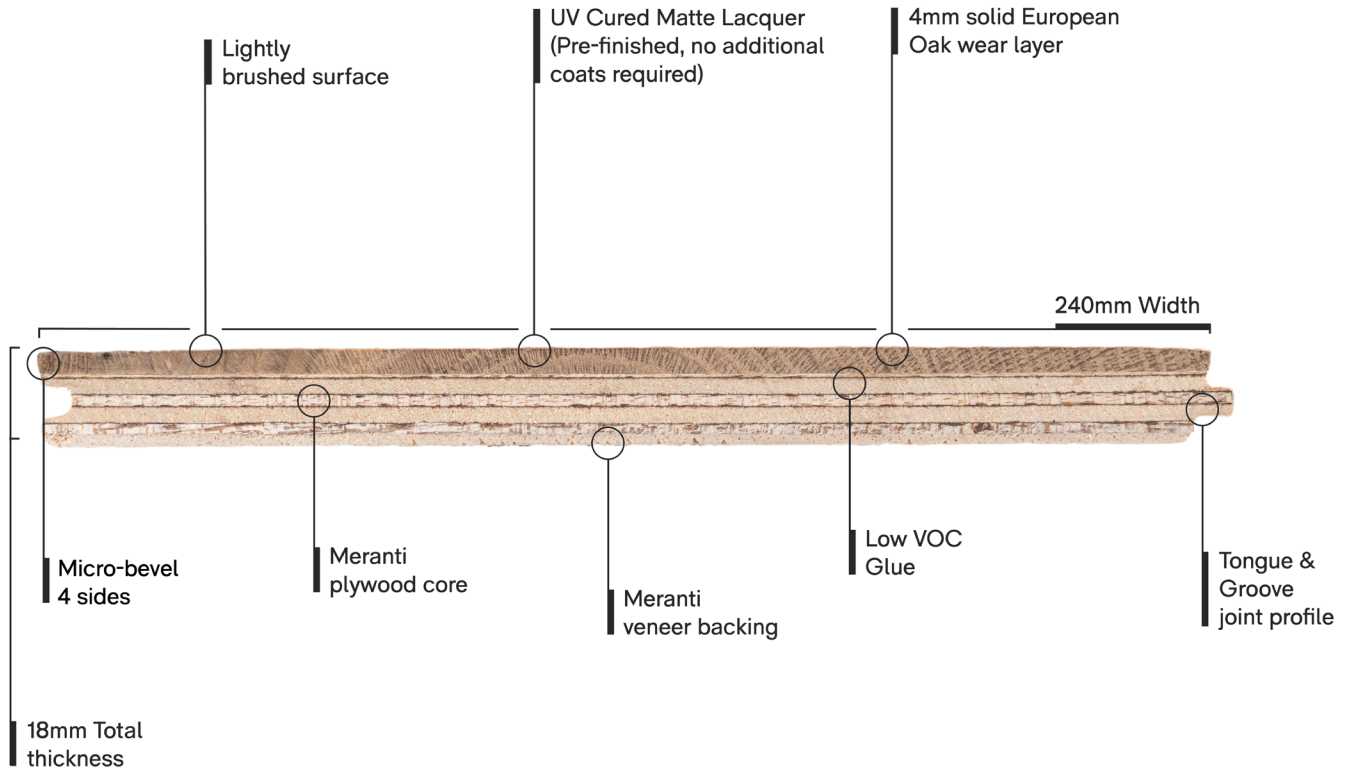

## INDUS – FEATURE GRADE



An Indus feature grade plank will typically contain unlimited natural colour variation. This grade allows for more frequent, larger knots and more sapwood should be expected throughout the planks. Cracks and checks will be present and are finished with filler.

# Care and Maintenance

## RESIDENTIAL AND COMMERCIAL CARE AND MAINTENANCE

---

Forté's Product Specialists have collated our care and maintenance recommendations to ensure your flooring looks like new for years to come. Residential and Commercial projects require different levels of care and maintenance. Visit [www.forte.co.nz/careandmaintenance](http://www.forte.co.nz/careandmaintenance)

# Structural Warranty

## INDUS 25 YEAR RESIDENTIAL STRUCTURAL WARRANTY

---

The Indus Collection comes with a full 25 year Residential Structural Warranty. For full warranty terms and conditions, please visit [www.forte.co.nz/warranties](http://www.forte.co.nz/warranties)

## INDUS 10 YEAR COMMERCIAL STRUCTURAL WARRANTY

---

The Indus Collection comes with a full 10 year Commercial Structural Warranty. For full warranty terms and conditions, please visit [www.forte.co.nz/warranties](http://www.forte.co.nz/warranties)

# Installation

## THE INDUS COLLECTION MUST BE INSTALLED BY A TRAINED PROFESSIONAL

---

Please ensure that you have read and understood the installation guidelines before proceeding to install Indus timber flooring. If you have any questions or concerns, please call the Forté technical team on 0508 35 66 77. Failure to adhere to the Forté Installation Guidelines may void your warranty.

For full installation guidelines, please visit [www.forte.co.nz/installation](http://www.forte.co.nz/installation)



## PRIME PLANK SPECIFICATION SHEET

Indus Collection Engineered T&G plank by Forté. 18mm thick, 240mm wide, 2400mm length. Glue down installation method onto substrate. Prime grade, pre-finished with UV Cured Matte Lacquer. CodeMark Certified.

### PRODUCT DETAILS

Collection	Indus
Product Type	Engineered Plank
Availability	Stocked
Total Thickness	18mm
Width	240mm
Length	2400mm
% of Shorts	Up to 25%
Wear Layer	4mm Solid European Oak
Core	Meranti Plywood
Backing	Meranti Veneer
Construction	Multi-layer Engineered
Re-sands	Up to 2 (approx. 1mm removed per re-sand)
Surface Texture	Lightly Brushed
Surface Sheen	Matte (8%)
Bevel	Micro-bevel 4 sides (0.7mm)
Status	Pre-finished (no additional coats required)
Finish	UV Cured Matte Lacquer (6 coats)
Species	European Oak
Wood Grade	Prime (refer page 2 for details)
Filler Colour	Dependant on colour, visit <a href="http://forte.co.nz">forte.co.nz</a> for accurate filler colour

The Indus Collection is also available in matching stair nosings, herringbone and feature grade planks

### STRUCTURAL WARRANTY

10 Year Commercial	For terms and conditions see
25 Year Residential	<a href="http://www.forte.co.nz/warranties">www.forte.co.nz/warranties</a>



Atacama



Mojave

### SUSTAINABILITY

Sustainably Sourced | FSC® available on request  
Low VOC | No added Formaldehyde

### INSTALLATION

Installation Method	Glue down (Double Stick for Multi-level)
Suitable Substrates	Plywood, Particle Board, Concrete, existing timber - enquire for others
Joint Profile	Tongue and Groove (4 sides)
Suitable Applications	Flooring, Walls, Ceilings
Suitable Uses	Residential homes, hospitality, retail stores, restaurants, apartments
Underfloor Heating	• Hydronic Systems • Electric Systems set in screed (ensure screed suitable for UFH) - enquire for others
Wet Area Suitability	Contact the Forté team for information 0508 35 66 77

### TECHNICAL SPECIFICATIONS


Reaction to Fire (Floors)	Critical Flux 2.2kw/m <sup>2</sup>
Reaction to Fire (Walls and Ceilings)	Group 3 / Class Dfl-s1 (Group 1 can be achieved with intumescent coating)
Formaldehyde Emission	
AS/NZS 2098.11	E0 (0.1mg/L)
Wear Layer Density	720kg/m <sup>3</sup>
Slip Ratings	
AS/NZS 4586 Wet Test	Classification F, Mean COF 0.70
AS/NZS 4586 Dry Test	Classification X, Pendulum Mean 40 BPN
Thermal Resistance	0.17 m <sup>2</sup> K/W

### PACK INFORMATION

Pack Size	2.304m <sup>2</sup>
Pack Weight	27.80kg
Pieces per pack	3 full planks + 1 split plank

# Plank Profile

## INDUS PLANK

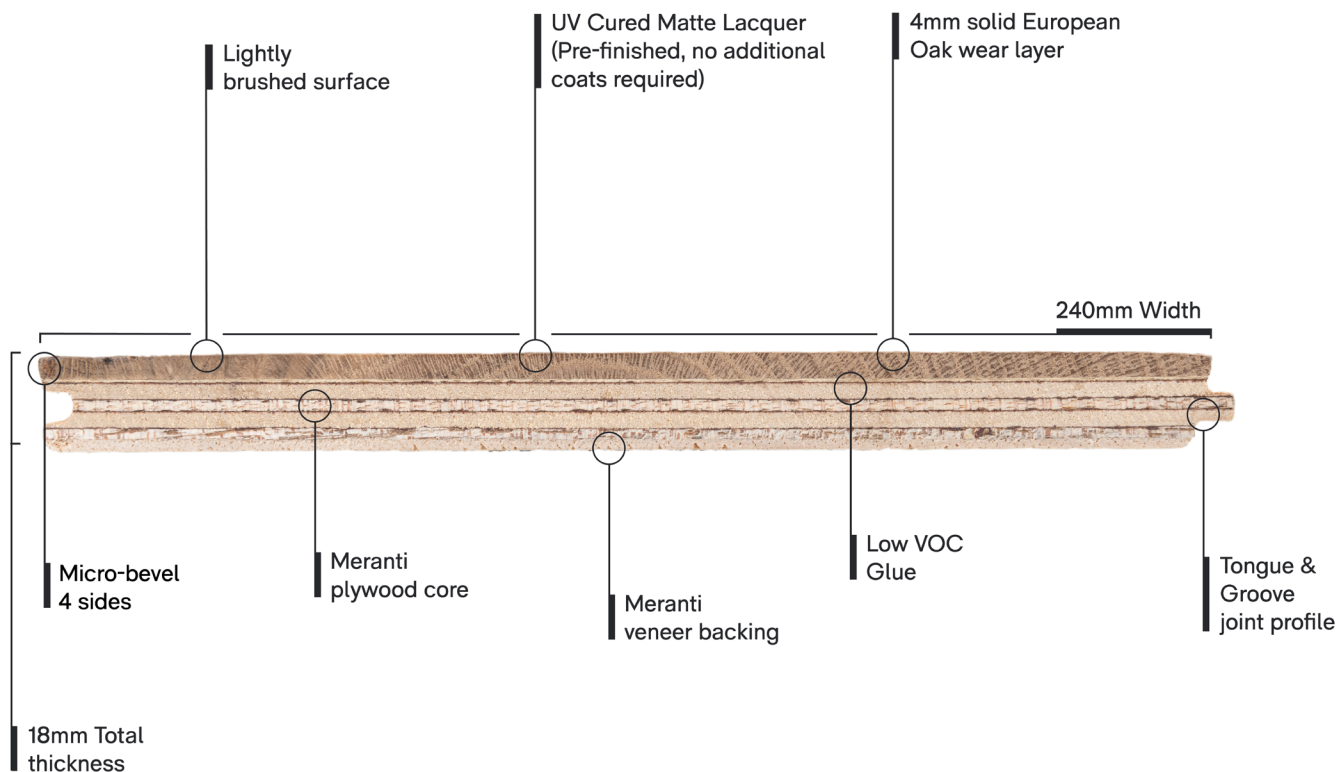

## INDUS – PRIME GRADE



An Indus prime grade plank will typically contain natural colour variation. This grade allows for infrequent, small sound knots that may be finished with filler. Minimal sapwood should be expected throughout the planks. Cracks and checks will not be present.

# Care and Maintenance

## RESIDENTIAL AND COMMERCIAL CARE AND MAINTENANCE

---

Forté's Product Specialists have collated our care and maintenance recommendations to ensure your flooring looks like new for years to come. Residential and Commercial projects require different levels of care and maintenance. Visit [www.forte.co.nz/careandmaintenance](http://www.forte.co.nz/careandmaintenance)

# Structural Warranty

## INDUS 25 YEAR RESIDENTIAL STRUCTURAL WARRANTY

---

The Indus Collection comes with a full 25 year Residential Structural Warranty. For full warranty terms and conditions, please visit [www.forte.co.nz/warranties](http://www.forte.co.nz/warranties)

## INDUS 10 YEAR COMMERCIAL STRUCTURAL WARRANTY

---

The Indus Collection comes with a full 10 year Commercial Structural Warranty. For full warranty terms and conditions, please visit [www.forte.co.nz/warranties](http://www.forte.co.nz/warranties)

# Installation

## THE INDUS COLLECTION MUST BE INSTALLED BY A TRAINED PROFESSIONAL

---

Please ensure that you have read and understood the installation guidelines before proceeding to install Indus timber flooring. If you have any questions or concerns, please call the Forté technical team on 0508 35 66 77. Failure to adhere to the Forté Installation Guidelines may void your warranty.

For full installation guidelines, please visit [www.forte.co.nz/installation](http://www.forte.co.nz/installation)



## HERRINGBONE SPECIFICATION SHEET

Indus Collection Engineered T&G herringbone by Forté. 18mm thick, 120mm wide, 600mm length. Glue down installation method onto substrate. Light feature grade, pre-finished with UV Cured Matte Lacquer. CodeMark Certified.

### PRODUCT DETAILS

Collection	Indus
Product Type	Herringbone
Availability	Stocked
Total Thickness	18mm
Width	120mm
Length	600mm
Wear Layer	4mm Solid European Oak
Core	Meranti Plywood
Backing Layer	Meranti Veneer
Construction	Multi-layer Engineered
Re-sands	1-2 (approx. 1mm removed per re-sand)
Surface Texture	Lightly Brushed
Surface Sheen	Matte (8%)
Edge Style	Micro bevelled 4 sides (0.7mm)
Status	Pre-finished (no additional coats required)
Finish	UV Cured Matte Lacquer (6 coats)
Species	European Oak
Wood Grade	Light Feature (refer page 2 for details)
Filler Colour	Dependant on colour, visit <a href="http://forte.co.nz">forte.co.nz</a> for accurate filler colour

The Indus Collection is also available in matching stair nosings, feature grade planks and selected prime grade planks


### STRUCTURAL WARRANTY

10 Year Commercial	For terms and conditions see
25 Year Residential	<a href="http://www.forte.co.nz/warranties">www.forte.co.nz/warranties</a>

Images are colour representation only



Atacama



Sahara



Patagonia

### SUSTAINABILITY

Sustainably Sourced | FSC® available on request  
Low VOC | No added Formaldehyde

### INSTALLATION

Installation Method	Glue down (Double Stick for Multi-level)
Suitable Substrates	Plywood, Particle Board, Concrete, existing timber - enquire for others
Joint Profile	Tongue and Groove (1 fixed tongue + 3 grooves. 1 loose tongue provided)
Suitable Applications	Flooring, Walls, Ceilings
Suitable Uses	Residential homes, hospitality, retail stores, restaurants, apartments
Underfloor Heating	• Hydronic Systems • Electric Systems set in screed (ensure screed suitable for UFH) - enquire for others
Wet Area Suitability	Contact the Forté team for information 0508 35 66 77

### TECHNICAL SPECIFICATIONS


Reaction to Fire (Floors)	Critical Flux 2.2kw/m <sup>2</sup>
Reaction to Fire (Walls and Ceilings)	Group 3 / Class Dfl-s1 (Group 1 can be achieved with intumescent coating)
<u>Formaldehyde Emission</u>	
AS/NZS 2098.11	E0 (0.1mg/L)
Wear Layer Density	720kg/m <sup>3</sup>
<u>Slip Ratings</u>	
AS/NZS 4586 Wet Test	Classification F, Mean COF 0.70
AS/NZS 4586 Dry Test	Classification X, Pendulum Mean 40 BPN
Thermal Resistance	0.17 m <sup>2</sup> K/W

### PACK INFORMATION

Pack Size	0.72m <sup>2</sup>
Pack Weight	8.80kg
Pieces per pack	10

# Plank Profile

## INDUS PLANK

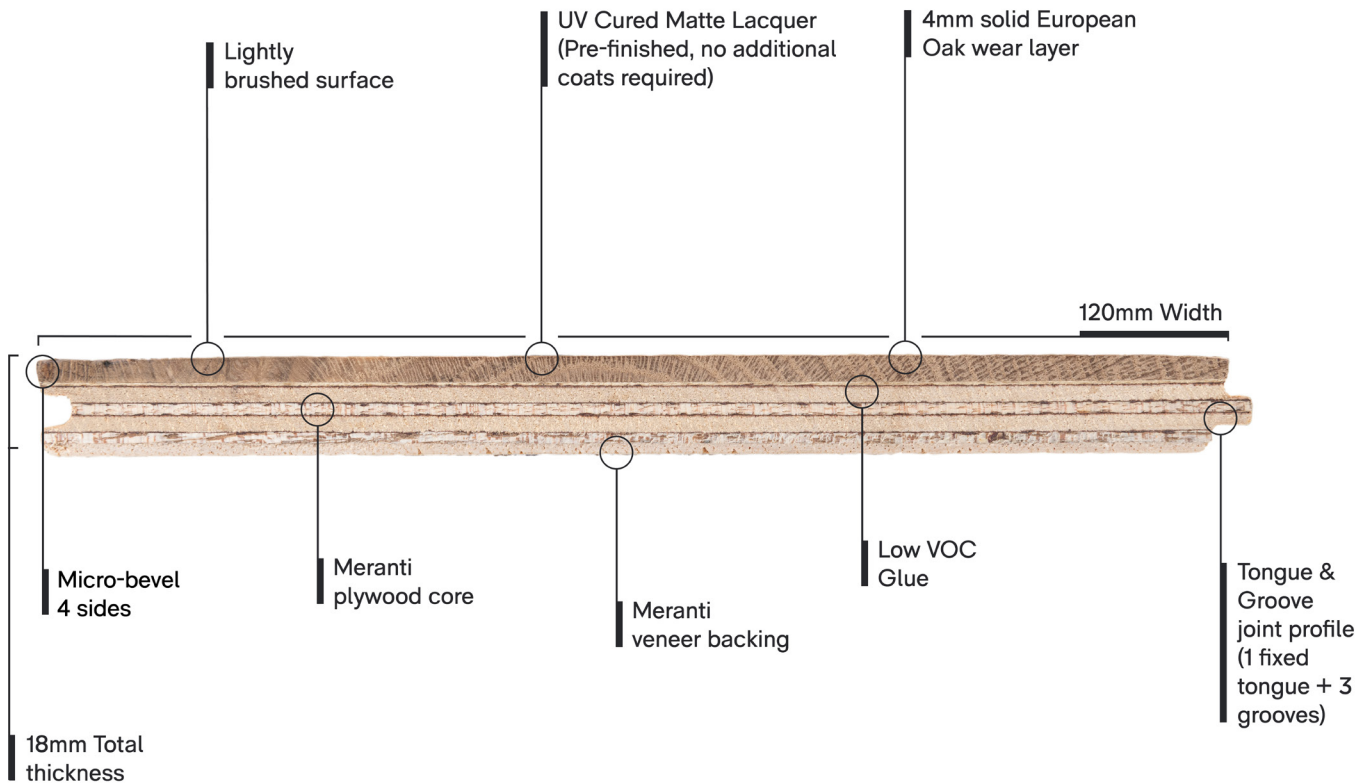

## INDUS – LIGHT FEATURE GRADE



An Indus light feature grade plank will typically contain unlimited natural colour variation. This grade allows for less frequent, smaller knots that will be finished with filler. Less sapwood should be expected throughout the planks. Cracks and checks will be not be present.



# Care and Maintenance

## RESIDENTIAL AND COMMERCIAL CARE AND MAINTENANCE

---

Forté's Product Specialists have collated our care and maintenance recommendations to ensure your flooring looks like new for years to come. Residential and Commercial projects require different levels of care and maintenance. Visit [www.forte.co.nz/careandmaintenance](http://www.forte.co.nz/careandmaintenance)

# Structural Warranty

## INDUS 25 YEAR RESIDENTIAL STRUCTURAL WARRANTY

---

The Indus Collection comes with a full 25 year Residential Structural Warranty. For full warranty terms and conditions, please visit [www.forte.co.nz/warranties](http://www.forte.co.nz/warranties)

## INDUS 10 YEAR COMMERCIAL STRUCTURAL WARRANTY

---

The Indus Collection comes with a full 10 year Commercial Structural Warranty. For full warranty terms and conditions, please visit [www.forte.co.nz/warranties](http://www.forte.co.nz/warranties)

# Installation

## THE INDUS COLLECTION MUST BE INSTALLED BY A TRAINED PROFESSIONAL

---

Please ensure that you have read and understood the installation guidelines before proceeding to install Indus timber flooring. If you have any questions or concerns, please call the Forté technical team on 0508 35 66 77. Failure to adhere to the Forté Installation Guidelines may void your warranty.

For full installation guidelines, please visit [www.forte.co.nz/installation](http://www.forte.co.nz/installation)

# /indus

## STAIR NOSING SPECIFICATION SHEET

### PRODUCT DETAILS

<b>Collection</b>	Indus
<b>Product Type</b>	Solid Oak Stair Nosing
<b>Availability</b>	Stocked
<b>Thickness (Tread)</b>	18mm
<b>Thickness (Face)</b>	36mm
<b>Width</b>	75mm
<b>Length</b>	1400mm
<b>Construction</b>	Solid
<b>Re-sands</b>	Up to 2 (approx. 1mm removed per re-sand)
<b>Surface Texture</b>	Lightly Brushed
<b>Surface Sheen</b>	Matte (8%)
<b>Edge Style</b>	Pencil rounded edge
<b>Status</b>	Pre-finished (no additional coats required)
<b>Finish</b>	UV Cured Matte Lacquer (6 coats)
<b>Species</b>	European Oak
<b>Wood Grade</b>	Light Feature
<b>Filler Colour</b>	Dependant on colour, visit forte.co.nz for accurate filler colour

The Indus Collection is also available in feature grade planks, selected prime grade planks and herringbone pattern

### STRUCTURAL WARRANTY

<b>5 Year Commercial</b>	For terms and conditions see
<b>25 Year Residential</b>	<a href="http://www.forte.co.nz/warranties">www.forte.co.nz/warranties</a>

Images are colour representation only



Mojave




Atacama



Kharan



Sahara



Colorado



Patagonia



Tanami

### INSTALLATION

<b>Installation Method</b>	Glue down or pin/nail
<b>Suitable Substrates</b>	Plywood, Particle Board, Concrete, existing timber - enquire for others
<b>Joint Profile</b>	Groove (on tread)
<b>Suitable Uses</b>	Stairs in residential homes, hospitality, retail stores, restaurants, apartments (in commercial staircases additional slip resistance may be required)

### PACK INFORMATION

<b>Supplied in</b>	1.4m lengths
<b>Nosing Weight</b>	1.4kg/length

# Care and Maintenance

## RESIDENTIAL AND COMMERCIAL CARE AND MAINTENANCE

---

Forté's Product Specialists have collated our care and maintenance recommendations to ensure your stair nosings looks like new for years to come. Residential and Commercial projects require different levels of care and maintenance. Visit [www.forte.co.nz/careandmaintenance](http://www.forte.co.nz/careandmaintenance)

# Structural Warranty

## INDUS 25 YEAR RESIDENTIAL STRUCTURAL WARRANTY

---

The Indus Collection comes with a full 25 year Residential Structural Warranty. For full warranty terms and conditions, please visit [www.forte.co.nz/warranties](http://www.forte.co.nz/warranties)

## INDUS 5 YEAR COMMERCIAL STRUCTURAL WARRANTY

---

The Indus Collection comes with a full 5 year Commercial Structural Warranty. For full warranty terms and conditions, please visit [www.forte.co.nz/warranties](http://www.forte.co.nz/warranties)

# Installation

## THE INDUS COLLECTION MUST BE INSTALLED BY A TRAINED PROFESSIONAL

---

Please ensure that you have read and understood the installation guidelines before proceeding to install Indus stair nosings. If you have any questions or concerns, please call the Forté technical team on 0508 35 66 77. Failure to adhere to the Forté Installation Guidelines may void your warranty.

For full installation guidelines, please visit [www.forte.co.nz/installation](http://www.forte.co.nz/installation)