

# smartfloor

## FEATURE PLANK SPECIFICATION SHEET

Smartfloor Collection Engineered T&G plank by Forté. 15mm thick, 190mm wide, 2200mm length. Glue Down installation method onto substrate. Feature grade, pre-finished with PureMatte Lacquer. CodeMark Certified.

### PRODUCT DETAILS

<b>Collection</b>	Smartfloor
<b>Product Type</b>	Engineered Plank
<b>Availability</b>	Stocked
<b>Total Thickness</b>	15mm
<b>Width</b>	190mm
<b>Length</b>	2200mm
<b>% of Shorts</b>	Up to 20%
<b>Wear Layer</b>	4mm Solid European Oak
<b>Core</b>	Plywood
<b>Construction</b>	2-layer Engineered
<b>Re-sands</b>	Approximately 2-3 (approx. 1mm removed per re-sand)
<b>Surface Texture</b>	Brushed
<b>Surface Sheen</b>	Matte
<b>Bevel</b>	Bevel 4 sides
<b>Status</b>	Pre-finished (no additional coats required)
<b>Finish</b>	PureMatte Lacquer
<b>Species</b>	European Oak
<b>Wood Grade</b>	Feature (refer page 2 for details)
<b>Filler Colour</b>	Dark

Selected colours of the Smartfloor Collection are available in: 220 W planks, herringbone, chevron and stair nosings to match

### STRUCTURAL WARRANTY

<b>10 Year Commercial</b>	For terms and conditions see
<b>25 Year Residential</b>	<a href="http://www.forte.co.nz/warranties">www.forte.co.nz/warranties</a>




Blond Oak Feature



Sandstone Oak



Natural Oak Feature



Marron Oak

### INSTALLATION

<b>Installation Method</b>	Glue down (Double Stick for Multi-level)
<b>Suitable Substrates</b>	Plywood, Particle Board, Concrete, existing timber - enquire for others
<b>Joint Profile</b>	Tongue and Groove (4 sides)
<b>Suitable Applications</b>	Flooring, Walls, Ceilings
<b>Suitable Uses</b>	Residential homes, hospitality, retail stores, restaurants, apartments
<b>Underfloor Heating</b>	• Hydronic Systems • Electric Systems set in screed (ensure screed suitable for UFH) - enquire for others
<b>Wet Area Suitability</b>	Contact the Forté team for information 0508 35 66 77

### TECHNICAL SPECIFICATIONS


<b>Reaction to Fire (Floors)</b>	Critical Flux 5.7kw/m <sup>2</sup>
<b>Reaction to Fire (Walls and Ceilings)</b>	Group 2-S / Class Cfl-s1
<b>Wear Layer Density</b>	650kg/m <sup>3</sup>
<b>Formaldehyde Emission</b>	E1
<b>Slip Ratings</b>	
<b>AS/NZS 4586 Wet Test</b>	Classification X (Medium) 41 BPN
<b>AS/NZS 4586 Dry Test</b>	Classification F, Mean COF 0.75

### PACK INFORMATION

<b>Pack Size</b>	2.09m <sup>2</sup>
<b>Pieces per pack</b>	4 full length planks + up to 1 split plank
<b>Pack Weight</b>	21kg

# Plank Profile

## SMARTFLOOR PLANK

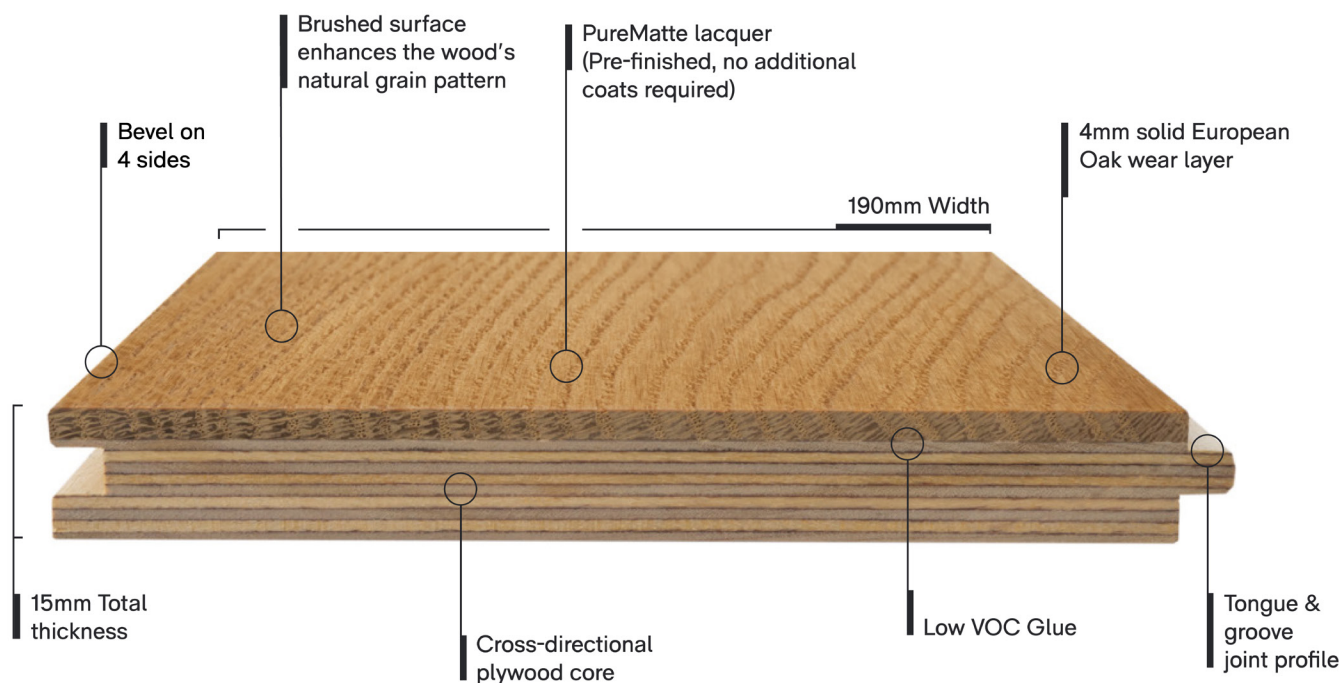

## SMARTFLOOR – FEATURE GRADE



A Smartfloor Feature grade plank will typically contain natural colour variation. This grade allows for frequent, larger knots and sapwood should be expected throughout the planks. Cracks and checks will be present and are finished with a dark shade of filler.

# Care and Maintenance

## RESIDENTIAL AND COMMERCIAL CARE AND MAINTENANCE

---

Forté's Product Specialists have collated our care and maintenance recommendations to ensure your flooring looks like new for years to come. Residential and Commercial projects require different levels of care and maintenance. Visit [www.forte.co.nz/careandmaintenance](http://www.forte.co.nz/careandmaintenance)

# Structural Warranty

## SMARTFLOOR 25 YEAR RESIDENTIAL STRUCTURAL WARRANTY

---

The Smartfloor Collection comes with a full 25 year Residential Structural Warranty. For full warranty terms and conditions, please visit [www.forte.co.nz/warranties](http://www.forte.co.nz/warranties)

## SMARTFLOOR 10 YEAR COMMERCIAL STRUCTURAL WARRANTY

---

The Smartfloor Collection comes with a full 10 year Commercial Structural Warranty. For full warranty terms and conditions, please visit [www.forte.co.nz/warranties](http://www.forte.co.nz/warranties)

# Installation

## THE SMARTFLOOR COLLECTION MUST BE INSTALLED BY A TRAINED PROFESSIONAL

---

Please ensure that you have read and understood the installation guidelines before proceeding to install Smartfloor timber flooring. If you have any questions or concerns, please call the Forté technical team on 0508 35 66 77. Failure to adhere to the Forté Installation Guidelines may void your warranty.

For full installation guidelines, please visit [www.forte.co.nz/installation](http://www.forte.co.nz/installation)

# /smartfloor

## LIGHT FEATURE PLANK SPECIFICATION SHEET

Smartfloor Collection Engineered T&G plank by Forté. 15mm thick, 190mm wide, 1900mm length. Glue Down installation method onto substrate. Light feature grade, pre-finished with PureMatte Lacquer. CodeMark Certified.


### PRODUCT DETAILS

Collection	Smartfloor
Product Type	Engineered Plank
Availability	Stocked
Total Thickness	15mm
Width	190mm
Length	1900mm
% of Shorts	Up to 20%
Wear Layer	4mm Solid European Oak
Core	Plywood
Construction	2-layer Engineered
Re-sands	Approximately 2-3 (approx. 1mm removed per re-sand)
Surface Texture	Brushed
Surface Sheen	Matte
Bevel	Bevel 4 sides
Status	Pre-finished (no additional coats required)
Finish	PureMatte Lacquer
Species	European Oak
Wood Grade	Light Feature (refer page 2 for details)
Filler Colour	Light


Selected colours of the Smartfloor Collection are available in: 220 W planks, herringbone, chevron and stair nosings to match

### STRUCTURE WARRANTY

10 Year Commercial	For terms and conditions see
25 Year Residential	<a href="http://www.forte.co.nz/warranties">www.forte.co.nz/warranties</a>

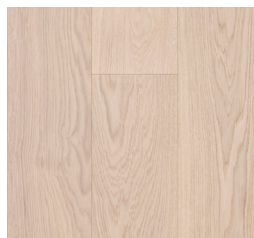

Blond Oak Light Feature

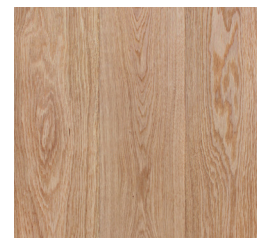

Natural Oak Light Feature

### INSTALLATION

Installation Method	Glue down (Double Stick for Multi-level)
Suitable Substrates	Plywood, Particle Board, Concrete, existing timber - enquire for others
Joint Profile	Tongue and Groove (4 sides)
Suitable Applications	Flooring, Walls, Ceilings
Suitable Uses	Residential homes, hospitality, retail stores, restaurants, apartments
Underfloor Heating	• Hydronic Systems • Electric Systems set in screed (ensure screed suitable for UFH) - enquire for others
Wet Area Suitability	Contact the Forté team for information 0508 35 66 77

### TECHNICAL SPECIFICATIONS


Reaction to Fire (Floors)	Critical Flux 5.7kw/m <sup>2</sup>
Reaction to Fire (Walls and Ceilings)	Group 2-S / Class Cfl-s1
Wear Layer Density	650kg/m <sup>3</sup>
Formaldehyde Emission	E1
<u>Slip Ratings</u>	
AS/NZS 4586 Wet Test	Classification X (Medium) 41 BPN
AS/NZS 4586 Dry Test	Classification F, Mean COF 0.75

### PACK INFORMATION

Pack Size	1.805m <sup>2</sup>
Pieces per pack	4 full length planks + up to 1 split plank
Pack Weight	18kg

# Plank Profile

## SMARTFLOOR PLANK

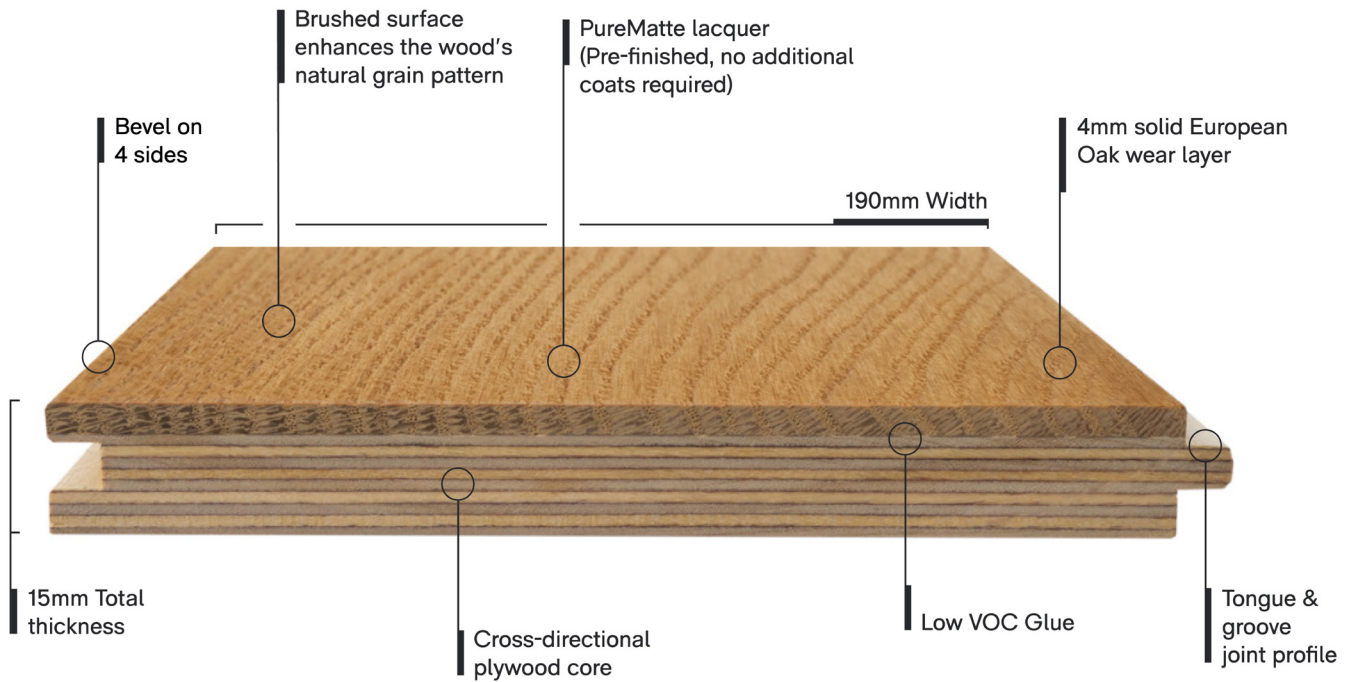

## SMARTFLOOR – LIGHT FEATURE GRADE



A Smartfloor Light Feature grade plank will consist of slight colour variation. Expect to see minimal sapwood throughout the planks as well as smaller and less frequent knots. Minimal cracks and checks will be present, some discreet features are finished with light filler to blend in with the timbers natural colour.



# Care and Maintenance

## RESIDENTIAL AND COMMERCIAL CARE AND MAINTENANCE

---

Forté's Product Specialists have collated our care and maintenance recommendations to ensure your flooring looks like new for years to come. Residential and Commercial projects require different levels of care and maintenance. Visit [www.forte.co.nz/careandmaintenance](http://www.forte.co.nz/careandmaintenance)

# Structure Warranty

## SMARTFLOOR 25 YEAR RESIDENTIAL STRUCTURAL WARRANTY

---

The Smartfloor Collection comes with a full 25 year Residential Structural Warranty. For full warranty terms and conditions, please visit [www.forte.co.nz/warranties](http://www.forte.co.nz/warranties)

## SMARTFLOOR 10 YEAR COMMERCIAL STRUCTURAL WARRANTY

---

The Smartfloor Collection comes with a full 10 year Commercial Structural Warranty. For full warranty terms and conditions, please visit [www.forte.co.nz/warranties](http://www.forte.co.nz/warranties)

# Installation

## THE SMARTFLOOR COLLECTION MUST BE INSTALLED BY A TRAINED PROFESSIONAL

---

Please ensure that you have read and understood the installation guidelines before proceeding to install Smartfloor timber flooring. If you have any questions or concerns, please call the Forté technical team on 0508 35 66 77. Failure to adhere to the Forté Installation Guidelines may void your warranty.

For full installation guidelines, please visit [www.forte.co.nz/installation](http://www.forte.co.nz/installation)

# /smartfloor

## 220 W FEATURE PLANK SPECIFICATION SHEET

Smartfloor Collection Engineered T&G plank by Forté. 15mm thick, 220mm wide, 2200mm length. Glue Down installation method onto substrate. Feature grade, pre-finished with PureMatte Lacquer. CodeMark Certified.

### PRODUCT DETAILS

Collection	Smartfloor
Product Type	Engineered Plank
Availability	Stocked
Total Thickness	15mm
Width	220mm
Length	2200mm
% of Shorts	Up to 20%
Wear Layer	4mm Solid European Oak
Core	Plywood
Construction	2-layer Engineered
Re-sands	Approximately 2-3 (approx. 1mm removed per re-sand)
Surface Texture	Brushed
Surface Sheen	Matte
Bevel	Bevel 4 sides
Status	Pre-finished (no additional coats required)
Finish	PureMatte Lacquer
Species	European Oak
Wood Grade	Feature (refer page 2 for details)
<u>Filler Colour</u>	
Clay Oak Feature	Light
Tawny Oak Feature	Cracks: Light / Knots: Dark

Selected colours of the Smartfloor Collection are available in: 190mm planks, herringbone, chevron and stair nosings to match

### STRUCTURAL WARRANTY

10 Year Commercial	For terms and conditions see
25 Year Residential	<a href="http://www.forte.co.nz/warranties">www.forte.co.nz/warranties</a>



Clay Oak Feature



Tawny Oak Feature

### INSTALLATION

Installation Method	Glue down (Double Stick for Multi-level)
Suitable Substrates	Plywood, Particle Board, Concrete, existing timber - enquire for others
Joint Profile	Tongue and Groove (4 sides)
Suitable Applications	Flooring, Walls, Ceilings
Suitable Uses	Residential homes, hospitality, retail stores, restaurants, apartments
Underfloor Heating	• Hydronic Systems • Electric Systems set in screed (ensure screed suitable for UFH) - enquire for others
Wet Area Suitability	Contact the Forté team for information 0508 35 66 77

### TECHNICAL SPECIFICATIONS


Reaction to Fire (Floors)	Critical Flux 5.7kw/m <sup>2</sup>
Reaction to Fire (Walls and Ceilings)	Group 2-S / Class Cfl-s1
Wear Layer Density	650kg/m <sup>3</sup>
Formaldehyde Emission	E1
<u>Slip Ratings</u>	
AS/NZS 4586 Wet Test	Classification X (Medium) 41 BPN
AS/NZS 4586 Dry Test	Classification F, Mean COF 0.75

### PACK INFORMATION

Pack Size	2.42m <sup>2</sup>
Pieces per pack	4 full length planks + up to 1 split plank
Pack Weight	21kg

# Plank Profile

## SMARTFLOOR PLANK

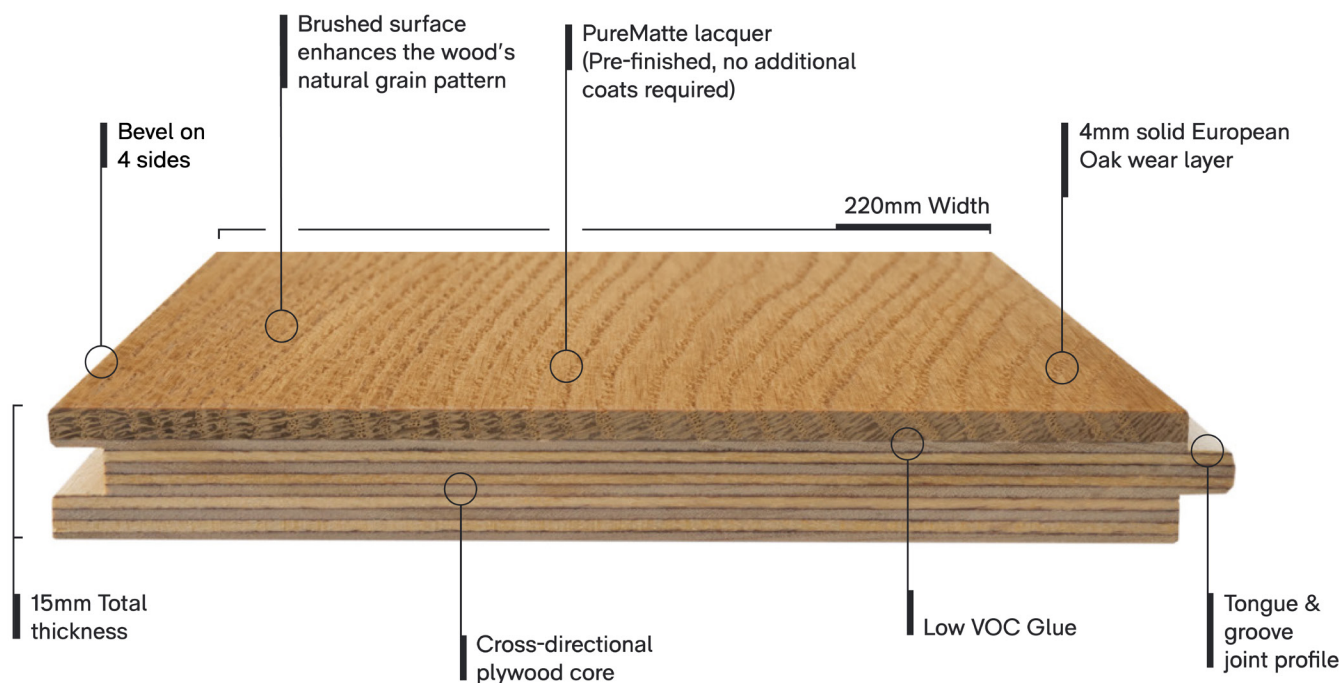

## SMARTFLOOR – FEATURE GRADE



A Smartfloor Feature grade plank will typically contain natural colour variation. This grade allows for frequent, larger knots and sapwood should be expected throughout the planks. Cracks and checks will be present and are finished with filler dependent on colour.



# Care and Maintenance

## RESIDENTIAL AND COMMERCIAL CARE AND MAINTENANCE

---

Forté's Product Specialists have collated our care and maintenance recommendations to ensure your flooring looks like new for years to come. Residential and Commercial projects require different levels of care and maintenance. Visit [www.forte.co.nz/careandmaintenance](http://www.forte.co.nz/careandmaintenance)

# Structural Warranty

## SMARTFLOOR 25 YEAR RESIDENTIAL STRUCTURAL WARRANTY

---

The Smartfloor Collection comes with a full 25 year Residential Structural Warranty. For full warranty terms and conditions, please visit [www.forte.co.nz/warranties](http://www.forte.co.nz/warranties)

## SMARTFLOOR 10 YEAR COMMERCIAL STRUCTURAL WARRANTY

---

The Smartfloor Collection comes with a full 10 year Commercial Structural Warranty. For full warranty terms and conditions, please visit [www.forte.co.nz/warranties](http://www.forte.co.nz/warranties)

# Installation

## THE SMARTFLOOR COLLECTION MUST BE INSTALLED BY A TRAINED PROFESSIONAL

---

Please ensure that you have read and understood the installation guidelines before proceeding to install Smartfloor timber flooring. If you have any questions or concerns, please call the Forté technical team on 0508 35 66 77. Failure to adhere to the Forté Installation Guidelines may void your warranty.

For full installation guidelines, please visit [www.forte.co.nz/installation](http://www.forte.co.nz/installation)

# /smartfloor

## 220 W LIGHT FEATURE PLANK SPECIFICATION SHEET



Clay Oak Light Feature

Smartfloor Collection Engineered T&G plank by Forté. 15mm thick, 220mm wide, 2200mm length. Glue Down installation method onto substrate. Light Feature grade, pre-finished with PureMatte Lacquer. CodeMark Certified.

### PRODUCT DETAILS

Collection	Smartfloor
Product Type	Engineered Plank
Availability	Stocked
Total Thickness	15mm
Width	220mm
Length	2200mm
% of Shorts	Up to 20%
Wear Layer	4mm Solid European Oak
Core	Plywood
Construction	2-layer Engineered
Re-sands	Approximately 2-3 (approx. 1mm removed per re-sand)
Surface Texture	Brushed
Surface Sheen	Matte
Bevel	Bevel 4 sides
Status	Pre-finished (no additional coats required)
Finish	PureMatte Lacquer
Species	European Oak
Wood Grade	Feature (refer page 2 for details)
Filler Colour	Light

Selected colours of the Smartfloor Collection are available in: 190mm planks, herringbone, chevron and stair nosings to match

### STRUCTURAL WARRANTY

10 Year Commercial	For terms and conditions see
25 Year Residential	<a href="http://www.forte.co.nz/warranties">www.forte.co.nz/warranties</a>

### INSTALLATION

Installation Method	Glue down (Double Stick for Multi-level)
Suitable Substrates	Plywood, Particle Board, Concrete, existing timber - enquire for others
Joint Profile	Tongue and Groove (4 sides)
Suitable Applications	Flooring, Walls, Ceilings
Suitable Uses	Residential homes, hospitality, retail stores, restaurants, apartments
Underfloor Heating	• Hydronic Systems • Electric Systems set in screed (ensure screed suitable for UFH) - enquire for others
Wet Area Suitability	Contact the Forté team for information 0508 35 66 77

### TECHNICAL SPECIFICATIONS


Reaction to Fire (Floors)	Critical Flux 5.7kw/m <sup>2</sup>
Reaction to Fire (Walls and Ceilings)	Group 2-S / Class Cfl-s1
Wear Layer Density	650kg/m <sup>3</sup>
Formaldehyde Emission	E1
Slip Ratings	
AS/NZS 4586 Wet Test	Classification X (Medium) 41 BPN
AS/NZS 4586 Dry Test	Classification F, Mean COF 0.75

### PACK INFORMATION

Pack Size	Feature: 2.42m <sup>2</sup>
Pieces per pack	4 full length planks + up to 1 split plank
Pack Weight	21kg

# Plank Profile

## SMARTFLOOR PLANK

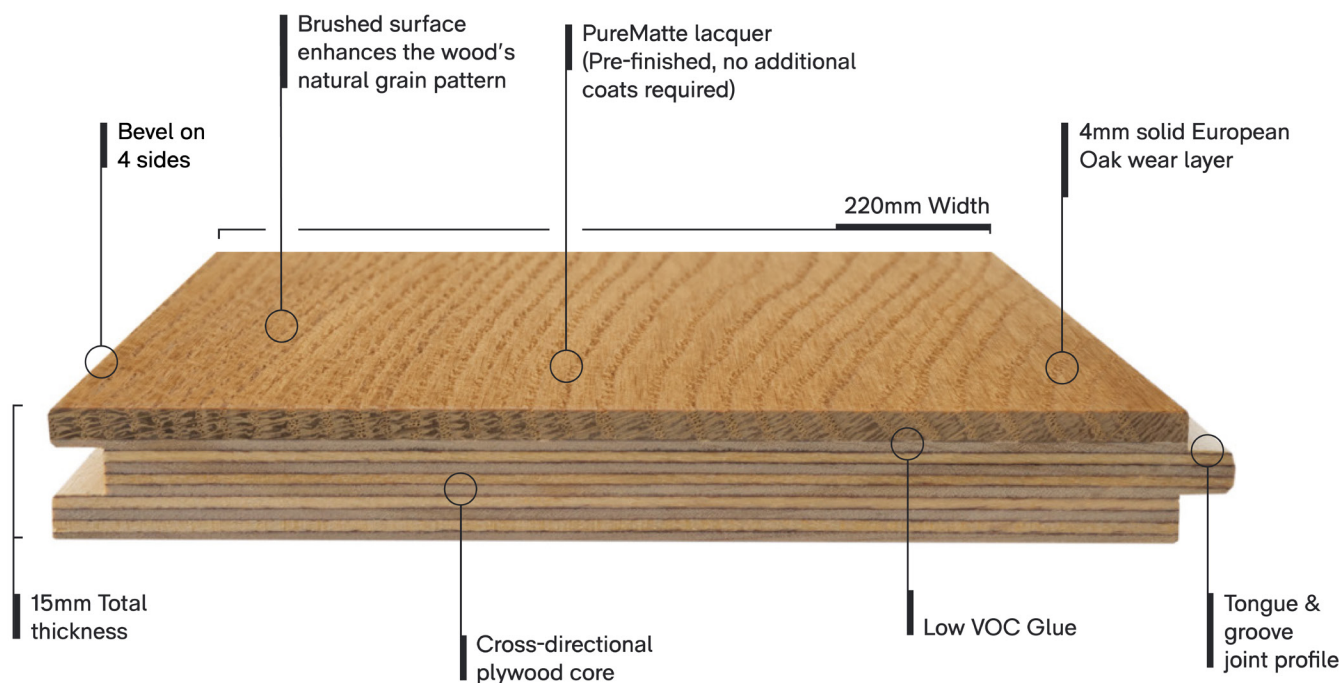

## SMARTFLOOR – LIGHT FEATURE GRADE



A Smartfloor Light Feature grade plank will consist of slight colour variation. Expect to see minimal sapwood throughout the planks as well as smaller and less frequent knots. Minimal cracks and checks will be present, some discreet features are finished with light filler to blend in with the timbers natural colour.

# Care and Maintenance

## RESIDENTIAL AND COMMERCIAL CARE AND MAINTENANCE

---

Forté's Product Specialists have collated our care and maintenance recommendations to ensure your flooring looks like new for years to come. Residential and Commercial projects require different levels of care and maintenance. Visit [www.forte.co.nz/careandmaintenance](http://www.forte.co.nz/careandmaintenance)

# Structural Warranty

## SMARTFLOOR 25 YEAR RESIDENTIAL STRUCTURAL WARRANTY

---

The Smartfloor Collection comes with a full 25 year Residential Structural Warranty. For full warranty terms and conditions, please visit [www.forte.co.nz/warranties](http://www.forte.co.nz/warranties)

## SMARTFLOOR 10 YEAR COMMERCIAL STRUCTURAL WARRANTY

---

The Smartfloor Collection comes with a full 10 year Commercial Structural Warranty. For full warranty terms and conditions, please visit [www.forte.co.nz/warranties](http://www.forte.co.nz/warranties)

# Installation

## THE SMARTFLOOR COLLECTION MUST BE INSTALLED BY A TRAINED PROFESSIONAL

---

Please ensure that you have read and understood the installation guidelines before proceeding to install Smartfloor timber flooring. If you have any questions or concerns, please call the Forté technical team on 0508 35 66 77. Failure to adhere to the Forté Installation Guidelines may void your warranty.

For full installation guidelines, please visit [www.forte.co.nz/installation](http://www.forte.co.nz/installation)

# /smartfloor

## HERRINGBONE FEATURE SPECIFICATION SHEET

Smartfloor Collection Engineered T&G Herringbone plank by Forté. 15mm thick, 120mm wide, in 600mm lengths. Glue Down installation method onto substrate. Feature grade, pre-finished with PureMatte Lacquer. CodeMark Certified.

### PRODUCT DETAILS

Collection	Smartfloor
Product Type	Engineered Plank
Availability	Stocked
Total Thickness	15mm
Width	120mm
Length	600mm
Wear Layer	4mm Solid European Oak
Core	Plywood
Construction	2-layer Engineered
Re-sands	Approximately 2-3 (approx. 1mm removed per re-sand)
Surface Texture	Brushed
Surface Sheen	Matte
Bevel	Bevel 4 sides
Status	Pre-finished (no additional coats required)
Finish	PureMatte Lacquer
Species	European Oak
Wood Grade	Feature (refer page 2 for details)
Filler Colour	Dark

Selected colours of the Smartfloor Collection are available in: Planks, herringbone, chevron and stair nosings to match

### STRUCTURAL WARRANTY

10 Year Commercial	For terms and conditions see
25 Year Residential	<a href="http://www.forte.co.nz/warranties">www.forte.co.nz/warranties</a>

Images are colour representation only



Marron Oak

### INSTALLATION

Installation Method	Glue down (Double Stick for Multi-level)
Suitable Substrates	Plywood, Particle Board, Concrete, existing timber - enquire for others
Joint Profile	Tongue and Groove (4 sides)
Suitable Applications	Flooring, Walls, Ceilings
Suitable Uses	Residential homes, hospitality, retail stores, restaurants, apartments
Underfloor Heating	• Hydronic Systems • Electric Systems set in screed (ensure screed suitable for UFH) - enquire for others
Wet Area Suitability	Contact the Forté team for information 0508 35 66 77

### TECHNICAL SPECIFICATIONS

Reaction to Fire (Floors)	Critical Flux 5.7kw/m <sup>2</sup>
Reaction to Fire (Walls and Ceilings)	Group 2-S / Class Cfl-s1
Wear Layer Density	650kg/m <sup>3</sup>
Formaldehyde Emission	E1
Slip Ratings	
AS/NZS 4586 Wet Test	Classification X (Medium) 41 BPN
AS/NZS 4586 Dry Test	Classification F, Mean COF 0.75

### PACK INFORMATION



Pack Size	0.864m <sup>2</sup>
Pieces per pack	6 x right + 6 x left
Pack Weight	9kg



# Herringbone Profile

## SMARTFLOOR HERRINGBONE

---

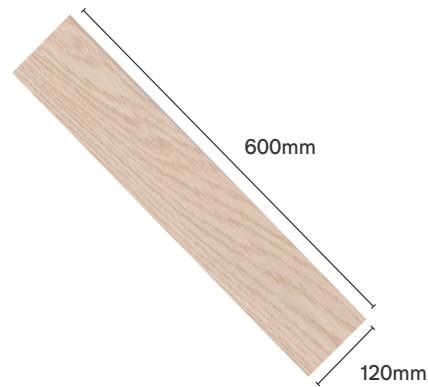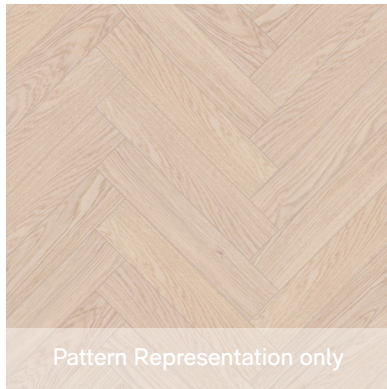

Plank is tongue and groove on all four sides.  
Product supplied in right and left planks.

## SMARTFLOOR – FEATURE GRADE

---



A Smartfloor Feature grade plank will typically contain natural colour variation. This grade allows for frequent, larger knots and sapwood should be expected throughout the planks. Cracks and checks will be present and are finished with a dark shade of filler.

# Care and Maintenance

## RESIDENTIAL AND COMMERCIAL CARE AND MAINTENANCE

---

Forté's Product Specialists have collated our care and maintenance recommendations to ensure your flooring looks like new for years to come. Residential and Commercial projects require different levels of care and maintenance. Visit [www.forte.co.nz/careandmaintenance](http://www.forte.co.nz/careandmaintenance)

# Structure Warranty

## SMARTFLOOR 25 YEAR RESIDENTIAL STRUCTURAL WARRANTY

---

The Smartfloor Collection comes with a full 25 year Residential Structural Warranty. For full warranty terms and conditions, please visit [www.forte.co.nz/warranties](http://www.forte.co.nz/warranties)

## SMARTFLOOR 10 YEAR COMMERCIAL STRUCTURAL WARRANTY

---

The Smartfloor Collection comes with a full 10 year Commercial Structural Warranty. For full warranty terms and conditions, please visit [www.forte.co.nz/warranties](http://www.forte.co.nz/warranties)

# Installation

## THE SMARTFLOOR COLLECTION MUST BE INSTALLED BY A TRAINED PROFESSIONAL

---

Please ensure that you have read and understood the installation guidelines before proceeding to install Smartfloor timber flooring. If you have any questions or concerns, please call the Forté technical team on 0508 35 66 77. Failure to adhere to the Forté Installation Guidelines may void your warranty.

For full installation guidelines, please visit [www.forte.co.nz/installation](http://www.forte.co.nz/installation)

# smartfloor

## HERRINGBONE LIGHT FEATURE SPECIFICATION SHEET

Smartfloor Collection Engineered T&G Herringbone plank by Forté. 15mm thick, 120mm wide, in 600mm lengths. Direct stick installation method onto substrate. Light feature grade, pre-finished with PureMatte Lacquer. CodeMark Certified.

### PRODUCT DETAILS


Collection	Smartfloor
Product Type	Engineered Plank
Availability	Stocked
Total Thickness	15mm
Width	120mm
Length	600mm
Wear Layer	4mm Solid European Oak
Core	Plywood
Construction	2-layer Engineered
Re-sands	Approximately 2-3 (approx. 1mm removed per re-sand)
Surface Texture	Brushed
Surface Sheen	Matte
Bevel	Bevel 4 sides
Status	Pre-finished (no additional coats required)
Finish	PureMatte Lacquer
Species	European Oak
Wood Grade	Light Feature (refer page 2 for details)
Filler Colour	Light

Selected colours of the Smartfloor Collection are available in: 190mm planks, chevron pattern and stair nosings to match

### STRUCTURAL WARRANTY

10 Year Commercial	For terms and conditions see
25 Year Residential	<a href="http://www.forte.co.nz/warranties">www.forte.co.nz/warranties</a>


Images are colour representation only




Blond Oak




Clay Oak



Natural Oak



Tawny Oak



Marron Oak

### INSTALLATION

Installation Method	Glue down (Double Stick for Multi-level)
Suitable Substrates	Plywood, Particle Board, Concrete, existing timber - enquire for others
Joint Profile	Tongue and Groove (4 sides)
Suitable Applications	Flooring, Walls, Ceilings
Suitable Uses	Residential homes, hospitality, retail stores, restaurants, apartments
Underfloor Heating	• Hydronic Systems • Electric Systems set in screed (ensure screed suitable for UFH) - enquire for others
Wet Area Suitability	Contact the Forté team for information 0508 35 66 77

### TECHNICAL SPECIFICATIONS

Reaction to Fire (Floors)	Critical Flux 5.7kw/m <sup>2</sup>
Reaction to Fire (Walls and Ceilings)	Group 2-S / Class Cfl-s1
Wear Layer Density	650kg/m <sup>3</sup>
Formaldehyde Emission	E1
<u>Slip Ratings</u>	
AS/NZS 4586 Wet Test	Classification X (Medium) 41 BPN
AS/NZS 4586 Dry Test	Classification F, Mean COF 0.75



### PACK INFORMATION

Pack Size	0.864m <sup>2</sup>
Pieces per pack	6 x right + 6 x left
Pack Weight	9kg

# Herringbone Profile

## SMARTFLOOR HERRINGBONE

---

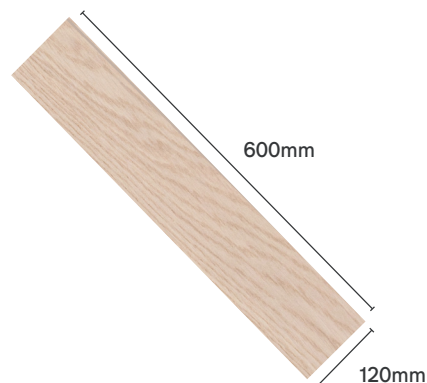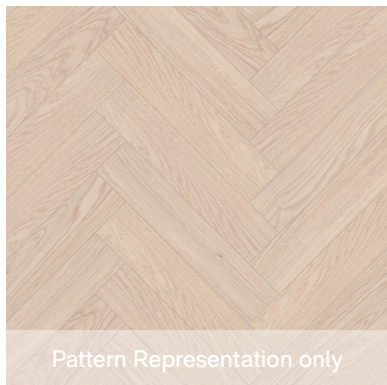

Plank is tongue and groove on all four sides.  
Product supplied in right and left planks.

## SMARTFLOOR – LIGHT FEATURE GRADE

---



A Smartfloor Light Feature grade plank will consist of slight colour variation. Expect to see minimal sapwood throughout the planks as well as smaller and less frequent knots. Minimal cracks and checks will be present, some discreet features are finished with light filler to blend in with the timbers natural colour.

# Care and Maintenance

## RESIDENTIAL AND COMMERCIAL CARE AND MAINTENANCE

---

Forté's Product Specialists have collated our care and maintenance recommendations to ensure your flooring looks like new for years to come. Residential and Commercial projects require different levels of care and maintenance. Visit [www.forte.co.nz/careandmaintenance](http://www.forte.co.nz/careandmaintenance)

# Structure Warranty

## SMARTFLOOR 25 YEAR RESIDENTIAL STRUCTURAL WARRANTY

---

The Smartfloor Collection comes with a full 25 year Residential Structural Warranty. For full warranty terms and conditions, please visit [www.forte.co.nz/warranties](http://www.forte.co.nz/warranties)

## SMARTFLOOR 10 YEAR COMMERCIAL STRUCTURAL WARRANTY

---

The Smartfloor Collection comes with a full 10 year Commercial Structural Warranty. For full warranty terms and conditions, please visit [www.forte.co.nz/warranties](http://www.forte.co.nz/warranties)

# Installation

## THE SMARTFLOOR COLLECTION MUST BE INSTALLED BY A TRAINED PROFESSIONAL

---

Please ensure that you have read and understood the installation guidelines before proceeding to install Smartfloor timber flooring. If you have any questions or concerns, please call the Forté technical team on 0508 35 66 77. Failure to adhere to the Forté Installation Guidelines may void your warranty.

For full installation guidelines, please visit [www.forte.co.nz/installation](http://www.forte.co.nz/installation)



# smartfloor

## CHEVRON LIGHT FEATURE SPECIFICATION SHEET

Smartfloor Collection Engineered T&G Chevron plank by Forté. 15mm thick, 120mm wide, in 600mm lengths. Glue Down installation method onto substrate. Light feature grade, pre-finished with PureMatte Lacquer. CodeMark Certified.

### PRODUCT DETAILS

<b>Collection</b>	Smartfloor
<b>Product Type</b>	Engineered Plank
<b>Availability</b>	Stocked
<b>Total Thickness</b>	15mm
<b>Width</b>	120mm
<b>Length</b>	600mm
<b>Wear Layer</b>	4mm Solid European Oak
<b>Core</b>	Plywood
<b>Construction</b>	2-layer Engineered
<b>Re-sands</b>	Approximately 2-3 (approx. 1mm removed per re-sand)
<b>Surface Texture</b>	Brushed
<b>Surface Sheen</b>	Matte
<b>Bevel</b>	Bevel 4 sides
<b>Status</b>	Pre-finished (no additional coats required)
<b>Finish</b>	PureMatte Lacquer
<b>Species</b>	European Oak
<b>Wood Grade</b>	Light Feature (refer page 2 for details)
<b>Filler Colour</b>	Light

Selected colours of the Smartfloor Collection are available in: 190mm planks, herringbone pattern and stair nosings to match

### STRUCTURAL WARRANTY

<b>10 Year Commercial</b>	For terms and conditions see
<b>25 Year Residential</b>	<a href="http://www.forte.co.nz/warranties">www.forte.co.nz/warranties</a>

Images are colour representation only



Clay Oak



Tawny Oak

### INSTALLATION

<b>Installation Method</b>	Glue down (Double Stick for Multi-level)
<b>Suitable Substrates</b>	Plywood, Particle Board, Concrete, existing timber - enquire for others
<b>Joint Profile</b>	Tongue and Groove (4 sides)
<b>Suitable Applications</b>	Flooring, Walls, Ceilings
<b>Suitable Uses</b>	Residential homes, hospitality, retail stores, restaurants, apartments
<b>Underfloor Heating</b>	• Hydronic Systems • Electric Systems set in screed (ensure screed suitable for UFH) - enquire for others
<b>Wet Area Suitability</b>	Contact the Forté team for information 0508 35 66 77

### TECHNICAL SPECIFICATIONS

<b>Reaction to Fire (Floors)</b>	Critical Flux 5.7kw/m <sup>2</sup>
<b>Reaction to Fire (Walls and Ceilings)</b>	Group 2-S / Class Cfl-s1
<b>Wear Layer Density</b>	650kg/m <sup>3</sup>
<b>Formaldehyde Emission</b>	E1
<b>Slip Ratings</b>	
<b>AS/NZS 4586 Wet Test</b>	Classification X (Medium) 41 BPN
<b>AS/NZS 4586 Dry Test</b>	Classification F, Mean COF 0.75


### PACK INFORMATION

<b>Pack Size</b>	0.864m <sup>2</sup>
<b>Pieces per pack</b>	6 x right + 6 x left
<b>Pack Weight</b>	9kg

# Chevron Profile

## SMARTFLOOR CHEVRON

---

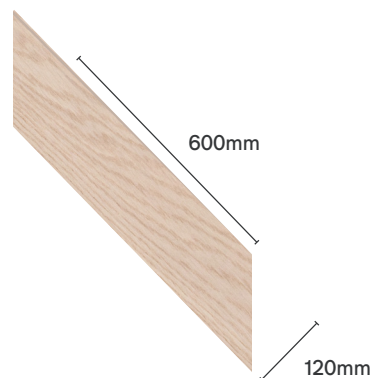

Plank is tongue and groove on all four sides.  
Product supplied in right and left planks.

## SMARTFLOOR – LIGHT FEATURE GRADE

---



A Smartfloor Light Feature grade plank will consist of slight colour variation. Expect to see minimal sapwood throughout the planks as well as smaller and less frequent knots. Minimal cracks and checks will be present, some discreet features are finished with light filler to blend in with the timbers natural colour.

# Care and Maintenance

## RESIDENTIAL AND COMMERCIAL CARE AND MAINTENANCE

---

Forté's Product Specialists have collated our care and maintenance recommendations to ensure your flooring looks like new for years to come. Residential and Commercial projects require different levels of care and maintenance. Visit [www.forte.co.nz/careandmaintenance](http://www.forte.co.nz/careandmaintenance)

# Structure Warranty

## SMARTFLOOR 25 YEAR RESIDENTIAL STRUCTURAL WARRANTY

---

The Smartfloor Collection comes with a full 25 year Residential Structural Warranty. For full warranty terms and conditions, please visit [www.forte.co.nz/warranties](http://www.forte.co.nz/warranties)

## SMARTFLOOR 10 YEAR COMMERCIAL STRUCTURAL WARRANTY

---

The Smartfloor Collection comes with a full 10 year Commercial Structural Warranty. For full warranty terms and conditions, please visit [www.forte.co.nz/warranties](http://www.forte.co.nz/warranties)

# Installation

## THE SMARTFLOOR COLLECTION MUST BE INSTALLED BY A TRAINED PROFESSIONAL

---

Please ensure that you have read and understood the installation guidelines before proceeding to install Smartfloor timber flooring. If you have any questions or concerns, please call the Forté technical team on 0508 35 66 77. Failure to adhere to the Forté Installation Guidelines may void your warranty.

For full installation guidelines, please visit [www.forte.co.nz/installation](http://www.forte.co.nz/installation)