

AOS01 + SHIELD

ANCHOR POINT FOR TRAPEZOIDAL METAL ROOFS



UNOBTRUSIVE

It ensures a reduced visual impact thanks to its small size.

PACKAGING



Supplied complete with mounting rivets and cellular rubber seals for perfect waterproofing.



LOAD DIRECTION



TYPES OF APPLICATION

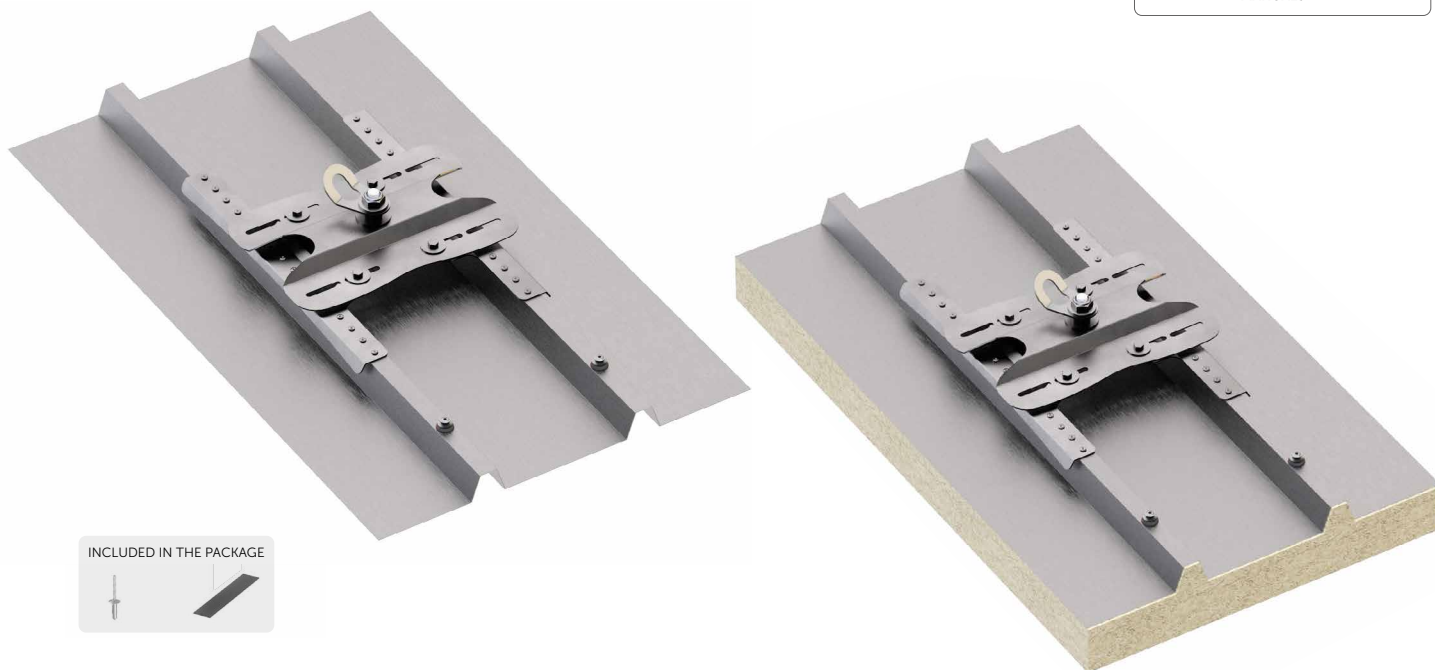

INCLUDED IN THE PACKAGE



TECHNICAL DATA*

substructure	minimum thickness	fastening systems included	substructure	minimum thickness	fastening systems included
Fe	0.4 mm	rivet 6,3 x 20,2 mm with EPDM washer (x 32)	Al	0,6 mm	rivet 6,3 x 20,2 mm with EPDM washer (x 32)
Fe	0.4 mm		Al	0,6 mm	

* The values indicated are the result of experimental tests carried out under the supervision of third parties in accordance with the standard referred to. For a calculation report with minimum distances according to the relevant standard requirements, the substructure must be checked by a qualified engineer before installation.

SHIELD | CODES AND DIMENSIONS



CODE	material	B	H	L	pcs	
		[mm]	[mm]	[mm]		
SHIELD	AISI 304 stainless steel grade 1.4301	180-420	85	476	1	
AOS01	AISI 304 stainless steel grade 1.4301	60	-	98	1	
RIV6320	rivets 6,3 x 20,2 mm with EPDM washer	-	-	-	33	

AOS01 + SHIELD 2

ANCHOR POINT FOR TRAPEZOIDAL METAL ROOFS



FAST

Easy installation because it is configured as a single plate.

COMPLETE



The package includes fasteners and cellular rubber seals, to ensure waterproofing.



LOAD DIRECTION



TYPES OF APPLICATION

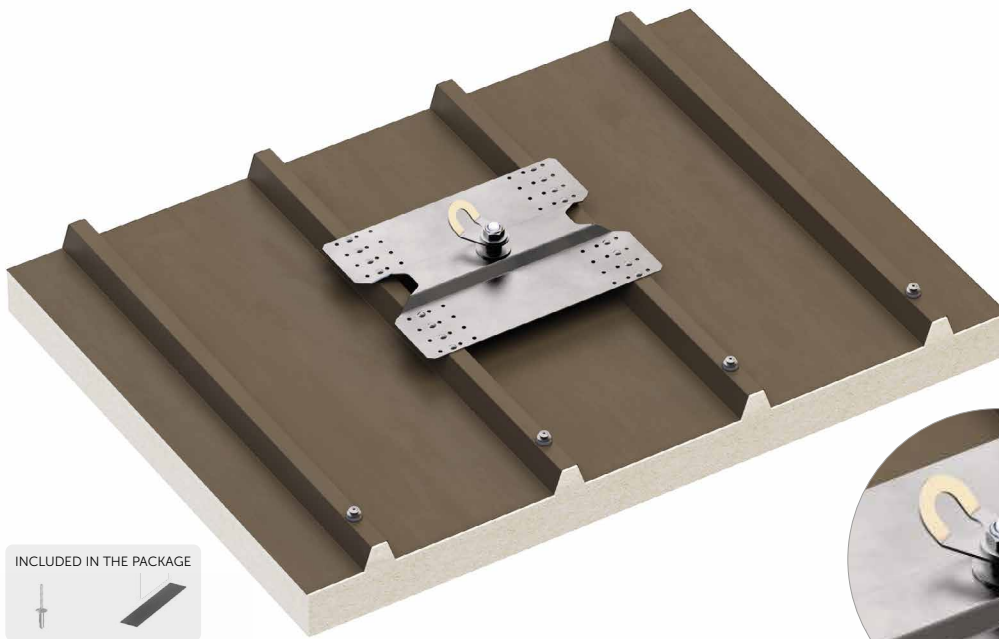

TECHNICAL DATA*

substructure	minimum thickness	fastening systems included
Fe	0,5 mm	rivet 6,3 x 20,2 mm with EPDM washer (x 16)
Fe	0,5 mm	

substructure	minimum thickness	fastening systems included
Al	1 mm	rivet 6,3 x 20,2 mm with EPDM washer (x 16)
Al	0,7 mm	

* The values indicated are the result of experimental tests carried out under the supervision of third parties in accordance with the standard referred to. For a calculation report with minimum distances according to the relevant standard requirements, the substructure must be checked by a qualified engineer before installation.

SHIELD 2 | CODES AND DIMENSIONS



CODE	material	B	H	L	pcs	
		[mm]	[mm]	[mm]		
SHIELD2	AISI 304 stainless steel grade 1.4301	420	65	322	1	
AOS01	AISI 304 stainless steel grade 1.4301	60	-	98	1	
RIV6320	rivets 6,3 x 20,2 mm with EPDM washer	-	-	-	33	

SIANK

ANCHOR POINT FOR STANDING SEAM METAL ROOFS



EFFICIENT

The system is fixed to a single seam of the sheet using a few tools.

UNOBTRUSIVE



Device fixed to the seam by means of a single clamp, without the need to drill holes in the metal sheet, guaranteeing its impermeability and durability.




LOAD DIRECTION



TYPES OF APPLICATION

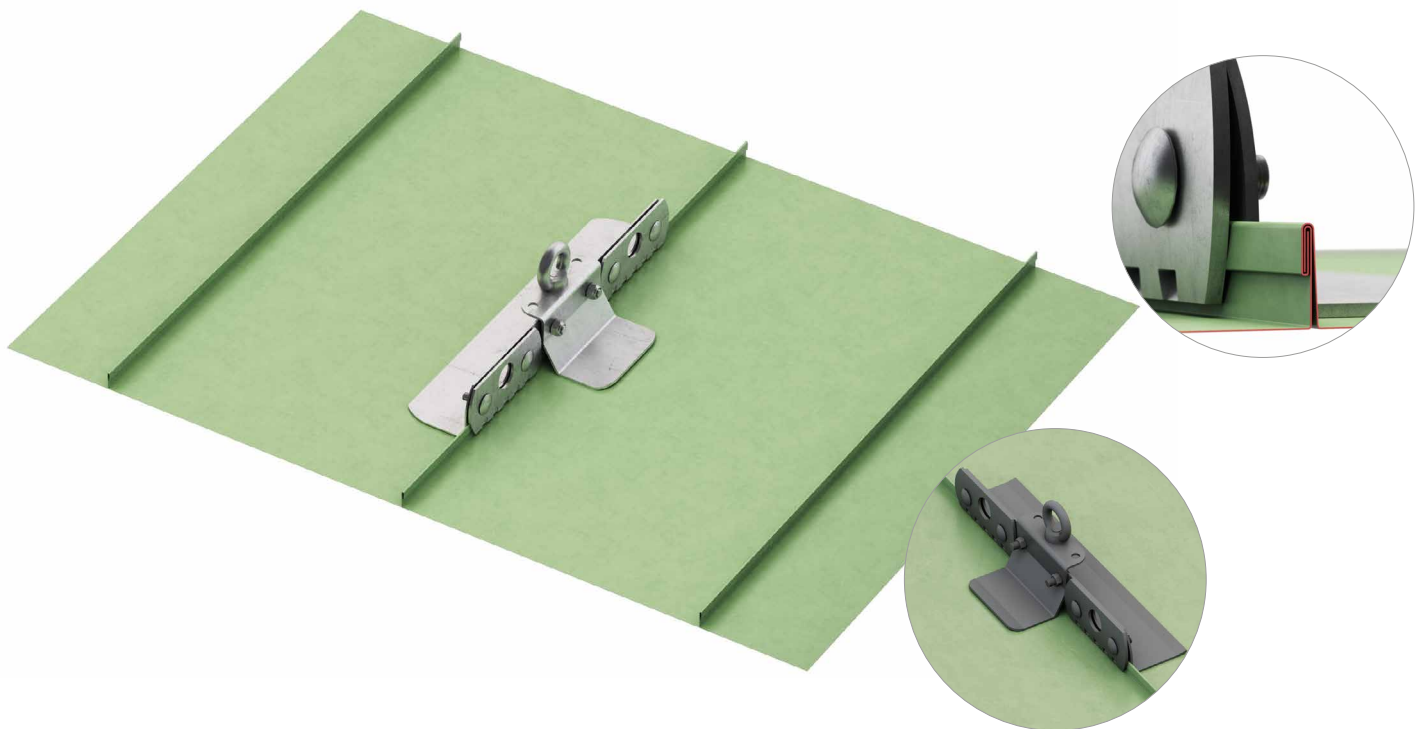

TECHNICAL DATA*

substructure	minimum thickness
 Fe	0,5 mm
 Al	0,7 mm
 Cu	0,5 mm

substructure	minimum thickness
 Zn - Ti	0,7 mm
 stainless steel	0.4 mm

* The values indicated are the result of experimental tests carried out under the supervision of third parties in accordance with the standard referred to. For a calculation report with minimum distances according to the relevant standard requirements, the substructure must be checked by a qualified engineer before installation.

CODES AND DIMENSIONS

CODE	description	material	B	H	L	pcs
			[mm]	[mm]	[mm]	
SIANK	anchor point for seaming 25 mm	AISI 304 stainless steel grade 1.4301	163	130	400	1
SIANK65	anchor point for seaming 65 mm	AISI 304 stainless steel grade 1.4301	104	163	400	1
SIANKA	anthracite-colour anchorage point for seaming 25 mm	AISI 304 stainless steel grade 1.4301	163	130	400	1
SIANKB	brown anchorage point for seaming 25 mm	AISI 304 stainless steel grade 1.4301	163	130	400	1

