

Natural Creations[™] EarthCuts

Juxury Vinyl Tile

Natural Creations[™] EarthCuts features luxurious stone look tiles available in a range of formats and thicknesses to suit your space, including terrazzo and concrete visuals. Thoughtfully designed for modern spaces including residential and commercial environments.

- Features & Benefits

Natural Creations[™] EarthCuts meets high performance criteria on a range of applications and incorporates a high density interlayer and a protective PUR coating that delivers outstanding durability and protection. Natural Creations[™] EarthCuts is scratch, scuff and slip resistant (P3 and R10) and highly durable for residential and commercial wear (0.55mm wear layer).



Durable Domestic Heavy Duty (23) and Commercial Heavy Duty (33) offering long term durability.



Low Maintenance Easy to clean PUR coating for low maintenance and resistance to spills and scratches.



Pet Friendly Resistant to scratches, stains, and spills - suitable for all household pets.^

Waterproof Surface Not affected by spills, for water prone areas.^



Kid Friendly Low maintenance and suitable for young children and families.



Office Suitable Suitable for residential and commercial office spaces.



Residential Warranty 25 year residential warranty*



Stain Resistant PUR coating for improved stain resistance, ideal for kitchens.






Natural Creations™ EarthCuts

Firenze Terrazzo

An intricate terrazzo stone design, perfect for both traditional and modern architectural designs.




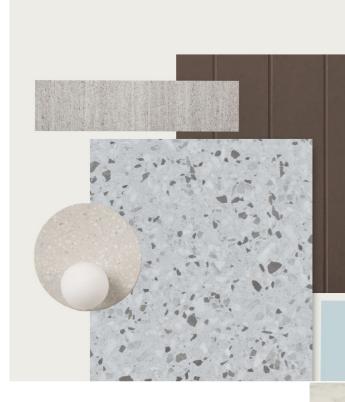





Natural Creations™ EarthCuts 457 x 457 x 2.5 mm | 914 x 457 x 2.5 mm

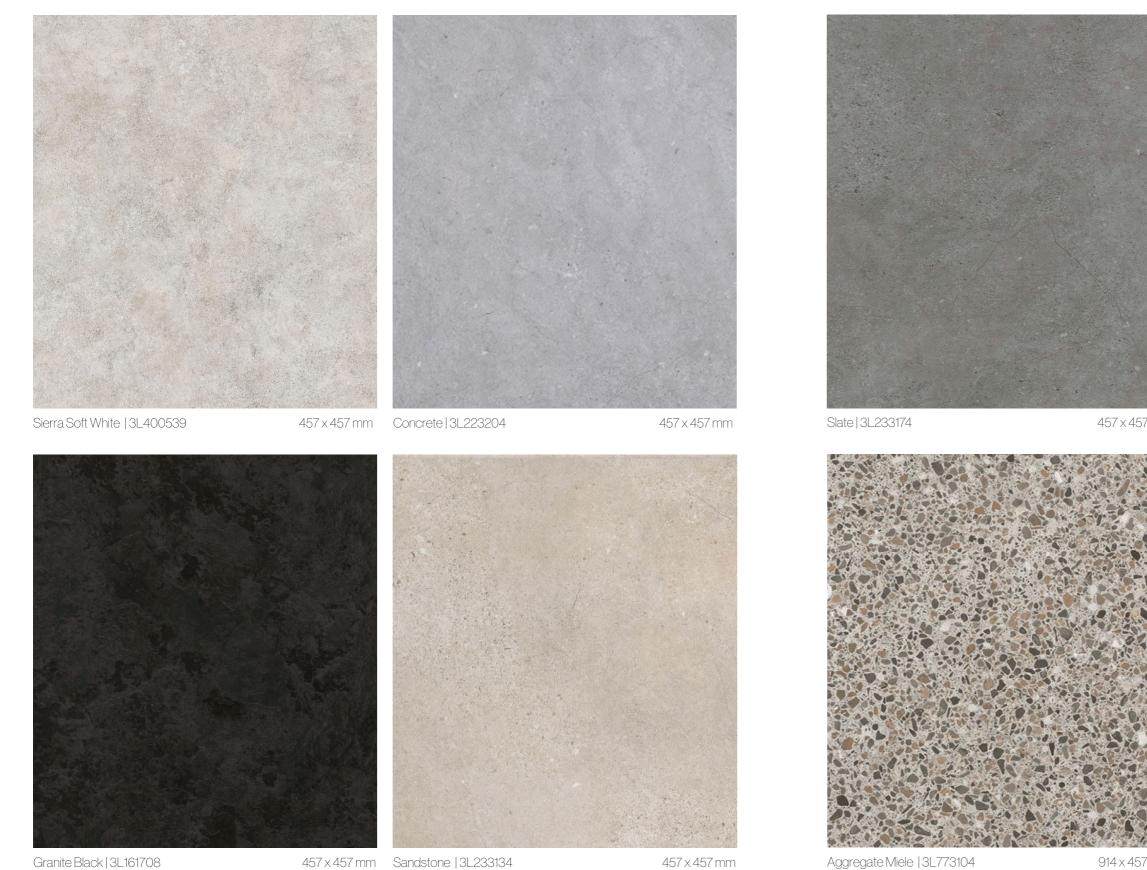

Granite Black | 3L161708

457 x 457 mm Sandstone | 3L233134

457 x 457 mm

Colour swatches may vary between digital brochure to real life product and are to be used as a guide only. It is recommended you view the actual product at a store – visit our <u>Store Locator</u>.



457 x 457 mm Firenze Terrazzo | 3L258114

914 x 457 mm



914 x 457 mm Genova Terrazzo | 3L225854

914 x 457 mm

Product Classification			Product Testing		Standard	Requirement	Result
Type of floor covering	EN ISO 10582	Luxury Vinyl Tile	Slip	Wet Pendulum	AS4586	-	P3
Classification	ISO 10874	Domestic Heavy Duty (23)	Fire	Critical radiant flux	AS ISO 9239-1	≥4.5kW/m²	9.7kW/m2
		Commercial Heavy Duty (33)		Smoke development rate	AS ISO 9239-1	≤750%.minutes	87%.minutes
		Industrial General Duty (42)	Acoustic	Impact sound insulation	ISO 10140-3	≤62dB	Ln,w = 43dB (5 Star)
				(150mm concrete with 3mm underlay and drop ceiling)	ISO 717-2		
Product Structure			Surface	Abrasion	EN660-2	-	Group T
Dimensions	457 x 457mm (Stone) ; 914 x 457	7mm (Terrazzo)		Martindale (wear resistance)	EN16094	MSR-B2	MSR-B2
Surface treatment	PUR			UV adhesion	-	≥2	2
Wear layer (mm)	0.55 mm			Colour fastness	ISO 105-B02	≥6	6
Bevel	Yes		Core	Dimensional tolerance	EN427	Length ± 0.30mm	Length 0.02mm
Installation	Glue down as per current Australian Standard AS1884					Width ± 0.12mm	Width 0.06mm
				Peel strength	ISO 24345	>50N	93.65N
Packaging	Stone	Terrazzo		Shrink-vertical % (80°C 6hr)	ISO 23999	≤ 0.25%	0.13%
Planks/carton	16	8		Shrink-horizontal % (80°C 6hr)	ISO 23999	≤ 0.25%	0.07%
m2/carton	3.34	3.34		Curling (80°C 6hr)	ISO 23999	≤ 2 mm	0.3mm
Kg/carton	14.5	14.7		Residual indentation	ISO 24343	≤0.10 mm	0.09mm

Sustainability

TVOC emissions

Product Structure

Compliant low emitting VOC emissions

Collection





Sierra Soft White | 3L400539


Concrete | 3L223204





Slate | 3L233174

Firenze Terrazzo | 3L258114

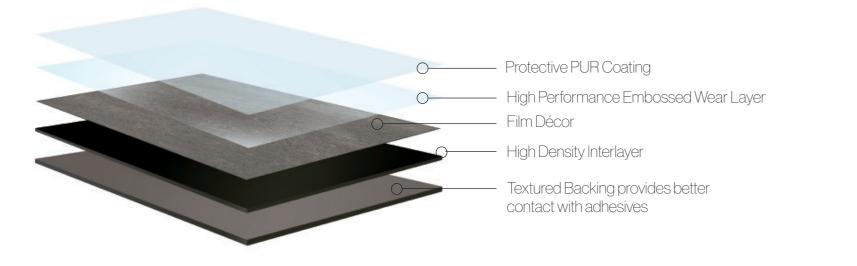



Granite Black | 3L161708



Aggregate Miele | 3L773104



Sandstone | 3L233134



Genova Terrazzo | 3L225854

Learn more

www.armstrongflooring.au/earthcuts



ArmstrongFlooring[®]

29-39 Mills Road, Braeside VIC 3195

1800 632 624 customerservices@armstrongflooring.au <u>www.armstrongflooring.au</u>