


## Benefits

- Ideal for open plan spaces where control of ambient noise is an important consideration
- Excellent sound absorption for reduced reverberation and quieter spaces
- Sustainable Contribution
  - Global GreenTag<sup>CERT</sup>™ GreenRate™ Level A Certified for Green Star™
- Durable, reinforced, scratch resistant face
- New smooth finish with high light reflective finish for a brighter space
- Broad range of edge profiles
- Humiguard™ Plus RH99 Sag Resistance
- ISO 4 Clean Room Performance

## Application Areas

- Open Plan offices
- Cafeterias
- Libraries
- Auditoriums
- Canteens
- Nurses Stations
- Lounges
- Cinemas/Theatres
- Restaurants

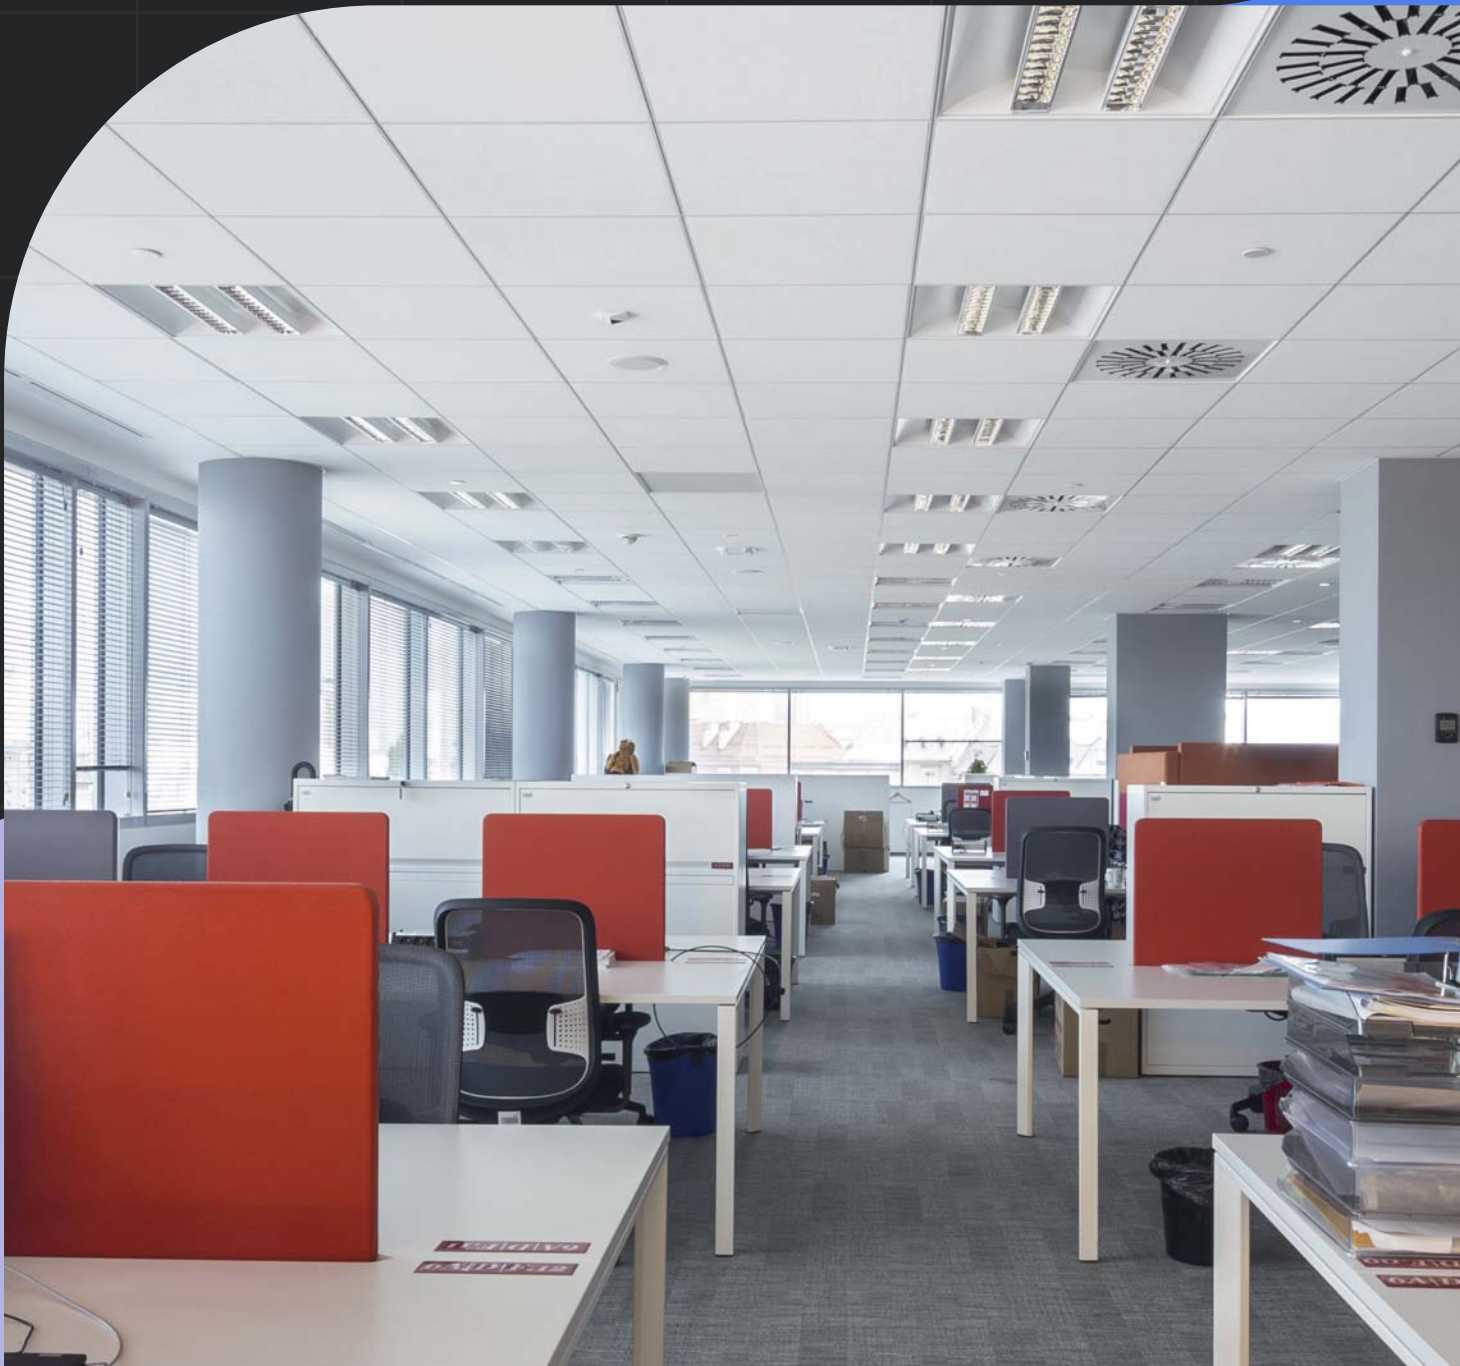

# Ultima™ OP



RH99 Humidity Resistant



Scratch Resistant



Product Handling Durability



Cleanable



ISO 4 Clean Room ISO 14644-1



Anti mould and mildew



Very Low Emissions



Recycled Content EN ISO 14021



Light Reflectance



Acoustical Comfort

Panel Options	BOARD	TEGULAR 24/90	TEGULAR 15/90
	Prelude™ 24mm Grid	Prelude 24mm Grid	Suprafine™ 15mm Grid Silhouette™ 15mm Grid
600 x 600 x 15mm	1120G*	1122G*	1124G*
1200 x 600 x 15mm	1121G**	1123G*	1125G*
600 x 600 x 20mm	7682G*	7678G*	7685G*
1200 x 600 x 20mm	7684G*	7680G*	7687G*

Notes: \* Made to order product, subject to minimum order quantities and lead time.

\*\* 1200 mm x 600mm x 15mm Square Edge Board available in Black, subject to minimum order quantities and lead time.




EN ISO 354 & EN ISO 11654

Thickness	NRC	125	250	500	1000	2000	4000	Hz
15mm	0.85	0.55	0.75	0.75	0.90	0.95	1.00	$\alpha_p$
20mm	0.95	0.50	0.80	0.95	0.95	1.00	1.00	$\alpha_p$



EN ISO 10848-2 & EN ISO 717-1

**CAC**  
29 dB (15mm)  
26 dB (20mm)

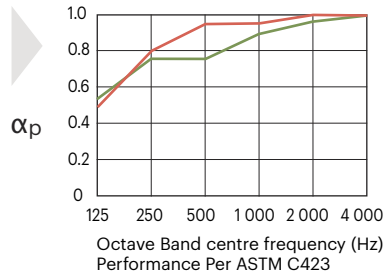

Humiguard™ Plus Sag Resistance (RH99% at 0°C – 49°C)  
Refer to website for additional information



Conforms with NCC Spec. C1.10 as tested to AS 5637.1:2015 – Group 1, and ISO 5660 – Group 1 – S



Thermal Insulation (R- Value)  
0.40 m<sup>2</sup>K/W



2.9 kg/m<sup>2</sup> (15mm), 3.5 kg/m<sup>2</sup> (20mm)

#### Material

Wet-formed mineral fibre with durable acoustically transparent membrane

#### Surface Finish

Factory applied acrylic paint

#### Backloading Recommendation

Contact your local Armstrong Ceilings representative

#### Suspension Systems

PeakForm™ Steel options above, with ARMSTRONG BLUE TONGUE™ Aluminium upon request

#### Green Star™: Potential contribution Interiors v1.3 / Design & As Built v1.3

Indoor Environmental Quality				Materials	
Credit 9/10 ACOUSTIC COMFORT	Credit 10.2A/11.2A LIGHTING COMFORT SURFACE ILLUMINANCE	Credit 11.1B/12.1B VISUAL COMFORT: DAYLIGHT	Credit 12/13 INDOOR POLLUTANTS	Credit 21C-D/21C-D SUSTAINABLE PRODUCTS – “Level A” Third Party Certification Environmental Product Declarations	Credit 22/22 CONSTRUCTION AND DEMOLITION WASTE
✓	✓	✓	✓	✓	✓



## Contact us

Armstrong Ceiling Solutions (Australia) Pty. Ltd.

NSW / ACT  
(02) 9748 1588

VIC / TAS  
(03) 8706 4000

QLD / NT  
(07) 3809 5565



info@armstrongceilings.com.au

www.armstrongceilings.com.au