

FEATURE PLANK SPECIFICATION SHEET

Moda Altro Collection Engineered T&G plank by Forté. 15mm thick, 220mm wide, 2190mm or 1830mm length. Direct stick installation method onto substrate. Feature grade, pre-finished with NatureMatte Lacquer

PRODUCT DETAILS

| | |
|------------------------|--|
| Collection | Moda Altro |
| Product Type | Engineered Plank |
| Availability | Stocked |
| Total Thickness | 15mm |
| Width | 220mm |
| Length | 2190mm (Mondello and Verona are also available in 1830mm length) |
| % of Shorts | Up to 17% |
| Wear Layer | 4mm Solid European Oak |
| Core | Hevea |
| Backing Layer | Spruce Veneer |
| Construction | 3-layer Engineered |
| Re-sands | Up to 2 (approx. 1mm removed per re-sand) |
| Surface Texture | Brushed |
| Surface Sheen | Extra Matte (4-6%) |
| Bevel | Micro bevel 4 sides |
| Status | Pre-finished (no additional coats required) |
| Finish | NatureMatte Lacquer (7 coats) |
| Species | European Oak |
| Wood Grade | Feature (refer page 2 for details) |
| Filler Colour | Dark |

The Moda Altro Collection is also available in: Light feature plank, herringbone pattern and stair nosing

STRUCTURAL WARRANTY

| | |
|----------------------------|--|
| 10 Year Commercial | For terms and conditions see |
| 25 Year Residential | www.forte.co.nz/warranties |

SUSTAINABILITY

PEFC® Certified



INSTALLATION

| | |
|------------------------------|--|
| Installation Method | Glue down (Double Stick for Multi-level) |
| Suitable Substrates | Plywood, Particle Board, Concrete, existing timber - enquire for others |
| Joint Profile | Tongue and Groove (4 sides) |
| Suitable Applications | Flooring, Walls, Ceilings |
| Suitable Uses | Residential homes, hospitality, retail stores, restaurants, apartments |
| Underfloor Heating | • Hydronic Systems • Electric Systems set in screed (ensure screed suitable for UFH) - enquire for others |
| Wet Area Suitability | Contact the Forté team for information 0508 35 66 77 |

TECHNICAL SPECIFICATIONS


| | |
|--|---|
| Reaction to Fire (Floors) | Critical Flux 5.0kw/m ² |
| Reaction to Fire (Walls and Ceilings) | Group 3 / Class Dfl-s1 (Group 1 can be achieved with intumescent coating) |
| Wear Layer Density | 700kg/m ³ |
| Formaldehyde Emission | |
| AS/NZS 2098.11 | E0 (0.1mg/L) Low VOC, No added Formaldehyde |
| Slip Ratings | |
| AS/NZS 4586 Wet Test | Classification F, Mean COF 0.60 |
| AS/NZS 4586 Dry Test | Classification X, Pendulum Mean 43 BPN |

PACK INFORMATION

| | |
|-----------------------------|-------------------------------|
| <u>2190mm Length</u> | |
| Pack Size | 2.890m ² |
| Pack Weight | 27.30kg |
| Pieces per pack | 5 full planks + 1 split plank |
| <u>1830mm Length</u> | |
| Pack Size | 2.416m ² |
| Pack Weight | 22.8kg |
| Pieces per pack | 5 full planks + 1 split plank |

Plank Profile

MODA ALTRO PLANK

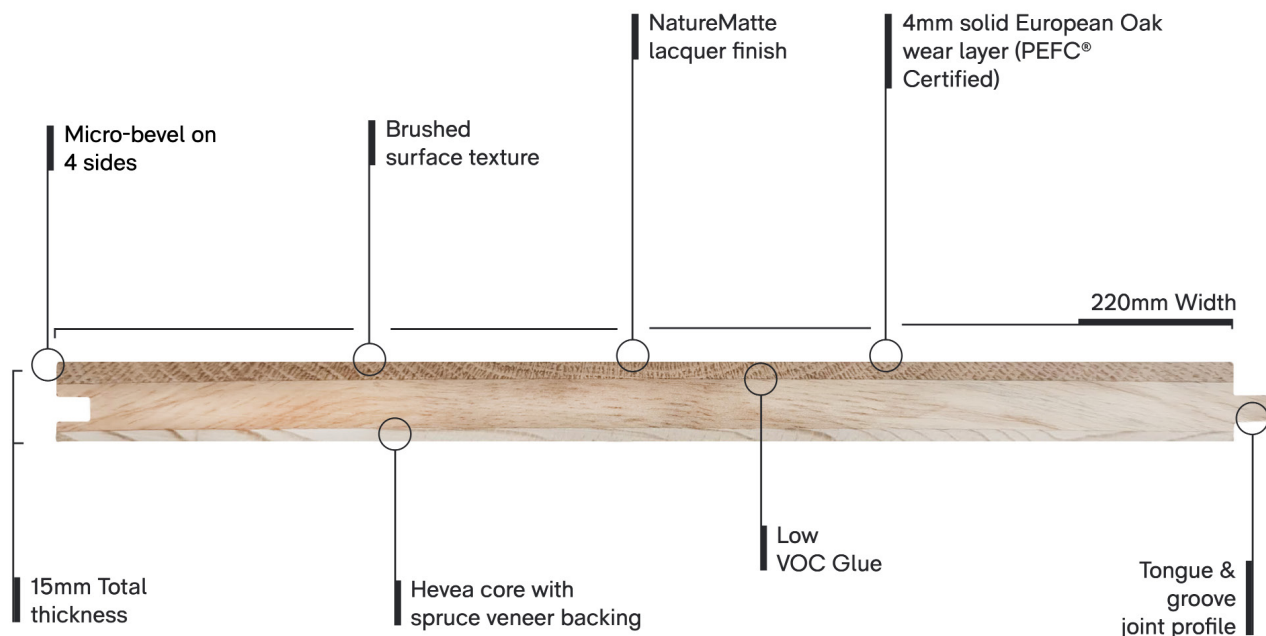

MODA ALTRO – FEATURE GRADE



A Moda Altro Feature grade plank will typically contain natural colour variation. This grade allows for frequent, larger knots and sapwood should be expected throughout the planks. Cracks and checks will be present and are finished with a dark shade of filler.

Care and Maintenance

RESIDENTIAL AND COMMERCIAL CARE AND MAINTENANCE

Forté's Product Specialists have collated our care and maintenance recommendations to ensure your flooring looks like new for years to come. Residential and Commercial projects require different levels of care and maintenance. Visit www.forte.co.nz/careandmaintenance

Structural Warranty

MODA ALTRO 25 YEAR RESIDENTIAL STRUCTURAL WARRANTY

The Moda Altro Collection comes with a full 25 year Residential Structural Warranty. For full warranty terms and conditions, please visit www.forte.co.nz/warranties

MODA ALTRO 10 YEAR COMMERCIAL STRUCTURAL WARRANTY

The Moda Altro Collection comes with a full 10 year Commercial Structural Warranty. For full warranty terms and conditions, please visit www.forte.co.nz/warranties

Installation

THE MODA ALTRO COLLECTION MUST BE INSTALLED BY A TRAINED PROFESSIONAL

Please ensure that you have read and understood the installation guidelines before proceeding to install Moda Altro timber flooring. If you have any questions or concerns, please call the Forté technical team on 0508 35 66 77. Failure to adhere to the Forté Installation Guidelines may void your warranty.

For full installation guidelines, please visit www.forte.co.nz/installation

LIGHT FEATURE PLANK SPECIFICATION SHEET

Moda Altro Collection Engineered T&G plank by Forté. 15mm thick, 220mm wide, 2190mm or 1830mm length. Direct stick installation method onto substrate. Light feature grade, pre-finished with NatureMatte Lacquer

PRODUCT DETAILS

| | |
|------------------------|---|
| Collection | Moda Altro |
| Product Type | Engineered Plank |
| Availability | Stocked |
| Total Thickness | 15mm |
| Width | 220mm |
| Length | 2190mm (Capri Light Feature is also available in 1830mm length) |
| % of Shorts | Up to 33% |
| Wear Layer | 4mm Solid European Oak |
| Core | Hevea |
| Backing Layer | Spruce Veneer |
| Construction | 3-layer Engineered |
| Re-sands | Up to 2 (approx. 1mm removed per re-sand) |
| Surface Texture | Brushed |
| Surface Sheen | Extra Matte (4-6%) |
| Bevel | Micro bevel 4 sides |
| Status | Pre-finished (no additional coats required) |
| Finish | NatureMatte Lacquer (7 coats) |
| Species | European Oak |
| Wood Grade | Light Feature (refer page 2 for details) |
| Filler Colour | Dark |


The Moda Altro Collection is also available in: Feature plank, herringbone pattern and stair nosing

STRUCTURAL WARRANTY


| | |
|----------------------------|--|
| 10 Year Commercial | For terms and conditions see |
| 25 Year Residential | www.forte.co.nz/warranties |

SUSTAINABILITY

PEFC® Certified



Capri Light Feature



Sorrento Light Feature

INSTALLATION

| | |
|------------------------------|--|
| Installation Method | Glue down (Double Stick for Multi-level) |
| Suitable Substrates | Plywood, Particle Board, Concrete, existing timber - enquire for others |
| Joint Profile | Tongue and Groove (4 sides) |
| Suitable Applications | Flooring, Walls, Ceilings |
| Suitable Uses | Residential homes, hospitality, retail stores, restaurants, apartments |
| Underfloor Heating | • Hydronic Systems • Electric Systems set in screed (ensure screed suitable for UFH) - enquire for others |
| Wet Area Suitability | Contact the Forté team for information 0508 35 66 77 |

TECHNICAL SPECIFICATIONS


| | |
|--|---|
| Reaction to Fire (Floors) | Critical Flux 5.0kw/m ² |
| Reaction to Fire (Walls and Ceilings) | Group 3 / Class Dfl-s1 (Group 1 can be achieved with intumescent coating) |
| Wear Layer Density | 700kg/m ³ |
| Formaldehyde Emission | |
| AS/NZS 2098.11 | E0 (0.1mg/L) Low VOC, No added Formaldehyde |
| Slip Ratings | |
| AS/NZS 4586 Wet Test | Classification F, Mean COF 0.60 |
| AS/NZS 4586 Dry Test | Classification X, Pendulum Mean 43 BPN |

PACK INFORMATION

| | |
|-----------------------------|--------------------------------|
| <u>2190mm Length</u> | |
| Pack Size | 2.890m ² |
| Pack Weight | 27.30kg |
| Pieces per pack | 4 full planks + 2 split planks |
| <u>1830mm Length</u> | |
| Pack Size | 2.416m ² |
| Pack Weight | 22.80kg |
| Pieces per pack | 4 full planks + 2 split planks |

Plank Profile

MODA ALTRO PLANK

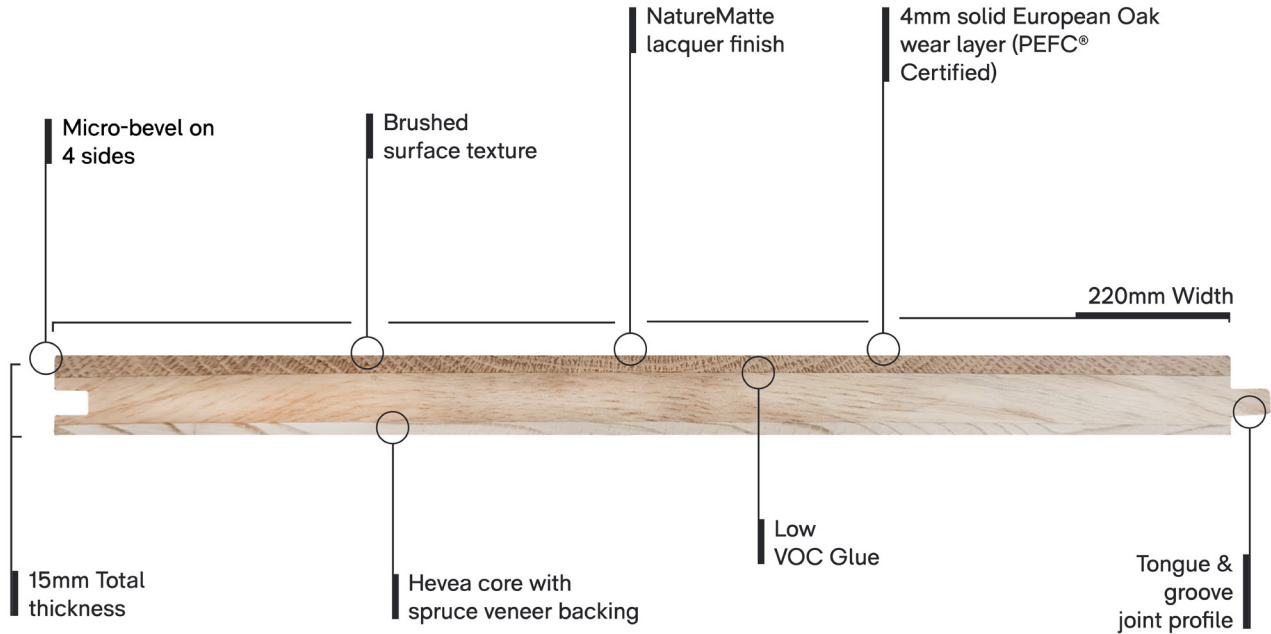

MODA ALTRO – LIGHT FEATURE GRADE



A Moda Altro Light Feature grade plank will consist of colour variation. You may see minimal sapwood throughout the planks as well as smaller and less frequent knots. Some small cracks and checks will be present and are finished with a dark shade of filler.

Care and Maintenance

RESIDENTIAL AND COMMERCIAL CARE AND MAINTENANCE

Forté's Product Specialists have collated our care and maintenance recommendations to ensure your flooring looks like new for years to come. Residential and Commercial projects require different levels of care and maintenance. Visit www.forte.co.nz/careandmaintenance

Structural Warranty

MODA ALTRO 25 YEAR RESIDENTIAL STRUCTURAL WARRANTY

The Moda Altro Collection comes with a full 25 year Residential Structural Warranty. For full warranty terms and conditions, please visit www.forte.co.nz/warranties

MODA ALTRO 10 YEAR COMMERCIAL STRUCTURAL WARRANTY

The Moda Altro Collection comes with a full 10 year Commercial Structural Warranty. For full warranty terms and conditions, please visit www.forte.co.nz/warranties

Installation

THE MODA ALTRO COLLECTION MUST BE INSTALLED BY A TRAINED PROFESSIONAL

Please ensure that you have read and understood the installation guidelines before proceeding to install Moda Altro timber flooring. If you have any questions or concerns, please call the Forté technical team on 0508 35 66 77. Failure to adhere to the Forté Installation Guidelines may void your warranty.

For full installation guidelines, please visit www.forte.co.nz/installation

HERRINGBONE FEATURE SPECIFICATION SHEET

Moda Altro Collection Engineered T&G Herringbone plank by Forté. 15mm thick, 138mm wide, in 690mm lengths. Glue Down installation method onto substrate. Feature grade, pre-finished with NatureMatte Lacquer.

PRODUCT DETAILS

| | |
|------------------------|--|
| Collection | Moda Altro |
| Product Type | Engineered Herringbone Plank |
| Availability | Stocked |
| Total Thickness | 15mm |
| Width | 138mm |
| Length | 690mm |
| Wear Layer | 4mm Solid European Oak |
| Core | Hevea |
| Backing | Spruce Veneer |
| Construction | 3-layer Engineered |
| Re-sands | Up to 2 (approx. 1mm removed per re-sand) |
| Surface Texture | Brushed |
| Surface Sheen | Extra Matte (4-6%) |
| Bevel | Micro bevel 4 sides |
| Status | Pre-finished (no additional coats required) |
| Finish | NatureMatte Lacquer (7 coats) |
| Species | European Oak |
| Wood Grade | Feature (refer page 2 for details) |
| Filler Colour | Dark |

The Moda Altro Collection is also available in: 220mm plank, herringbone light feature grade (selected colours) and stair nosing

STRUCTURAL WARRANTY


| | |
|----------------------------|--|
| 10 Year Commercial | For terms and conditions see |
| 25 Year Residential | www.forte.co.nz/warranties |

SUSTAINABILITY


PEFC® Certified



Mondello



Verona



Dolcedo

INSTALLATION

| | |
|------------------------------|--|
| Installation Method | Glue down (Double Stick for Multi-level) |
| Suitable Substrates | Plywood, Particle Board, Concrete, existing timber - enquire for others |
| Joint Profile | Tongue and Groove (4 sides) |
| Suitable Applications | Flooring, Walls, Ceilings |
| Suitable Uses | Residential homes, hospitality, retail stores, restaurants, apartments |
| Underfloor Heating | <ul style="list-style-type: none"> Hydronic Systems Electric Systems set in screed (ensure screed suitable for UFH) - enquire for others |
| Wet Area Suitability | Contact the Forté team for information 0508 35 66 77 |

TECHNICAL SPECIFICATIONS



| | |
|--|---|
| Reaction to Fire (Floors) | Critical Flux 5.0kw/m ² |
| Reaction to Fire (Walls and Ceilings) | Group 3 / Class Dfl-s1 (Group 1 can be achieved with intumescent coating) |
| Wear Layer Density | 700kg/m ³ |
| Formaldehyde Emission | |
| AS/NZS 2098.11 | E0 (0.1mg/L) Low VOC, No added Formaldehyde |
| Slip Ratings | |
| AS/NZS 4586 Wet Test | Classification F, Mean COF 0.60 |
| AS/NZS 4586 Dry Test | Classification X, Pendulum Mean 43 BPN |

PACK INFORMATION

| | |
|------------------------|----------------------|
| Pack Size | 0.571m ² |
| Pieces per pack | 3 x left + 3 x right |
| Pack Weight | 5.5kg |

Herringbone Profile

MODA ALTRO HERRINGBONE

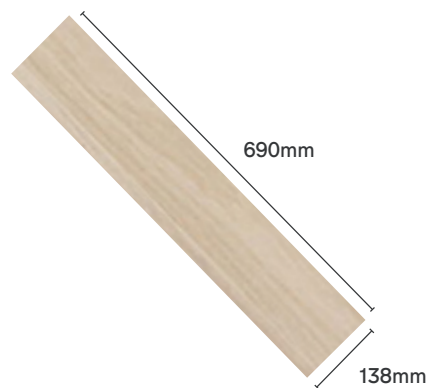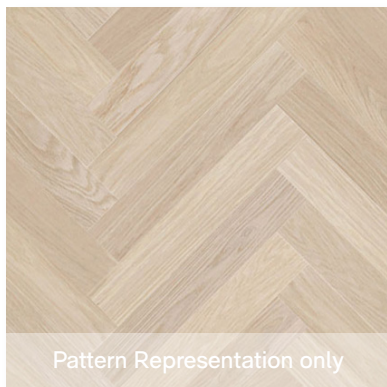

Plank is tongue and groove on all four sides. Product supplied in right and left planks.

MODA ALTRO – FEATURE GRADE



A Moda Altro Feature grade plank will typically contain natural colour variation. This grade allows for frequent, larger knots and sapwood should be expected throughout the planks. Cracks and checks will be present and are finished with a dark shade of filler.

Care and Maintenance

RESIDENTIAL AND COMMERCIAL CARE AND MAINTENANCE

Forté's Product Specialists have collated our care and maintenance recommendations to ensure your flooring looks like new for years to come. Residential and Commercial projects require different levels of care and maintenance. Visit www.forte.co.nz/careandmaintenance

Structural Warranty

MODA ALTRO 25 YEAR RESIDENTIAL STRUCTURAL WARRANTY

The Moda Altro Collection comes with a full 25 year Residential Structural Warranty. For full warranty terms and conditions, please visit www.forte.co.nz/warranties

MODA ALTRO 10 YEAR COMMERCIAL STRUCTURAL WARRANTY

The Moda Altro Collection comes with a full 10 year Commercial Structural Warranty. For full warranty terms and conditions, please visit www.forte.co.nz/warranties

Installation

THE MODA ALTRO COLLECTION MUST BE INSTALLED BY A TRAINED PROFESSIONAL

Please ensure that you have read and understood the installation guidelines before proceeding to install Moda Altro timber flooring. If you have any questions or concerns, please call the Forté technical team on 0508 35 66 77. Failure to adhere to the Forté Installation Guidelines may void your warranty.

For full installation guidelines, please visit www.forte.co.nz/installation

HERRINGBONE LIGHT FEATURE SPECIFICATION SHEET

Moda Altro Collection Engineered T&G Herringbone plank by Forté. 15mm thick, 138mm wide, in 690mm lengths. Glue Down installation method onto substrate. Light feature grade, pre-finished with NatureMatte Lacquer.

PRODUCT DETAILS

| | |
|------------------------|--|
| Collection | Moda Altro |
| Product Type | Engineered Herringbone Plank |
| Availability | Stocked |
| Total Thickness | 15mm |
| Width | 138mm |
| Length | 690mm |
| Wear Layer | 4mm Solid European Oak |
| Core | Hevea |
| Backing | Spruce Veneer |
| Construction | 3-layer Engineered |
| Re-sands | Up to 2 (approx. 1mm removed per re-sand) |
| Surface Texture | Brushed |
| Surface Sheen | Extra Matte (4-6%) |
| Bevel | Micro bevel 4 sides |
| Status | Pre-finished (no additional coats required) |
| Finish | NatureMatte Lacquer (7 coats) |
| Species | European Oak |
| Wood Grade | Light Feature (refer page 2 for details) |
| Filler Colour | Dark |


The Moda Altro Collection is also available in: 220mm plank, herringbone feature grade (selected colours) and stair nosing

STRUCTURAL WARRANTY


| | |
|----------------------------|--|
| 10 Year Commercial | For terms and conditions see |
| 25 Year Residential | www.forte.co.nz/warranties |

SUSTAINABILITY

PEFC® Certified



Capri Light Feature



Sorrento Light Feature

INSTALLATION

| | |
|------------------------------|--|
| Installation Method | Glue down (Double Stick for Multi-level) |
| Suitable Substrates | Plywood, Particle Board, Concrete, existing timber - enquire for others |
| Joint Profile | Tongue and Groove (4 sides) |
| Suitable Applications | Flooring, Walls, Ceilings |
| Suitable Uses | Residential homes, hospitality, retail stores, restaurants, apartments |
| Underfloor Heating | • Hydronic Systems • Electric Systems set in screed (ensure screed suitable for UFH) - enquire for others |
| Wet Area Suitability | Contact the Forté team for information 0508 35 66 77 |

TECHNICAL SPECIFICATIONS



| | |
|--|---|
| Reaction to Fire (Floors) | Critical Flux 5.0kw/m ² |
| Reaction to Fire (Walls and Ceilings) | Group 3 / Class Dfl-s1 (Group 1 can be achieved with intumescent coating) |
| Wear Layer Density | 700kg/m ³ |
| Formaldehyde Emission | |
| AS/NZS 2098.11 | E0 (0.1mg/L) Low VOC, No added Formaldehyde |
| Slip Ratings | |
| AS/NZS 4586 Wet Test | Classification F, Mean COF 0.60 |
| AS/NZS 4586 Dry Test | Classification X, Pendulum Mean 43 BPN |

PACK INFORMATION

| | |
|------------------------|----------------------|
| Pack Size | 0.571m ² |
| Pieces per pack | 3 x left + 3 x right |
| Pack Weight | 5.5kg |

Herringbone Profile

MODA ALTRO HERRINGBONE

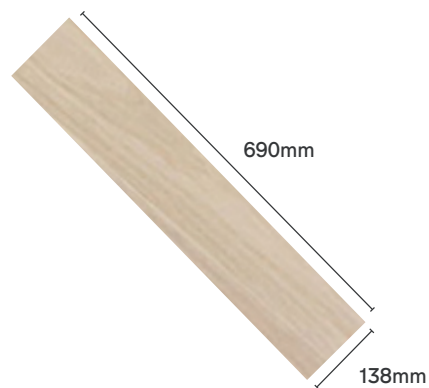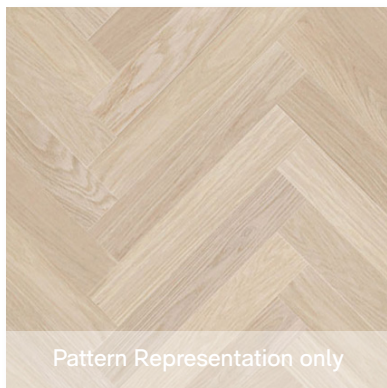

Plank is tongue and groove on all four sides. Product supplied in right and left planks.

MODA ALTRO – LIGHT FEATURE GRADE



A Moda Altro Light Feature grade plank will consist of colour variation. You may see minimal sapwood throughout the planks as well as smaller and less frequent knots. Some small cracks and checks will be present and are finished with a dark shade of filler.

Care and Maintenance

RESIDENTIAL AND COMMERCIAL CARE AND MAINTENANCE

Forté's Product Specialists have collated our care and maintenance recommendations to ensure your flooring looks like new for years to come. Residential and Commercial projects require different levels of care and maintenance. Visit www.forte.co.nz/careandmaintenance

Structural Warranty

MODA ALTRO 25 YEAR RESIDENTIAL STRUCTURAL WARRANTY

The Moda Altro Collection comes with a full 25 year Residential Structural Warranty. For full warranty terms and conditions, please visit www.forte.co.nz/warranties

MODA ALTRO 10 YEAR COMMERCIAL STRUCTURAL WARRANTY

The Moda Altro Collection comes with a full 10 year Commercial Structural Warranty. For full warranty terms and conditions, please visit www.forte.co.nz/warranties

Installation

THE MODA ALTRO COLLECTION MUST BE INSTALLED BY A TRAINED PROFESSIONAL

Please ensure that you have read and understood the installation guidelines before proceeding to install Moda Altro timber flooring. If you have any questions or concerns, please call the Forté technical team on 0508 35 66 77. Failure to adhere to the Forté Installation Guidelines may void your warranty.

For full installation guidelines, please visit www.forte.co.nz/installation